# Baodi 50MW Distributed PV Power Generation Project in Tianjin and Dashiqiao 50MW Distributed PV Power Generation Project in Liaoning

Report on

# Environmental and Social Impact Assessment and Environmental and Social Management Plan

Project sponsor: Beijing Xiangju New Energy Technology Co., Ltd. Prepared by: POWERCHINA HUADONG Engineering Corporation

Limited

August 2022

# Foreword

As the world energy issues rank first among the top ten hot issues in the world, especially with the development of the world economy, the sharp increase in world population, and the continuous improvement of people's living standards, the world energy demand continues to increase, which thereby leads to the gradual depletion of global fossil energy, the aggravation of environmental pollution and the increasing pressure of environmental protection. China is one of the largest coal producers and consumers in the world, and also one of the few countries with coal as the main energy source. In energy production and consumption, coal accounts for about 70% of commodity energy consumption, and has become the main source of air pollution in China. Therefore, vigorously developing new and renewable energy technologies such as solar energy, wind energy, biomass energy, geothermal energy and ocean energy will become one of the important measures to reduce environmental pollution. According to China's National Climate Change Programme and the Medium-and Long-Term Development Plan of Renewable Energy, China will vigorously develop renewable energy and optimize the energy consumption structure. In the future, the focus and main task of China's work in the energy field will still be to speed up the adjustment of the energy industry structure and strive to improve the development and production capacity of clean energy. Focusing on solar power, wind power, solar water heaters, and large-scale methane gas projects, and aiming at "equipment localization, product standardization, large industrial scale, and market standardization", we will accelerate the development of renewable energy. Therefore, accelerating the development of renewable energy, optimizing the energy consumption structure, increasing the proportion of clean energy and reducing the emission of greenhouse gases and harmful gases are the top priorities for China's sustainable energy and environmental development.

In this context, Beijing Xiangju New Energy Technology Co., Ltd. plans to build a 50MW distributed PV power generation project in Baodi District, Tianjin and a 50MW distributed PV power generation project in Dashiqiao City, Liaoning. The construction of the Project complies with the sustainable development principle and the national energy development policy, can relieve the environmental protection pressure, and speed up local economic development.

In accordance with the relevant requirements of the Bank's Environmental and Social Framework, the Environmental Protection Law of the People's Republic of China, the Law of the People's Republic of China on Environmental Impact Assessment, the Notice of the National Development and Reform Commission on Issuing the Interim Measures for Social Stability Risk Assessment of Major Fixed Assets Investment Projects of the National Development and Reform Commission, and the relevant provisions of Order No.253 of the State Council Regulations on the Administration of Environmental Protection of Construction Projects, Beijing Xiangju New Energy Technology Co., Ltd. entrusted POWERCHINA HUADONG Engineering Corporation Limited to prepare a report on ESIA and ESMP. After accepting the entrustment, we carefully analyzed and studied the preliminary work results of the Project, collect relevant data, carried out a field survey and investigation, paid attention to the whole process of risk management and ecologically sensitive area protection, and carried out public participation investigation in accordance with relevant national regulations. This Report is prepared on the basis of the results of related studies, expert advice, and public participation opinions on the Project.

# Contents

1 General	7
1.1 Basis of preparation	7
1.2 Work Contents	16
1.3 Scope of work	17
1.4 Assessment Standard	19
1.5 Environmental Protection Objectives and Stakeholders	25
2 Project Overview	32
2.1 Project sponsor's Information	32
2.2 Geographical Location	33
2.3 Necessity of Project Construction	33
2.4 Project Task and Scale	40
2.5 Project Composition	41
2.6 Roof Resources Required for Project Construction and Acquisition Me	thods
	45
2.7 Construction Organization Design	46
2.8 Project Investment Estimate	49
3. Environmental and social profile	52
3.1 Natural Environment	52
3.2 Social Environment	54
4. Comparison and Analysis of Project Schemes	60
4.1 With/without Project Analysis	60
4.2 Analysis of Project Site Selection	61
4.3 Comparison and Analysis of Engineering Technology	68
5. Social and Environmental Impact Assessment	77
5.1 Legitimacy of project establishment	77
5.2 Conformity with Industrial Policies	77
5.3 Legitimacy of site selection and route selection	77
5.4 Legitimacy of approval procedures	77

5.5 Understanding of Stakeholders
5.6 Impact on Indigenous Peoples79
5.7 Impact of Labor Inflow during Construction Period80
5.8 Analysis on Environmental Impact81
6. Stakeholder Engagement and Information Disclosure
6.1 Identification of Stakeholder
6.2 Communication between the Government and State-owned Enterprises88
6.3 Public Participation
6.4 Public Opinion Survey Results and Analysis90
6.5 Project Publicity101
7. Establishment and Management of GRM119
7.1 Establishment of GRM119
7.2 Early Grievances of the Project121
8. Environmental and Social Management Measures
8.1 Protection of the Rights and Interests of Farmers122
8.2 Protection of Population Health123
8.3 HSE-compliant Construction Management124
8.4 Information Disclosure and Communication126
8.5 Environmental Protection Measures during Construction Period128
8.6 Environmental Protection Measures during Operation130
9. Environmental and Social Monitoring Plan131
9.1 Environmental Protection Management Plan131
9.2 Environmental Monitoring Plan132
9.3 Social Monitoring Plan132
10. Analysis of Environmental, Social and Economic Gain and Loss134
10.1 Analysis of Social, Economic and Environment Effects134
10.2 Social and environmental protection investment
11. Conclusions and Suggestions
11.1 Comprehensive Conclusions
11.2 Recommendations141

Annex 1: Registration Form for Fixed Assets Investment Projects of Domestic-funded
Enterprises in Tianjin
Annex 2: Filing Certificate of Roof and Courtyard Distributed PV Power Generation
Project of Yingkou Huirong Power Engineering Co., Ltd144
Annex 3: ESIA Information Publicity of Dashiqiao and Baodi Distributed PV Projects
Annex 4: Scanning Copy of Questionnaire for Dashiqiao and Baodi Distributed PV
Projects (Partial)

# 1 General

1.1 Basis of preparation

1.1.1 Relevant regulations and documents

1.1.1.1 Relevant national laws

Environmental Protection Law of the People's Republic of China (January 2015)

(2) Law of the People's Republic of China on Environmental Impact Assessment (December 2018);

(3) Law of the People's Republic of China on the Prevention and Control of WaterPollution (January 2018);

(4) Law of the People's Republic of China on Prevention and Control of Atmospheric Pollution (October 2018);

(5) Laws of the People's Republic of China on Prevention and Control of Environmental Noise Pollution (June 2022);

(6) Law of the People's Republic of China on the Prevention and Control of Environmental Pollution by Solid Waste (September 2020);

(7) Water and Soil Conservation Law of the People's Republic of China (March 2011);

(8) Law of the People's Republic of China on Land Administration (August 2004);

(9) Water Law of the People's Republic of China (January 2013);

(10) Urban and Rural Planning Law of the People's Republic of China (April 2015);

(11) Water Law of the People's Republic of China (June 2013);

1.1.1.2 Relevant national regulations and documents

(1) The Notice of the National Development and Reform Commission on Issuing the Interim Measures for Social Stability Risk Assessment of Major Fixed Assets

Investment Projects of the National Development and Reform Commission (FGTZ [2012] No.2492), National Development and Reform Commission, August 16, 2012;

(2) The Notice of the General Office of National Development and Reform Commission on Printing and Distributing the Preparation Outline for Analysis Articles and Assessment Report of Social Stability Risk of Major Fixed Assets Investment Projects (Trial) (FGBTZ [2013] No. 428) (February 17, 2013);

(3) Guidance on Establishing and Improving the Social Stability Risk Assessment Mechanism for Major Decision-Making (trial) (ZBF [2012] No.2);

(4) Several Opinions on Deepening the Participation of Third-party Institutions in Social Stability Risk Assessment (trial);

(5) Regulations on the Administration of Environmental Protection for Construction Projects (amended by Order No.682 of the State Council) (October 1, 2017);

(6) Decision of the State Council on Implementing Scientific Concept of
 Development and Strengthening Environmental Protection (GF [2005] No. 39)
 (December 3, 2005);

(7) Regulations on Land Reclamation (November 8, 1988);

(8) Regulation on Land Reclamation (Order of the State Council of the People's Republic of China (No. 592), (March 5, 2011)

(9) Regulations of the People's Republic of China on the Protection of Basic Farmland (Order No.257 of the State Council) (July 1, 2021);

(10) List of National Key Protected Wildlife in China (February 5, 2021);

(11) List of National Key Protected Wild Plants in China (September 7, 2021);

(12) National Overall Emergency Plan on Public Emergency, State Council(January 8, 2006);

(13) Opinions on Strengthening the Supervision of Ecological EnvironmentProtection for Resource Development (HF [2004] No.24) (February 12, 2004);

(14) Notice on Issuing the List of Major Changes in Construction Projects in

Partial Industries in Environmental Impact Assessment Management (HB [2015] No.52) (June 4, 2015);

(15) Several Opinions of the General Office of the CPC Central Committee and the General Office of the State Council on Delineating and Strictly Observing the Red Line of Ecological Protection (February 7, 2017);

(16) Implementation Opinions on Strengthening the In-process and Post-event
 Supervision of Environmental Impact Assessment of Construction Projects, HHP [2018]
 No. 11, (January 25, 2018);

1.1.2 Technical guidelines and relevant standards

- Technical Guidelines for Construction Environmental Impact Assessment -General Programme (HJ 2.1-2016);
- (2) Technical Guidelines for Environmental Impact Assessment Atmospheric Environment (HJ2.2-2018);
- (3) Technical Guidelines for Environmental Impact Assessment Surface Water Environment (HJ 2.3-2018);
- (4) Technical Guidelines for Environmental Impact Assessment Acoustic Environment (HJ 2.4-2021);
- (5) Technical Guidelines for Environmental Impact Assessment Ecological Impact (HJ 19-2022);
- (6) Technical Criterion for Eco-environmental Status Evaluation (HJ192-2015);
- (7) Technical Specifications Requirements for Monitoring of Surface Water and Wastewater (HJ/T 91-2002);
- (8) Technical Specifications for Quality Assurance and Quality Control for Monitoring of Stationary Pollution Sources (trial) (HJ/T 373-2007);
- (9) Standard for Monitoring Ambient Air Quality (trial) (Announcement No.4 of the State Environmental Protection Administration in 2007);
- (10) Environmental Quality Standard for Surface Water (GB 3838-2002)
- (11) Ambient Air Quality Standards (GB3095-2012);

- (12) Environmental Quality Standards for Noise (GB 3096-2008);
- (13) Integrated Wastewater Discharge Standard (GB 8978-1996);
- (14) Comprehensive Emission Standard of Atmospheric Pollutant (GB 16297-1996);
- (15) Emission Standard of Environment Noise for Boundary of Construction
   Site (GB 12523-2011);
- (16) Emission Standard for Industrial Enterprises Noise at Boundary (GB 12348-2008);
- (17) Current Land Use Classification (GB/T 21010-2007).
- 1.1.3 Relevant planning and zoning documents
  - Outline of the 14th Five-Year Plan for National Economic and Social Development of Baodi District, Tianjin;
  - (2) Tianjin Ecological Protection Red Line;
  - (3) 14th Five-Year Plan for Ecological Environmental Protection of Tianjin City;
  - (4) 14th Five-Year Plan of National Economic and Social Development of Yingkou City;
  - (5) Yingkou Ecological Protection Red Line;
  - (6) 14th Five-Year Plan for Ecological Environment Protection of Yingkou City.
- 1.1.4 Technical Data
  - Feasibility Study Report of Dashiqiao 50MW Distributed PV Power Generation Project in Liaoning;
  - Feasibility Study Report of Baodi 50MW Distributed PV Power Generation Project in Tianjin.
- 1.1.5 Relevant Requirements of the Bank

This Report is prepared in accordance with the Environmental and Social Framework issued by the Bank. The relevant policy requirements in the *Environmental* and Social Framework include the following aspects.

1.1.5.1 Basic definitions and provisions in the Environmental and Social Framework

**Client:** means the recipient of the Bank financing for a Project and any other entity responsible for the implementation of the Project.

**Project:** means the specific set of activities for which the Bank financing is provided, as defined in the agreement governing such financing, regardless of the financing instrument or the source of such financing or whether the Project is financed in whole or in part by the Bank.

## The environmental and social framework includes:

• Environmental and Social Policy (ESP), including mandatory environmental and social requirements for each project.

• Environmental and social standard. Three associated mandatory environmental and social standards (ESSs) set out more detailed environmental and social requirements relating to the following:

ESS1: Environmental and Social Assessment and Management;

ESS2: Involuntary Resettlement

**ESS3:** Indigenous Peoples

• List of environmental and social exclusions. The Bank will not knowingly finance a Project that involves activities or items specified in this list (Exclusion List).

ESP applicable scope:

Applicable to all projects. The Bank requires each client to manage the environmental and social risks and impacts associated with its Project in a manner designed to meet the ESP and the applicable ESSs in accordance with the environmental and social management plan (ESMP), and environmental and social management planning framework (ESMPF), as applicable, required for the Project under this ESP and ESSs.

1.1.5.2 Project classification

The Bank classifies the proposed projects into four categories as follows:

• Category A. A project is classified as Category A if it is likely to have significant

adverse environmental and social impacts that are irreversible, cumulative, diverse or unprecedented. These impacts may affect areas outside the project site, either temporarily or permanently. The Bank requires the Client to conduct an Environmental and Social Impact Assessment (ESIA) or equivalent environmental and social assessment, for each Category A Project, and to prepare an Environmental and Social Management Plan (ESMP) or Environmental and Social Management Planning Framework (ESMPF), which is included in the ESIA report for the Project. The ESIA for a Category A Project examines the Project's potential environmental and social impacts, both positive and adverse, compares them with those of feasible alternatives (including the "without Project" situation), and recommends any measures needed to avoid, minimize, mitigate, or compensate for adverse impacts and improve the environmental and social performance of the Project.

• Category B. A Project is categorized B when: it has a limited number of potentially adverse environmental and social impacts; the impacts are not unprecedented; few if any of them are irreversible or cumulative; they are limited to the Project area, and can be successfully managed using good practice in an operational setting. The Bank requires the Client to conduct an initial review of the environmental and social impacts of the Project. Based on the initial review, the Bank, in consultation with the Client, will identify appropriate tools for the Client to assess the environmental and social risks and impacts of the Project one by one. The Bank may determine an environmental and social assessment or other similar assessment applicable to the Project. The scope of the assessment may vary from project to project but is narrower than the ESIA scope for Category A projects. As in the case of a Category A Project, the assessment examines the Project's potentially negative and positive environmental and social impacts and recommends any measures needed to avoid, minimize, mitigate, or compensate for adverse impacts and improve the environmental and social performance of the Project.

•Category C. A project is classified as Category C when it is likely to have minimal

\*OFFICIAL USE ONLY

or no adverse environmental and social impacts. The Bank does not require an environmental and social assessment of the Project, but requires the Client to review the environmental and social impacts of the Project.

• Type FI. A project is classified as FI if it involves investment in or through a financial intermediary (FI). Whereby the Bank delegates to the FI the decision-making on the use of the Bank funds, including the selection, evaluation, approval, and monitoring of the Bank-financed components. The Bank requires the FI Client, through the implementation of appropriate environmental and social policies and procedures, to screen and categorize components as category A, B or C; review; conduct due diligence on; and monitor the environmental and social risks and impacts associated with the Bank-financed subprojects, all in a manner consistent with this ESP. A Project categorized as FI is also subject to: (a) the Environmental and Social Exclusion List and applicable host country national laws for all Bank-financed components; and (b) the applicable ESSs for the Bank-financed components that are classified as Category A components that are classified as Category B components).

1.1.5.3 Environmental and social standard requirements

When the Bank has determined, in consultation with the Client, that the Project has potentially adverse environmental or social risks and impacts, it requires the Client:

To conduct an environmental and social assessment relating to these risks and impacts, and design appropriate measures to avoid, minimize, mitigate, offset or compensate for them, all as required under ESS 1.

• If the Project will result in Involuntary Resettlement, this issue should be addressed in the social section of the assessment report, complemented by further elaboration as required under ESS2. The Client shall include Involuntary Resettlement in the Resettlement Plan (RP) or Resettlement Planning Framework (RPF), which is provided to the Bank as a freestanding document, an annex to the assessment report, or incorporated into the report as a recognizable element.

If the Project will affect Indigenous Peoples, this issue should be addressed in the social section of the assessment report, complemented by further elaboration as required under ESS3. The Client covers impacts on Indigenous Peoples in an Indigenous Peoples plan (Indigenous Peoples plan) or Indigenous Peoples planning framework (IPPF), which is provided to the Bank as a freestanding document, an annex to the assessment report, or incorporated into the report as a recognizable element.

1.1.5.4 Involuntary resettlement

Involuntary resettlement: It covers physical displacement (relocation, loss of residential land or loss of shelter) and economic displacement (loss of land or access to land and natural resources; loss of assets or access to assets, income sources or means of livelihood).

The Bank screens each Project to determine whether or not it involves Involuntary Resettlement (which covers both physical and economic displacement, as defined in ESS2). Where it is impossible to avoid involuntary resettlement, the Client is required to ensure that resettlement activities are conceived and implemented as a sustainable development plan and that adequate resources are provided to ensure that the resettlers in the Project can share the project benefits. If the Project involves Involuntary Resettlement, AIIB requires the Client to prepare an RP or RPF (as applicable) that is proportional to the extent and degree of the impacts. The degree of impact is determined by: (1) the scope of physical and economic displacement; and (2) the vulnerability of the affected population. The RP complements the social risks and impacts and provides specialized guidance to address the specific issues associated with Involuntary Resettlement, including land expropriation, livelihood restoration for resettled people and resettlement. The Bank does not endorse illegal settlement; however, it recognizes that significant populations have already inhabited both urban and rural land without title or recognized land rights. In view of this, the Bank requires the Client to ensure that resettlers without title to land or any identifiable legal land rights are eligible for and receive resettlement assistance and compensation for non-land assets and are

included in the resettlement consultation process within the deadlines established in the Resettlement Plan.

**Relevant facilities.** Related facilities refer to activities not included in the project description in the project management agreement, but determined by the Bank, after consulting with the Client, as being or to be: (1) directly and substantially related to the Project; (2) carried out or planned to be carried out simultaneously with the Project; (3) essential to the feasibility of the Project and not be constructed or expanded if the Project does not exist. Related facilities controlled or not controlled by the Client. The Bank requires the Client to identify and assess the potential environmental and social risks and impacts of the related facilities as part of the environmental and social assessment. More specifically,

• To the extent that the Client controls or influences the related facilities, the bank requires the Client to: (1) within the sphere of its control or influence over the related facilities, the Client must meet the requirements of ESP and ESS for such facilities; (2) if the related facilities are funded by another multilateral development bank or bilateral development organization, AIIB may use the requirements of the said development partner in place of all or part of the requirements in ESP and ESS, provided that, in its judgment, there is no material difference between these requirements and those specified in ESP and ESS.

• If the Client does not control or influence the related activities, the potential environmental and social risks and impacts of such facilities on the Project will be identified in the environmental and social assessment.

• The Client must demonstrate to the satisfaction of the bank that it has no control or influence over the related facilities by providing details of its considerations, including legal, regulatory and institutional factors.

# 1.1.5.5 Resettlement Plan

To avoid Involuntary Resettlement wherever possible; to minimize Involuntary Resettlement by exploring Project alternatives; where avoidance of Involuntary Resettlement is not feasible, to enhance, or at least restore, the livelihoods of all resettled people in real terms relative to pre-Project levels; to improve the overall socioeconomic status of the resettled poor and other vulnerable groups; and to conceive and implement resettlement activities as sustainable development programs, providing sufficient resources to enable the persons displaced by the Project to share in Project benefits.

1.1.6 Relevant regulations of the World Bank

The contractor and subcontractor will follow the environmental and social security policies of the World Bank, especially following the business policies/World Bank's Procedures below.

OP/BP 4.01Environmental evaluation;

OP/BP 4.04 Natural habitats;

OP/BP 4.11 Physical cultural resources;

OP/BP 4.12 Involuntary resettlement;

BP 17.50 Information disclosure;

EHS Codes.

# 1.2 Work Contents

The Project is a report on ESIA and ESMP of Dashiqiao and Baodi Distributed PV Projects. The report mainly includes two aspects: ESIA and ESMP.

(1) ESIA

Identify environmental and social factors and determine the environmental and social impact assessment level and corresponding standards according to the basic situation of Dashiqiao and Baodi Distributed PV Projects. A project risk assessment scheme is formulated. With the cooperation of the Project sponsor, the site survey and investigation are carried out, and the locations of the stakeholders involved in the Project are publicized. A questionnaire is issued to some relevant units and individuals to solicit appeals and opinions on the Project. Investigate the basic situation of the project environment, and analyze and predict the impact of the Project on the environment.

(2) ESMP

Put forward corresponding environmental protection measures and monitoring plans according to the environmental impact assessment. On the basis of site investigation and consultation with all parties, the legality and compliance of the project construction are fully, objectively and scientifically demonstrated, and the corresponding social management plan and monitoring plan are put forward. Establish information disclosure consultation channels, and establish grievance redress mechanisms (GRMs) and other social risk precautionary approaches. The social and economic benefits of the Project are analyzed, and finally the conclusions of ESIA and ESMP are given.

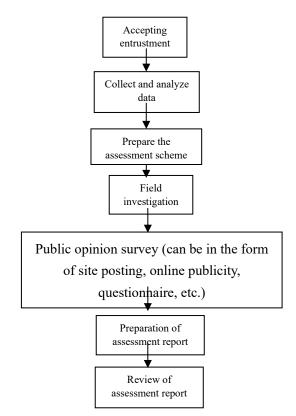


Figure 1.2-1 Workflow for Preparation of ESIA and the ESMP Report

# 1.3 Scope of work

# 1.3.1 Water Environment

According to the relevant provisions of Technical Guidelines for Environmental

Impact Assessment-Surface Water Environment (HJ 2.3-2018) and Technical Guidelines for Environmental Impact Assessment-Groundwater Environment (HJ610-2016), the scope of water environment assessment is the surface water bodies involved in the Project.

The surface water bodies around the distributed PV project in Dashiqiao City, Liaoning Province mainly include Daqing River, Daliao River, Shengtian River, Erdao River, and other rivers and their tributaries. The surface water bodies that may be involved in the distributed PV project in Baodi District of Tianjin City mainly include Chaobaixin River, Qinglongwan River, the open channel leading the Luanhe River into Tianjin, the Juhe River, and other rivers and their tributaries.

#### 1.3.2 Atmospheric Environment

The assessment scope of the atmospheric environment is within the area with a radius of 500m centered on each construction area, and 200m on both sides of the construction road.

#### 1.3.3 Acoustic Environment

According to relevant provisions of Technical Guidelines for Environmental Impact Assessment-Acoustic Environment (HJ 2.4-2021), the assessment scope of the acoustic environment is determined to be 200m outside the boundary of each construction area and construction road.

#### 1.3.4 Social Environment

The preliminarily selected site of the Dashiqiao 50MW distributed PV project includes 17 towns and subdistricts in Dashiqiao City, Liaoning Province, namely Jinqiao Subdistrict, Gangdu Subdistrict, Baizhai Subdistrict, Meidu Subdistrict, Shuiyuan Town, Gouyan Town, Shifo Town, Gaokan Town, Qikou Town, Huzhuang Town, Guantun Town, Boluopu Town, Yong'an Town, Tangchi Town, Jianyi Town, Huangtuling Town, and Zhoujia Town.

The preliminarily selected site of Baodi 50MW Distributed PV Project in Tianjin includes 10 towns and subdistricts in Baodi District, Tianjin, namely Chaoyang

Subdistrict, Wangbuzhuang Town, Fangjiazhuang Town, Xin'an Town, Huogezhuang Town, Xinkaikou Town, Niudaokou Town, Shigezhuang Town, Haogezhuang Town, and Niujiapai Town.

# 1.4 Assessment Standard

# 1.4.1 Environmental Quality Standards

(1) Surface Water Environmental Quality Standard

According to the water function zoning of Liaoning Province, the main rivers and their water function zones and water quality objectives involved in the 50MW distributed PV power generation project in Dashiqiao City, Liaoning Province and the 50MW distributed PV power generation project in Baodi District, Tianjin are shown in Table 1.4-1 and Table 1.4-2.

Water Quality Objectives of Main Rivers of Dashiqiao 50MW Distributed PV Project

in Liaoning

Table	1.4-1:			
S/N	Code of Water Functional Zone	Name of Water Functional Zone	River	Water quality target
1	B0402000303000	Yingkou Development and Utilization Zone of Daliao River	· IV	
2	B0402000303013	Sanchahekou Agricultural Water Consumption Zone of Daliao River	Daliao River	IV
3	B0402000303022	Industrial Water Consumption Zone and Agricultural Water Consumption Zone of Shangkouzi of Daliao River	Daliao River	IV
4	B0402000303037	Sewage Discharge Control Zone at the Estuary of Huzhuang River in Daliao River	Daliao River	*
5	B0402000404000	Yingkou Buffer Zone, Daliao River	Daliao River	IV
6	B0601007703000	Gaizhou Development and Utilization Zone, Shengtian River	Shengtia n River	V
7	B0601007703013	Gaizhou Agricultural Water Consumption Zone, Shengtian River	Shengtia n River	V
8	B0601007901000	Dashiqiao Source Water Conservation Zone, Daqing River	Daqing River	Π
9	B0601008003000	Gaizhou Development and	Daqing	II~IV

S/N	Code of Water Functional Zone	Name of Water Functional Zone River		Water quality target
		Utilization Zone, Daqing River	River	
10	B0601008003011	Drinking Water Source Zone and Industrial Water Consumption Zone of Shimen Reservoir, Daqing River		Π
11	B0601008003021	Agricultural Water ConsumptionZone and Drinking Water SourceDaqingZone of Railway Bridge, DaqingRiverRiverRiver		Ш
12	B0601008003037	Railway Bridge Sewage Control Zone, Daqing River	Daqing River	*
13	B0601008003046	Xihai Barrage Transition Zone, Daqing River	Daqing River	IV
14	B0601008104000	Gaizhou Buffer Zone, Daqing River	Daqing River	IV
15	B0601009003000	Gaizhou Development and Utilization Zone, Erdao River	Erdao River	III
16	B0601009003013	Gaizhou Agricultural Water Consumption Zone and Fishery Water Consumption Zone, Erdao River	Erdao River	Ш

# Water Quality Objectives of Main Rivers of Baodi 50MW Distributed PV Project in

# Tianjin

S/N	Name of Water Functional Zone	Initial section	Termination section	River	Water quality target	
	Tianjin Fi	rst-class Water E	nvironment Funct	ion Zoning		
1	Conservation area	Jiuwangzhuang	Dazhangzhuang	Open channel leading the Luanhe River into Tianjin	Ш	
2	Buffer zone	Tianjin-Hebei border	Huangjiaji Bridge	Lead the Juhe River into the Caobaixin River	III~IV	
3	Development and utilization area	Huangjiaji Bridge	Zhuliuzhuang Gate	Lead the Juhe River into the Caobaixin River	IV	
4	Buffer zone	Niumutun	Zhuliuzhuang Gate	Chaobaixin River	IV	
5	Development and utilization area	Zhuliuzhuang Gate	Ningchegu Gate	Chaobaixin River	III~IV	
6	Buffer zone	Tumen Tower	Dakoutun	Qinglongwan Jianhe River	III	
7	Development and utilization area	Dakoutun	Chaobaixin River	Qinglongwan Jianhe River	III	
8	Buffer zone	Maoshan	Huangyaguan	Juhe River	III	
9	Development and utilization area	Huangyaguan	Luozhuangzi	Juhe River	III	
10	Buffer zone	Sanhe River	Xinzhuang	Juhe River	III	
11	Development and utilization area	Xinzhuang	Jiuwangzhuang	Juhe River	IV	
12	Development and utilization area	Jiuwangzhuang	Xin'an Town	Jiyun River	IV	
13	Buffer zone	Xin'an Town	Jiangwakou	Jiyun River	IV	
14	Development and utilization area	Jiangwakou	Jiyun River Gate	Jiyun River	IV	
	Tianjin Second-class Water Environment Function Zoning					

15	Water space for agriculture	Huangjiaji Bridge	Zhuliuzhuang Gate	Lead the Juhe River into the Caobaixin River	IV
16	Water space for fishery	Zhuliuzhuang Gate	Lizigu Gate	Chaobaixin River	III
17	Water space for industry	Lizion Coto	Ningchegu	Chaobaixin River	IV
18	Water space for agriculture	Lizigu Gate	Gate	Chaobaixin River	IV
19	Water space for agriculture	Chaobaixin		Qinglongwan Jianhe River	III
20	Water space for industry	Dakoutun	River	Qinglongwan Jianhe River	III
21	Drinking water source area	Huangyaguan	Luozhuangzi	Juhe River	III
22	Water space for agriculture	Xinzhuang	Jiuwangzhuang	Juhe River	IV
23	Water space for industry	Gate	Jiuwangzhuang	Juhe River	IV
24	Water space for agriculture	Jiuwangzhuang	Xin'an Town	Jiyun River	IV
25	Water space for agriculture	Jiangwakou	Lutai Bridge	Jiyun River	IV
26	Water space for industry	Lutai Daida -	Jiyun River	Jiyun River	IV
27	Water space for agriculture	Lutai Bridge	Gate	Jiyun River	IV

# (2) Ambient Air Quality Standard

The project site is located in rural towns, so the secondary concentration limit in Ambient Air Quality Standard (GB3095-2012) shall be implemented.

Pollutants	Value-taking time	Concentration limit	Concentration unit	
Fonutants	v alue-taking time	Level II standard		
	Annual average	60		
Sulfur dioxide (SO2)	24-hour average	150		
	1-hour average	500	u ~/m <sup>3</sup>	
	Annual average		$\mu g/m^3$	
Nitrogen dioxide (NO2)	rogen dioxide (NO2) 24-hour average			
	1-hour average	200		
Carbon monoxide (CO)	24-hour average	4	mg/m <sup>3</sup>	
Carbon monoxide (CO)	1-hour average	10	mg/m <sup>*</sup>	
$O_{7000}(02)$	Daily maximum 8-h average	10		
Ozone (O3)	1-hour average	160	$ua/m^3$	
Particulate matter	Annual average	70	$\mu g/m^3$	
(PM10) 24-hour average		150		

# Ambient Air Quality Standards (GB3095-2012)

Table 1.4-3

(3) Acoustic environmental quality standard

The project site is located in rural towns, and the Class 1 standard in the Acoustic Environmental Quality Standard (GB3096-2008) shall be implemented, and the Class 4a standard in the Acoustic Environmental Quality Standard (GB3096-2008) shall be implemented in the area within 50m outside the boundary lines of roads on both sides of the traffic trunk road. See Table 1.4-4 for the specific towns and subdistricts involved in the Project.

Acoustic Environmental Quality Standard (GB3096-2008)

Table 1.4-4

Unit: dB (A)

Classification of	Time		
Acoustic Environment	Doutimo	Nichttime	Execution Area
Functional Zone	Daytime	Nighttime	
			Sensitive points in the village where the
Class 1	55	45	Project is located and beyond 30m outside
			the boundary line of roads on both sides
			of the traffic trunk road
			Within 30m outside the boundary line of
Class 4a	70	55	roads on both sides of the traffic trunk
			road

1.4.2 Pollutant Emission Standards

\*OFFICIAL USE ONLY

The pollutant emission standards of the Project mainly include sewage and wastewater discharge standards, ambient air emission standards and noise emission standards.

(1) Wastewater (sewage) treatment objectives and discharge standards

No living area is arranged on the construction site. It is planned to rent residential houses outside the station to accommodate workers, so no domestic sewage will be generated on site. The construction area is only provided with an office area, reinforcement processing yard, wood formwork processing plant, and equipment and material stacking area. Among them, the office area relies on the original office building of the Project, including hardware and valuables warehouses, offices, meeting rooms, etc., and the sewage and wastewater are not discharged outside the municipal pipe network. Since there is basically no production wastewater during the construction of distributed PV projects, only a small amount of construction vehicle washing wastewater is generated, and the main pollutant in the wastewater is only a small amount of SS.

Vehicle washing tanks and sedimentation tanks shall be set up in the main construction area of the Project to wash the vehicles entering and leaving the construction site, so as to prevent the vehicles from bringing dust into the social roads. After sedimentation of vehicle washing wastewater, the supernatant shall meet the corresponding standards of The Reuse of Urban Recycling Water—Water Quality Standard for Urban Miscellaneous Use (GB/T 18920-2020) before being reused as construction water or watering for dust suppression. A certain area of the drying site shall be set up in the construction site, and the sediment shall be transported to the designated place for soil covering after drying.

During the operation of the Project, solar panels will be cleaned. Since the composition of cleaning sewage is basically the same as that of rainwater and the number of PV modules installed in each household is definite, a large amount of cleaning wastewater will not be generated. The cleaning wastewater can be treated by

local rainwater ditches.

(2) Ambient air pollution prevention and control objectives and emission standards

The Project is a distributed PV project, which converts solar energy into electric energy. No fossil fuel is involved in the power generation process, and no waste gas pollutants or environmental air pollution is generated.

(3) Noise pollution prevention and control objectives and emission standards

The noise emission in the construction area shall be subject to the noise limit specified in the Emission Standard of Environment Noise for Boundary of Construction Site (GB12523-2011). During the operating period, the operation of PV panels is basically free of noise.

Emission Standard of Environment Noise for Boundary of Construction Site

(GB)	12523-	.201	1)
UD.	12323-	-201	11

Table 1.4-5	Unit: dB (A)
Daytime	Nighttime
70	55

## 1.5 Environmental Protection Objectives and Stakeholders

(1) Surface water environmental protection objects

The surface water environmental protection objective of the Project is the surface water body near the project site. See Table 1.4-1 and Table 1.4-2 for details.

(2) Acoustic environment and ambient air protection objectives

The acoustic environmental protection objectives of the Project are the buildings and building concentration areas that need to be kept quiet in the town and subdistrict areas specifically implemented by the (50MW) distributed PV project in Dashiqiao City of Liaoning Province and the (50MW) distributed PV project in Baodi District of Tianjin.

The ambient air protection objectives of the Project are the residential area, cultural area and rural area where people are concentrated in the town and subdistrict areas specifically implemented by the (50MW) distributed PV project in Dashiqiao City of Liaoning Province and the (50MW) distributed PV project in Baodi District of

Tianjin, totalling 27. See Table 1.5-1 for details.

Acoustic Environment and Ambient Air Protection Objectives

Tab	le	1.5-	1

Project location	Name of towns and subdistricts	Functional Zoning
	Jinqiao Subdistrict	
	Gangdu Subdistrict	
	Baizhai Subdistrict	
-	Meidu Subdistrict	
	Shuiyuan Town	
	Gouyan Town	
	Shifo Town	Acoustic Environmental Quality
Dashiqiao City,	Gaokan Town	Standard
Liaoning	Qikou Town	(GB3096-2008) Class 1 and
Province	Huzhuang Town	Class 4a; Class II standard in
	Guantun Town	<ul> <li>Ambient Air Quality Standard</li> <li>(GB3095-2012).</li> </ul>
	Boluopu Town	(0B3093-2012).
	Yongan Town	
	Tangchi Town	
	Jianyi Town	
	Huangtuling Town	
	Zhoujia Town	
	Chaoyang Subdistrict	
	Wangbuzhuang Town	
	Fangjiazhuang Town	Acoustic Environmental Quality
	Xin'an Town	Standard
Baodi District, Tianjin	Huogezhuang Town	(GB3096-2008) Class 1 and
	Xinkaikou Town	Class 4a; Class II standard in
	Niudaokou Town	Ambient Air Quality Standard
Γ	Shigezhuang Town	(GB3095-2012).
Γ	Haogezhuang Town	
Γ	Niujiapai Town	

(4) Surrounding stakeholders of the Project

The stakeholders of the Project can be roughly divided into five groups: governments at all levels and relevant institutions in the project area, project implementation institutions and construction units, various groups served by the Project, households providing roof rental for the Project and groups affected by construction. The specific stakeholders are shown in the following table.

Stakeholder groups	Specific stakeholders		
Relevant government agencies of the Project	Baodi District and Dashiqiao Municipal Bureau of Planning and Resource Management, Baodi District and Dashiqiao Municipal Housing and Urban-Rural Development Bureau, Baodi District and Dashiqiao Municipal Ecological Environment Bureau as the planning and environmental management units of the Project		
Project implementation institutions and construction contractor	Beijing Xiangju New Energy Technology Co., Ltd., Yingkou and Dashiqiao Project Company, Yingkou and Dashiqiao Construction Contractor		
Groups served by the Project	erved by the Project SPIC Northeast Electric Power Co., Ltd. Benxi Thermal Power Branch		
Households providing roof rental for the Project Groups affected by construction	About 4,209 farmer households in Baodi District and about 2,500 farmer households in Dashiqiao City plan to rent roofs and courtyards.		

# Identification of Stakeholder

Table 1.5-2

According to the site survey, the preliminarily selected site of the Dashiqiao 50MW Distributed PV Project includes 17 towns and subdistricts in Dashiqiao City, Liaoning Province, namely Jinqiao Subdistrict, Gangdu Subdistrict, Baizhai Subdistrict, Meidu Subdistrict, Shuiyuan Town, Gouyan Town, Shifo Town, Gaokan Town, Qikou Town, Huzhuang Town, Guantun Town, Boluopu Town, Yong'an Town, Tangchi Town, Jianyi Town, Huangtuling Town, and Zhoujia Town; the preliminarily selected site of Tianjin Baodi 50MW Distributed PV Project includes 10 towns and subdistricts in Baodi District, Tianjin, namely Chaoyang Subdistrict, Wangbuzhuang Town, Niudaokou Town, Shigezhuang Town, Haogezhuang Town, and Niujiapai Town.

FARMERS AFFECTED BY THE PROJECT	CT
---------------------------------	----

Table 1.5-3
-------------

Project	S/N	Township and subdistrict	The Project's closest proximity	Impact factors
Baodi	1	Chaoyang Subdistrict		Environmental
50MW	2	Wangbuzhuang Town	The Project will rent the	impacts such as
Distributed	3	Fangjiazhuang Town	roof of farmers, which can be directly used.	dust and noise
PV Project	4	Xin'an Town		during the

Project	S/N	Township and subdistrict	The Project's closest proximity	Impact factors
in Tianjin	5	Huogezhuang Town		construction
	6	Xinkaikou Town		period; roof
	7	Niudaokou Town		occupation during
	8	Shigezhuang Town		the operation
	9	Haogezhuang Town		period, which has
	10	Niujiapai Town		a certain impact on
	1	Jinqiao Subdistrict		house repair.
	2	Gangdu Subdistrict	The Project will rent the roof or courtyard of farmers, which can be directly used.	
	3	Baizhai Subdistrict		
	4	Meidu Subdistrict		
	5	Shuiyuan Town		
	6	Gouyan Town		
Deshisisa	7	Shifo Town		
Dashiqiao 50MW	8	Gaokan Town		
Distributed	9	Qikou Town		
	10	Huzhuang Town		
PV Project	11	Guantun Town		
	12	Boluopu Town		
	13	Yongan Town		
	14	Tangchi Town		
	15	Jianyi Town		
	16	Huangtuling Town		
	17	Zhoujia Town		



# 

Dalanggezhuang Village, Chaoyang

Shishihu Village, Haogezhuang Town

Chenjiakou Village, Huogezhuang Town

Zhaijiashen Village, Niudaokou Town



Liujiakou Village, Xinkaikou Town

Figure 1.5-2 Aerial Photograph of Farmhouses Involved in Baodi 50MW Distributed

PV Project in Tianjin



Wangmatai Village, Boluopu Town



Yaotun Village, Qikou Town







Huzhuang Village, Huzhuang Town



Tangchi Village, Tangchi Town





Woniushi Village, Tangchi Town



Huizhuang Village, Yong'an Town



Xitianjiatun Village, Yong'an Town Figure 1.5-3 Aerial Photograph of Farmhouses Involved in the Dashiqiao 50MW Distributed PV Project in Yingkou

# 2 Project Overview

# 2.1 Project sponsor's Information

The sponsor of the Project is Beijing Xiangju New Energy Technology Co., Ltd. under CHONGHO BRIDGE.

CHONGHO BRIDGE is a comprehensive service organization specialized in serving rural small and micro-clients. It is composed of Chongho Bridge Management Limited and its small and micro-financial institutions and rural service enterprises. CHONGHO BRIDGE is committed to helping low- and middle-income groups and small and micro-enterprises in rural areas to develop production, improve their lives, and integrate into the process of agricultural and rural modernization by providing a variety of services such as credit, production, living and public welfare, thus narrowing the gap between urban and rural, rich and poor, gender and digital development, and helping rural revitalization and common prosperity. Up to now, CHONGHO BRIDGE has covered more than 430 counties/cities in 20 provinces in China, with more than 6000 employees, more than 100,000 part-time village-level station managers, over 1.2 million clients served throughout the year, and more than tens of millions of clients accumulated.

Beijing Xiangju New Energy Technology Co., Ltd. is based in the county, coordinates resources, and provides full-process distributed PV integrated services such as development, survey, design, installation, operation and maintenance, and asset management for partners who have the ability to support household assets. The main business lines of Beijing Xiangju New Energy Technology Co., Ltd. include:

(1) Become the optimal cooperation channel (PV+) for state-owned enterprises/central enterprises to implement the rural revitalization strategy. Become a landing service provider for rural distributed PV, PV "county-wide promotion" and clean energy station operation, focusing on the scale of PV household use. In three years, the household scale will be over 200,000, the installed capacity will reach more than 3GW, and the total investment scale will exceed RMB10 billion.

(2) Alliance of financial empowerment service providers (finance+) based on rural assistance platform. Capital turnover services for the procurement of county and township installers (HVAC/PV, etc.) that have obtained subcontract service orders; large-scale installment service for end-users; with brand parties or distributors settled on the "township assistance" platform to put relevant goods on shelves, national or regional customer managers will receive commissions for sales, and distribution can support regional protection.

# 2.2 Geographical Location

The Project includes Dashiqiao 50MW Distributed PV Project and Baodi 50MW Distributed PV Project in Tianjin.

The preliminarily selected site of the Dashiqiao 50MW distributed PV project includes 17 towns and subdistricts in Dashiqiao City, Liaoning Province, namely Jinqiao Subdistrict, Gangdu Subdistrict, Baizhai Subdistrict, Meidu Subdistrict, Shuiyuan Town, Gouyan Town, Shifo Town, Gaokan Town, Qikou Town, Huzhuang Town, Guantun Town, Boluopu Town, Yong'an Town, Tangchi Town, Jianyi Town, Huangtuling Town, and Zhoujia Town.

The preliminarily selected site of Baodi 50MW Distributed PV Project in Tianjin includes 10 towns and subdistricts in Baodi District, Tianjin, namely Chaoyang Subdistrict, Wangbuzhuang Town, Fangjiazhuang Town, Xin'an Town, Huogezhuang Town, Xinkaikou Town, Niudaokou Town, Shigezhuang Town, Haogezhuang Town, and Niujiapai Town.

# 2.3 Necessity of Project Construction

#### (1) Renewable energy development

China is one of the largest coal producers and consumers in the world, and also one of the few countries with coal as the main energy source. In energy production and consumption, coal accounts for about 70% of commodity energy consumption, and has become the main source of air pollution in China. Therefore, vigorously developing new and renewable energy technologies such as solar energy, wind energy, biomass energy, geothermal energy and ocean energy will become one of the important measures to reduce environmental pollution.

In recent years, international PV power generation has developed rapidly. PV power generation has transitioned from supplementary energy to alternative energy and is developing towards grid-connected power generation. China has also introduced a series of policy measures to encourage and support the development of solar PV power generation industry, such as Regulations on the Administration of Renewable Energy Power Generation, Trial Measures on the Administration of the Price and Cost Allocation of Renewable Energy Power Generation, Interim Measures on the Allocation of Additional Revenue from Renewable Energy Electricity Price, Measures on the Administration of Special Funds for Renewable Energy Development, Notice on the Requirements for the Construction of Large-scale Grid-connected PV Demonstration Stations, Notice on the Implementation of Golden Solar Demonstration Projects, etc. Support was given in terms of policies, investment, finance and taxation, and electricity prices, and the prices of PV modules and grid-connected inverters continued to fall. A large number of 100-MW PV power stations (PVPSs) have been put into operation throughout the country and a large number of experiences in manufacturing, construction and installation, operation and maintenance have been accumulated. Therefore, PV power generation is one of the renewable energy power generation modes with the most mature technology, the most large-scale development conditions, and commercial development prospects.

The development of new energy is an important part of China's energy development strategy. As a large storage area of primary energy and clean energy, Tianjin and Yingkou, while developing primary energy in an orderly and step-by-step manner, actively developing and utilizing clean renewable energy, will have special significance for improving the local micro-ecological environment.

Therefore, the construction of the Project is very necessary and can play an

exemplary role.

# (2) Rational utilization of energy resources

In accordance with the spirit of the Notice of the State Council on Issuing the Comprehensive Work Plan for Energy Conservation and Emission Reduction (GF [2007] No.15) and the Notice of the Ministry of Finance and the Ministry of Construction on Issuing the Interim Measures for the Administration of Special Funds for Renewable Energy Building Applications (CJ [2006] No.460), the central financial department arranges part of the funds from the special funds for renewable energy to support the demonstration and promotion of solar PV applications in urban and rural buildings.

In order to promote the development of China's renewable energy industry, in accordance with the requirements of the Renewable Energy Law of the People's Republic of China, the National Development and Reform Commission issued the Guiding Catalogue for the Development of Renewable Energy Industry in November 2005, covering 88 renewable energy development and utilization and system equipment manufacturing projects in six fields, including wind energy, solar energy, biomass energy, geothermal energy, ocean energy and hydro energy. For the projects with large-scale promotion and utilization in the Catalogue, relevant departments of the State Council will formulate and improve preferential policies on technology research and development, project demonstration, fiscal taxation, product price, market sales, and import and export.

In order to promote the progress of energy conservation technology, improve energy utilization efficiency, promote energy conservation and optimize energy consumption structure, and build a resource-conserving and environmental-friendly society, the National Development and Reform Commission and the Ministry of Science and Technology issued a new Outline of China's Energy Conservation Technology Policy in December 2006, emphasizing that renewable energy (including non-fossil energy such as wind energy, solar energy, hydro energy, biomass energy,

\*OFFICIAL USE ONLY

geothermal energy, and ocean energy) is an important energy resource in China, and plays an important role in meeting energy demand, improving energy structure, and building a resource-saving and environment-friendly society. The Outline of China's Energy Conservation Technology Policy proposes that in terms of solar energy technology, the production technology of solar PV silicon materials, solar PV power generation technology and solar thermal utilization technology shall be researched and developed; in terms of new energy-saving materials, we will develop new efficient energy conversion and energy storage devices and materials, and promote the application and development of fuel cells, solar cells, metal air batteries, supercapacitors and related materials.

According to the Notice of the National Energy Administration on Further Implementing Relevant Policies on Distributed PV Power Generation (GNXN [2014] No.406), various forms of distributed PV power generation applications are encouraged. It is necessary to make full use of the resources of qualified building roofs (including ancillary vacant sites), and encourage development zones and large industrial and commercial enterprises with large roof areas, large power loads and high power grid prices to take the lead in PV power generation applications. Local governments at all levels are encouraged to formulate supporting financial subsidy policies on the basis of state subsidies, and appropriately increase support for public institutions, affordable housing and rural areas. It is encouraged to promote PV power generation in the public facility systems such as railway stations (including high-speed railway stations), expressway service areas, airport terminals, large-scale comprehensive transportation hub buildings, large-scale stadiums and parking lots, and take PV power generation application as an important element in the planning and design of relevant buildings and other facilities, and encourage large enterprise groups to uniformly organize and construct distributed PV power generation projects for their subordinate enterprises. Distributed PVPSs for local consumption are constructed by utilizing abandoned land, barren hills and slopes, agricultural greenhouses, tidal flats, fish ponds and lakes

according to local conditions. It is encouraged to combine distributed PV power generation with poverty alleviation for rural households, new rural construction, and agricultural facilities to promote the improvement of rural residents' lives and agricultural and rural development. For various distributed PV power generation projects mainly for self-generation and self-consumption, when limited by the construction scale indicator, the provincial energy department shall timely coordinate and solve or apply to the National Energy Administration for additional scale indicators.

The demand for a new installed capacity of PV power generation in the 14th Five-Year Plan will be much higher than that in the 13th Five-Year Plan. The application scenarios will be continuously expanded, the business model will be innovated, and the supporting policies for the photovoltaic industry will be continuously improved. On December 12, 2020, Xi Jinping, President of the People's Republic of China, delivered an important speech entitled Continuing the Past and Starting a New Journey to Global Climate Change at the Climate Ambition Summit, further announcing that by 2030, China will lower CO<sub>2</sub> emissions per unit GDP by 65% from 2005 levels, increase the share of non-fossil fuels in primary energy consumption to around 25%, increase forest stock by 6 billion m<sup>3</sup> above 2005 levels and bring the total installed capacity of wind and solar power to over 1,200GW.

Baodi District is dominated by a warm temperate semi-humid continental monsoon climate. It has four distinctive seasons, short spring and autumn, long summer and winter, annual average temperature of 11.6°C, annual precipitation of 612.5 mm, and annual frost-free period of about 184 days on average. The annual total solar radiation value ranges from 4200 MJ/m<sup>2</sup> to 5400 MJ/m<sup>2</sup> in all parts of Tianjin, and the annual total solar radiation in most parts of Tianjin is more than 4500 MJ/m<sup>2</sup>, which is rich in solar energy resources and suitable for the construction of PVPSs. Dashiqiao City is dominated by a warm temperate semi-humid continental monsoon climate. There are four distinct seasons in the year, namely, short spring and autumn, long summer and winter, annual average temperature of 8°C-9°C, annual precipitation of

640-750mm, and frost-free period of about 175 days over the years. The area where the proposed site is located has sufficient sunshine and the average annual total radiation is 5172.3MJ/m2. Its solar energy resources belong to Class B "rich in resources" area, which is suitable for the construction of large-scale PVPSs.

Baodi District of Tianjin City and Dashiqiao City of Liaoning Province have excellent conditions for the development of solar energy resources. The active development of solar energy resources and the use of renewable energy for power generation can improve the power supply structure of the region, and replace some power generation equipment with high energy consumption and high pollution. While improving the environmental quality, it can also increase employment opportunities for local residents, drive the development of relevant industries and meet the power demand of residents, bringing good social and environmental benefits.

Therefore, the Project conforms to the national policy of encouraging the development of PV industry and supporting the energy industry policy of PV power generation and grid connection.

### (3) Energy conservation and emission reduction to improve ecology

Protecting and improving the environment on which human beings depend and realizing sustainable development are the common wishes of people all over the world. Our government has made sustainable development a basic strategy for economic and social development and has taken a number of major initiatives. The reasonable development and economical use of natural resources, improvement of resource utilization mode, adjustment of resource structure allocation and improvement of resource utilization rate are all effective ways to improve the ecology and protect the environment.

Solar energy is clean and renewable energy. The development of solar energy in line with national policies on environmental protection and energy-saving, the development and construction of PVPSs can effectively reduce the consumption of conventional energy, especially coal resources, protect the ecological environment and

create tourist attractions with beautiful mountain and river.

The Clean Development Mechanism (CDM) is one of the three flexible mechanisms under the Kyoto Protocol, i.e. the project-based cooperation mechanism between developed countries and developing countries in the United Nations Framework Convention on Climate Change (UNFCCC).

China is one of the developers with great greenhouse gas emission reduction potential. It has a good investment environment and a broad market prospect for CDM cooperation. The power industry, especially the PV power generation industry, is a key area of CDM projects. The development of CDM projects in the PV power generation field has great potential and advantages.

If the Project can be successfully registered as a CDM project, the investment and technical obstacles faced by the Project can be overcome to a certain extent, which will bring great benefits to the Project. Therefore, it is recommended that the Sponsor of the Project entrust the Consultant to apply for CDM project in time to maximize the CDM revenue.

### (4) Contribution to social and economic development

The proposed project can effectively utilize local solar energy resources. While generating clean energy, it can also increase employment opportunities for local residents and drive the development of relevant industries. The local government is very supportive of the construction of solar PVPSs. Through the introduction of projects, the local government will inject funds into the local economy, improve the level of fixed assets investment, and establish good cooperative relations with large national enterprises and internationally renowned enterprises, laying a solid foundation for follow-up investment attraction, which can also improve the regional status and establish a good regional image.

The proposed project adopts renewable energy for power generation, which will not have an adverse impact on the environment and ecology, but also replaces some power generation equipment with high energy consumption and high pollution,

improves environmental quality and has positive externalities for local residents. At the same time, it can also increase employment opportunities for local residents, drive the development of relevant industries and meet the electricity demand of residents. Therefore, the residents also have a positive attitude towards the proposed project.

## 2.4 Project Task and Scale

### 2.4.1 Project tasks

The main task of the project construction is to build distributed PV projects, promote the development of new energy industries, improve the income level of farmers, and contribute to the construction of new rural areas.

#### 2.4.2 Project scale

Dashiqiao 50MW Distributed PV Power Generation Project is a household PVPS, and the mode of "full feed-in grid" is adopted. Each household is equipped with 30~90 pieces of 540Wp monocrystalline silicon solar modules. The actual installed capacity is determined according to the actual installable area of the leased farmers, usually 15~50kWp. One PV inverter is configured according to the actual installed capacity, and the outgoing line is connected to the combined LV distribution box. According to the total installed capacity, the irradiation quantity of inclined surface, the system efficiency and the nominal efficiency attenuation of PV modules, etc., it is calculated that the average annual energy output of the PVPS is 65,898,000 kWh, the average annual utilization hours are 1,329h, and the total energy output in 25 years is 1,647,438,800 kWh.


The 50MW Distributed PV Power Generation Project in Baodi District is a household PVPS, and the mode of "full feed-in grid" is adopted. Each household is equipped with 22 pieces of 540Wp monocrystalline silicon solar modules, with an actual installed capacity of 11.88kWp. One 10kW PV inverter is installed, and the outgoing line is connected to the residential LV distribution box. According to the total installed capacity, the irradiation quantity of inclined surface, the system efficiency and the nominal efficiency attenuation of PV modules, etc., it is calculated that the average

annual energy output of the PVPS is 68,087,800 kWh, the average annual utilization hours are 1,361.68h, and the total energy output of 25 years is 1,702,195,000 kWh.

2.5 Project Composition

The PV power generation system constructed by the Project adopts the full feedin grid mode.

The schematic diagram of grid-connected PV power generation in the project is as follows:

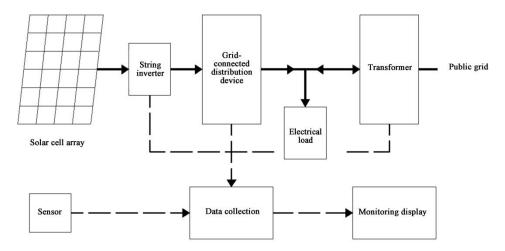



The main components of the Project include PV modules, inverters, PV brackets, environmental monitors and secondary electrical access cables.

### (1) PV modules

The PV power generation system connects a large number of PV modules with the same specifications and characteristics in series through a number of solar modules to reach the rated input voltage of the inverter, and then connects such cell panels in parallel to reach the predetermined rated power of the system. These devices are numerous. In order to avoid mutual shielding between them, they must be arranged at a certain spacing to form an array, which is called PV power generation array. A circuit consisting of several PV modules of the same specification and characteristics connected in series is a basic array unit. Each PV power generation array consists of a solar module, inverter and step-up power distribution room with a predetermined power.

Several PV arrays form a PVPS through the connection of electrical systems. The selection of appropriate PV modules has a great impact on the investment, operation and benefit of the whole power station.

At present, the highest laboratory efficiency of solar cells in the world is: 24% (4cm<sup>2</sup>) for monocrystalline silicon cells, 18.6% (4cm<sup>2</sup>) for polycrystalline silicon cells, 30.28% (AM1) for InGaP/GaAs double junction cells, 14.5% (initial), 12.8% (stable) for amorphous silicon cells, 15.8% for cadmium telluride cells, 14.6% for silicon ribbon cells, and 10.96% for TiO<sub>2</sub> nanocrystalline organic solar cells. Crystalline silicon solar cells are proposed for the Project.

Considering various factors such as module efficiency, technical maturity, market share, module production capacity, project construction period, manufacturer's supply capacity, etc., solar modules with large unit area power shall be preferred to reduce floor area, save cable and reduce module installation. Based on the current industrial status and production capacity of the domestic PV module market, the mainstream and leading crystalline silicon PV modules in the market are selected for comparison. Through preliminary investigation, the module efficiency of each manufacturer reaches the full mark, mainly including monocrystalline modules. Therefore, the single crystal module is recommended in this technical scheme.

Considering the module efficiency, technical maturity, market share and the available options when purchasing and ordering, it is proposed to select the high-efficiency monocrystalline silicon 540Wp module for the Project, with a module efficiency of 20.4%.

PERFORMANCE PARAMETER TABLE OF PV MODULE

Table 2.5-1

Parameters	Value
Maximum output power Pmax(W)	540
Open-circuit voltage Voc(V)	49.5
Short-circuit current Isc(A)	13.85
Working voltage Vmppt(V)	41.65
Working current Imppt(A)	12.97
Conversion efficiency of modules	20.71

Peak power temperature coefficient (%/°C)	0.35
Open circuit voltage temperature coefficient	0.204
(%/°C)	
Short circuit current temperature coefficient	0.05
(%/°C)	
Output power tolerance (W)	0 - +5
Operating temperature (°C)	-40~+85
Outline dimensions $(L \times W \times H)$ (mm)	2256×1133×35

Note: The nominal power of the above modules under standard test conditions (STC): 1000W/m2, solar battery temperature 25°C, AM1.5.

# (2) Inverter

The Project adopts string inverter. Compared with centralized inverter, it has a series of advantages such as no increase in system investment, higher investment income and availability.

Product model	SG8.0RT-20	SG10RT-20	SG12RT-20	SCISRT-20	SGI7RT-20	SG20RT-20
Input (DC)			5			
Maximum input voltage			1100V			
Start-up voltage			180V			
Rated input voltage			600V			
MMPT voltage range			160V~1000V			
Full-load MPPT voltage range	330V~850V	430V~850V	510V~850V	430V~850V	365V~850V	430V~850V
Quantity of MPPT			2			
MPPT voltage range per channel	1/1	1/1	1/1	2/1	2/2	2/2
Maximum input current	25A (12.5A/12.5A)	25A (12.5A/12.5A)	25A (12.5A/12.5A)	37.5A (25A/1 2.5A)		50A (25A/25A)
Maximum allowable current of input terminal			16A			
Maximum DC short-circuit current	32A ( 16A/16A )	32A (16A/16A)	32A (16A/16A)	48A (32A/16A)	64A (32A/32A)	64A (32A/32A)
Output (AC)			Stort ( toration)			
Rated output power	8000W	10000W	12000W	15000W	17000W	20000W
Maximum output apparent power	8800VA	11000VA	13200VA	16500VA	18700VA	22000VA
Maximum output current	13.3A	16.7A	204	25A	28.3A	31.9A
Rated grid voltage	T WINES	TWO IS	3 / N / PE, 400V	6.67	E.M.S.	with the
Grid voltage range			270V~480V			
Rated grid frequency			50Hz			
Range of grid frequency			45~55Hz			
Fotal harmonic distortion			<3 % [Rated power]			
			<0.5 % In			
DC component		- 0 00 G 6 II		1.1.001)		
Power factor		> 0.99 @ niii ]	power (adjustable range 0.8	(lead ~ 0.8 lag)		
Efficiency	0.0.00		98.5%		0.0.001	0.0.001
Maximum efficiency	98.5%	98.5%	98.1%	98.6% 98.1%	98.6% 98.2%	98.6% 98.2%
Efficiency in Europe	98.0%	98.1%	90.176	90.1%	95.276	90.276
Protection						
Islanding protection			Available			
AC short circuit protection			Available			
Leakage current protection			Available			
DC switch			Optional			
Overvoltage class			e III [grid side], Grade II [P			
Surge protection		DC secondary lightning	protection and AC second	ary lightning protection		
General parameters						
Dimension (width × height × thickness)		31	70mm × 480mm × 195	mm		
installation method			Backplane wall-mounted			
Weight	17kg	17kg	17kg	17kg	20kg	20kg
isolation mode			Without transformer			
Protection grade			IP65			
Self-consuming at night			<1W			
Femperature			-25°C~+60°C			
Humidity			0%~100%			
Cooling mode	Natural cooling	Natural cooling	Natural cooling	Air cooling	Air cooling	Air cooling
Altitude		40001	n {> 2000m frequency red	action)		
Display			LED			
Communication			GPRS			
Type of DC side terminal			MC4			
Type of AC side terminal			OT/DT terminal			

Figure 2.5-2 Main Nominal Parameters of String Inverters


### (3) Electrical access

In the distributed PV project in Baodi District, each household is equipped with 22 modules on the red brick and tile roof, one 10kW string inverter, and each inverter is connected to two strings, totaling 11.88kW. A total of 92,598 modules are arranged in the Distributed PV Project in Baodi District, with a total installed capacity of 50.00292MWp on the DC side, which is connected to each household's LV distribution cabinet after inverter inversion.

The existing 10kV transformers in the villages and towns in the Dashiqiao area have a capacity of more than 600,000kVA, which fully meets the access conditions of

the Project. A total of 92,594 modules are arranged in the distributed PV project in Dashiqiao City, with a total installed capacity of 50.0008MWp on the DC side, which is connected to the combiner LV grid-connected distribution cabinet after inverter inversion.

It is preliminarily considered to connect the 380V grid to the lower end of the original LV distribution cabinet of each household, and connect the generated energy to the public grid along the original power line. No new transmission line is required for the Project. The PV DC cable of the Project is proposed to be PV1-F DC 1kV 1x4mm<sup>2</sup> special cable. The DC cable is laid under the array, exposed outside the array and led up to the inverter through PE pipes. ZRC YJV22 0.6/1kV 3x6mm<sup>2</sup> AC power cable is proposed to be used from the inverter to the LV distribution box.

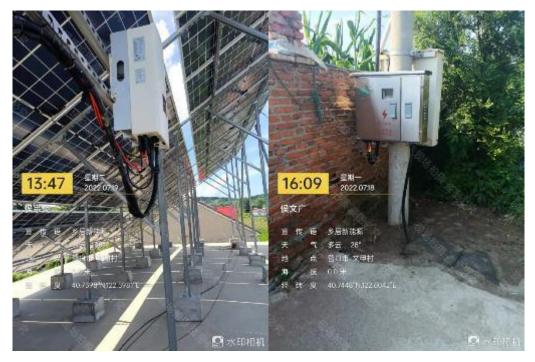

(a) Inverter

(b) LV power distribution cabinet

Figure 2.5-3 Photo of Electrical Access Site

# 2.6 Roof Resources Required for Project Construction and Acquisition Methods

The Project does not involve land acquisition for engineering construction, rents the roof or courtyard of farmers and installs household PVPSs thereon by signing the Letter of Cooperation Intent for Household PV Project or the Agreement on Intent for PV Rental Roof with farmers, and reaches an agreement on the income mode. The number of rented farm households of Baodi PV Project is about 4,209, and the number of rented users of Dashiqiao PV Project is about 2,500. The lease contract of the Project is signed with rural housing owners or their immediate family members.

The Project is a distributed PV project, and the PV construction site is the roof or courtyard of farmhouses, which does not involve resettlement.

115-233世年18年 現前生活: 15220120313	7、平等、工制的长期,宽力就及对50档 SEE着服务,基于责任、风险以及采酬一	户用光伏项目合作意向书 甲方: <u>4</u> %;(4%)证号:,2%;(2%);(2%);(2%);(2%);(2%);(2%);(2%);(2				
开始月 有效据/月 银法以外发生	The second s	履顶可利用面积为17 平米,预估可安装 540W 及以上组				
	3.76]元 H * [66]元 .5]元 H * [30]元					
二、乙方牧業 1、牧前採集与結算。申約收益(依括但不 招展中方农益后作为乙方提供除合组厚管理集) 三、合同解除 室分产条支效性。中方无任何发产及紧会集) 方面测量行数率。方用相先行或手续、有防服44 完全要正见力未实有处制法依地生产品们、乙) 法者任。	各約收益,收益按月估算。 4、乙方流乙方指定約第三方に普通51甲 再及配基产品,因此甲方特约未清;半合	<ul> <li>件 , 实际安装组件以项目实监阶段的具体安装方案 为准,乙方承诺在项目安装并网后,甲方的收益不低于_40 元/块/年_。</li> <li>3、甲方应提供身份证、户口本及房产证明,项目立项成功后, 双方签订正式合作协议。</li> <li>4、若项目在实施过程中遇国家宏观政策的调整,改变或其他 不可控因素使本协议无法实施,则由甲乙双方协策解决。</li> </ul>				

Figure 2.6-1 Cooperation Agreement with Some Intended Farmer Households

# 2.7 Construction Organization Design

## 2.7.1 Construction Conditions

Dashiqiao City is located in the south of Liaodong Peninsula, northeast of Yingkou City, on the left bank of the lower reaches of Liao River, with a total area of 1,610 km<sup>2</sup>. Dashiqiao City is adjacent to Laobian District in the west, to Dawa District of Panjin City in the northwest across the river, to Gaizhou City in the south, and to Haicheng City in Anshan and Xiuyan Manchu Autonomous County in the east. The geographic

**\*OFFICIAL USE ONLY** 

coordinates are between longitude  $122^{\circ}07'$  and  $122^{\circ}59'E$  and latitude  $40^{\circ}18'$  and  $40^{\circ}56'N$ .

Baodi District is located in the north of Tianjin City, adjacent to Yutian County of Hebei Province and Ninghe District of Tianjin City in the east and southeast; borders Ninghe District and Wuqing District in the south and southwest; connects Xianghe County and Sanhe City of Langfang City of Hebei Province in the west and northwest; faces Jizhou District of Tianjin City and Yutian County of Tangshan City of Hebei Province across the river in the north and northeast. Baodi District covers a total area of 1,450 km<sup>2</sup>, with a length of 65km from north to south and a width of 24km from east to west, ranging from 117°8'~117°40'E to 39°21'~39°50'N.

The construction site of the Project is all villages and towns, and the transportation of materials and equipment can rely on the existing roads in villages and towns. The equipment and materials are mainly transported by car and road, among which PV modules are mainly transported by container trucks and electrical equipment are transported by medium-sized trucks.

Because the construction area is scattered, the construction water consumption is not large. The construction water of PV panel bracket foundation is connected with the water of the municipal water supply network nearby. The main electromechanical equipment in site construction includes the electric welding machine, electric cutting saw, electric drill, etc. The electric welding machine has the largest power consumption. The layout of the circuit shall take the layout of the electric welding machine as the main consideration, and the total power load is about 200kW.

### 2.7.2 General Layout of Construction

The construction facilities of Dashiqiao Distributed PV Project and Baodi Distributed PV Project include the office area, living area, reinforcement processing yard, wood formwork processing yard, equipment and material stacking yard, etc. The office area is equipped with hardware and valuables warehouses, offices, meeting rooms, etc. The layout of the office area is subject to the arrangement of the General

Contractor. No living area will be arranged on site, and all workers employed will be local workers, so no accommodation facilities are required. The estimated area of the reinforcement processing yard of Dashiqiao Distributed PV Project and Baodi Distributed PV Project is about 200m2, the estimated area of the wood formwork processing yard is about 150m2, and the estimated area of the equipment and material stacking yard is about 500m2.

### 2.7.3 Construction of Main Works

There is basically no installation and lifting of large pieces in the Project. The PV module mounting bracket shall be supplied in bulk. It shall be assembled into modules on the construction site, and then lifted and installed in place one by one. Before installation, PV modules with relatively similar performance shall be installed in strings according to the performance parameters calibrated before delivery of PV modules, so as to ensure that PV modules operate under the best operating parameters as far as possible. The size and height of PV modules shall be controlled according to the site conditions.

### 2.7.4 Construction Progress and Workers

The Project is constructed on the existing roof and in the courtyard, with a short construction period of about 6 months.

The workers of the Project are all local people, and the main recruitment methods include online recruitment, recruitment by the Labor and Employment Bureau and recruitment in the talent market. The average number of site construction personnel in Dashiqiao City and Baodi District is 20, and the number of site construction personnel in peak period is 50. The workers will receive professional training before construction to ensure HSE-compliant construction and avoid conflicts and disputes. The average number of site operation and maintenance personnel during the operation period is about 6.

PRELIMINARY SCHEDULE OF PROJECT IMPLEMENTATION Table 2.7-1

Schedule		Co	nstruction p	eriod (mont	hs)	
Item	1	2	3	4	5	6
Feasibility study and						
review						
Grid connection						
procedure						
Tender for main	_					
equipment						
Preliminary design, and						
construction drawing						
design						
Procurement of						
equipment and materials						
Civil works			_			
Electrical installation						
Equipment						
commissioning and						
completion acceptance						

# 2.8 Project Investment Estimate

(1) Dashiqiao 50MW Distributed PV Project

The Project is a PV power generation project with a planned installed capacity of 50MW, a total cost of about RMB 350.6779 million and a dynamic investment per kilowatt of about RMB 3969.79/kW.

After the completion of the Project, the average annual on-grid energy is 65.898 million kWh (the operation period is calculated as 25 years), and the net profit is about RMB 195.8565 million. The design estimate of the Project is prepared according to this scale.

# ECONOMIC INDICATORS OF DASHIQIAO PROJECT (GRID CONNECTION OF INDUSTRIAL AND COMMERCIAL MODE)

## Table 2.8-1

S/N	Content of economic	Unit	Economic indicators
	indicators		
1	Installed capacity	Megawatt	50
2	Utilization hours in the	Hours	1431

	first year		
3	Total dynamic investment	RMB 10,000	19698.95
	(Not Including current		
	capital)		
4	Interests incurred during	RMB 10,000	198.95
	construction		
5	Current capital	RMB 10,000	150
6	Rent	RMB/W	0.074
7	Operation and	RMB/W	0.03
	Maintenance		
8	Static Investment per	Yuan/kilowatt	3900
	Kilowatt		
9	Dynamic investment per	Yuan/kilowatt	3969.79
	kilowatt		
10	Electricity price (including	RMB/kwh	0.3749
	taxes)		
11	Total cost	RMB 10,000	35067.79
12	Net profit	RMB 10,000	19585.65
13	IRR (all investments	%	9.63%
	before tax)		
14	IRR (all investments after	%	7.62%
	tax)		
15	IRR (capital after tax)	%	13.59%
16	Investment repayment	Year	9.65
	period (before tax)		
17	Investment recovery	Year	11.08
	period (after tax)		

The financial assessment report indicates that the project is financially feasible and economically beneficial, and can promote local economic development. Therefore, it also has significant social benefits.

(2) Baodi 50MW Distributed PV Project

The Project is a PV power generation project with a planned installed capacity of 50MW, a total cost of about RMB 419.38 million and a dynamic investment per kilowatt of about RMB 4018/kW.

After the completion of the Project, the average annual on-grid energy is 68.0878 million kWh (the operation period is calculated as 25 years), and the net profit is about RMB 95,180,000. The design estimate of the Project is prepared according to this scale.

# ECONOMIC INDICATORS OF BAODI DISTRICT PROJECT (GRID

# CONNECTION OF INDUSTRIAL AND COMMERCIAL MODE)

Table	2.8-2
-------	-------

S/N	Content of economic indicators	Unit	Economic indicators	Remarks
1	Installed capacity	Megawatt	50.00292	
2	Utilization hours in the first year	Hours	1460	
	Total static investment	RMB 10,000	19752	
3	Total dynamic investment	RMB 10,000	20093	
4	Static Investment per Kilowatt	Yuan/kilowatt	3950	
5	Dynamic investment per kilowatt	Yuan/kilowatt	4018	
6	Interests incurred during construction	RMB 10,000	341	
7	Current capital	RMB 10,000	150	
8	Project rent	RMB/pcs.	40	Total 92,589 modules
9	Electricity price (before tax)	RMB/kwh	0.3655	
10	Total cost	RMB 10,000	41938	25-year operation period
11	Net profit	RMB 10,000	9518	25-year operation period
12	IRR (all investments before tax)	%	6.81%	
13	IRR (all investments after tax)	%	6.00%	
14	IRR (capital after tax)	%	9.01%	
15	Investment repayment period (before tax)	Year	12.27	
16	Investment recovery period (after tax)	Year	12.89	

The financial assessment report indicates that the project is financially feasible and economically beneficial, and can promote local economic development. Therefore, it also has significant social benefits.

# 3. Environmental and Social Profile

## 3.1 Natural Environment

### 3.1.1 Meteorology

(1) Meteorology of Baodi District

Baodi District is dominated by a warm temperate semi-humid continental monsoon climate. It has four distinctive seasons, short spring and autumn, long summer and winter, annual average temperature of 11.6°C, annual precipitation of 612.5 mm, and annual frost-free period of about 184 days on average.

(2) Meteorology of Dashiqiao City

Dashiqiao city is dominated by a warm temperate semi-humid continental monsoon climate. The whole year is characterized by sufficient sunlight, distinct seasons, synchronous rain and heat, concentrated rainfall, annual average temperature of 8°C-9°C, annual average rainfall of 640-750mm, and frost-free period of about 175 days.

### 3.1.2 Hydrology

(1) Hydrology of Baodi District

Baodi District is criss-crossed by rivers and water networks, with a water area of 303,300 mu. At present, there are 6 primary flood discharge river channels, i.e. Chaobaixin River, Qinglongwan Jianhe River, leading Juhe River into Chaohe River, Jiyun River, Beijing Sewage Discharge River; 8 secondary river channels, i.e. Wuhe River, Baoqiu River, Baili River, Wotou River, Xiuzhen River, Jiangan River, diversion river and Qinglongwan Old Road; 87 main canals and 508 branch canals.

(2) Hydrology of Dashiqiao City

In addition to the Daliao River on the western border, the main rivers in Dashiqiao City also include the Daqing River and its tributaries running through the eastern and central parts. The Daqing River in Dashiqiao City belongs to the upper reaches of the Daqing River. It is divided into East Daqing River and West Daqing River according to the basin. Originating from Lv Wang, Jianyi and Huangtuling Town, the three tributaries of Hupiyu of East Daqing River flow into Shimen Reservoir after flowing into Huangtuling, and then flow into the mainstream of Daqing River in Gaizhou and then into the West Sea. There are Xiangfang Reservoir and Hupiyu Reservoir on the East Daqing River. The West Daqing River originates from Dajin Temple, Sheligou, Wafanggou of Zhoujia Town and Yingluo of Haicheng City. There are "Zhoujia Reservoir" and "Sandaoling Reservoir" on the West Daqing River. The two streams of water converge in Tangchi, through lower Tangchi from eastern Tangchi, exiting from Cigou and flowing into the mainstream of Daqing River in Gaizhou. Because the East and West Daqing River originate from the mountainous area and flow through the river channel with sandstone as the bottom, the river water is crystal clear and it is called Daqing River.

3.1.3 Topography and Geology

(1) Topography and geology of Baodi District

Baodi District has a multi-layer geological structure. According to the geological age, there are Sinian system in Proterozoic, Cambrian, Ordovician, Carboniferous, Permian in Paleozoic and Quaternary in Cenozoic. The geology in the territory is divided according to its internal structural position, bounded by the "Baodi Fault". The northern part is the southeastern edge of the Yinshan latitudinal tectonic zone, and the southern part is the northeastern part of the Neocathaysian secondary subsidence zone.

Baodi District is located in the northeast of North China Plain, which is a river alluvial and coastal plain landform. The terrain is relatively flat. The general trend of the whole terrain is higher in the northwest, with a ground elevation of 5~7m (Yellow Sea elevation, the same below), while the southeast is lower, with an elevation of 0.5~1m in general and a bottom elevation of 0.3m. The natural gradient from northwest to southeast in the territory is 1:5000~1:10000.

(2) Topography and geology of Dashiqiao City

Dashiqiao City is located in the south of Liaodong Peninsula, northeast of Yingkou City, on the left bank of the lower reaches of Liao River, with a total area of 1,610 km2. Dashiqiao City is adjacent to Laobian District in the west, to Dawa District of Panjin City in the northwest across the river, to Gaizhou City in the south, and to Haicheng City in Anshan and Xiuyan Manchu Autonomous County in the east. The geographic coordinates are between longitude 122°07′ and 122°59′E and latitude 40°18′ and 40°56′N.

The terrain of Dashiqiao inclines from east to northwest. In the west is the Liaohe River alluvial plain, with a minimum altitude of only about 2m. The central part is a buffer zone of plains and hills. In the east, it ranges upon a range of mountains, with winding mountains and valleys. There are Jinniu Mountain, Zunlong Mountain, Xiucai Mountain, Mizhen Mountain, Hailong Mountain, Panlong Mountain, etc. The old Jiaoding Mountain on the eastern border is 1033m above sea level.

## 3.2 Social Environment

3.2.1 Administrative Division and Population

(1) Baodi District, Tianjin

As of 2019, Baodi District has 6 subdistricts and 18 towns: Baoping Subdistrict, Yuhua Subdistrict, Haibin Subdistrict, Zhouliang Subdistrict, Zhaoxia Subdistrict, Chaoyang Subdistrict, Dabaizhuang Town, Koudong Town, Huogezhuang Town, Shigezhuang Town, Niudaokou Town, Dakoutun Town, Xinkaikou Town, Niujiapai Town, Haogezhuang Town, Datangzhuang Town, Erwangzhuang Town, Wangbuzhuang Town, Fangjiazhuang Town, Lintingkou Town, Bamencheng Town, Huangzhuang Town, Dazhongzhuang Town, Xin'an Town. The Baodi District Government is located in Baoping Subdistrict.

In 2020, the registered population of Baodi District was 748,700, an increase of 0.8% over the previous year. To be specific, there were 243,500 urban population and 505,200 rural population. The Han nationality is dominant, and there are 15 ethnic groups including Hui, Manchu, Zhuang, Mongolian, Korean, Yao, Tujia, Miao, Tibetan and Dong. According to the data of the seventh census, as of zero o'clock on November 1, 2020, the permanent population of Baodi District was 722,367.

(2) Dashiqiao City, Yingkou City

As of June 2020, Dashiqiao City has jurisdiction over 4 subdistricts and 13 towns, as well as 2 township-level units: Jinqiao Subdistrict, Shuiyuan Town, Qikou Town, Yong'an Town, Zhoujia Town, Gangdu Subdistrict, Gouyan Town, Huzhuang Town, Tangchi Town, Dashiqiao Rice Seed Farm, Baizhai Subdistrict, Shifo Town, Guantun Town, Jianyi Town, Dashiqiao Demonstration Park, Meidu Subdistrict, Gaokan Town, Boluopu Town and Huangtuling Town. The Dashiqiao Municipal People's Government is located in Meidu Subdistrict.

By 2020, the total population of Dashiqiao City was 685,000 including 222,000 urban population and 463,000 rural population. There are Han, Manchu, Mongolian, Hui, Korean and other ethnic groups. According to the data of the seventh census, as of zero o'clock on November 1, 2020, the permanent population of Dashiqiao City was 607,098.

(3) Characteristic distribution of sampled objects in the project area

In the Project, 302 and 151 farmers were selected from Baodi District of Tianjin City and Dashiqiao City of Yingkou City of Liaoning Province respectively for questionnaire survey. The age group, gender distribution and ethnic distribution of the sample survey respondents are shown in the table below.

Characteristic distribution of sampled objects in the project area

Table 3.2-1

Investigation scope		A	Age group		Gender		Ethnic group		р
	Item	Youth	Middle	Old	Famala	Male	Han	Manahu	Hui
	ŶĊ	Touur	aged	aged	Female	Male	пап	Manchu	пш
D I	Number of	86	62	3	59	92	148	2	1
Baodi	Personnel	80	02	3	39	92	140	2	1
District	Proportion	57%	41%	2%	39%	61%	98%	1%	1%
	Number of	130	161	11	232	70	302	0	0
Dashiqiao City	Personnel	150	101	11	232	70	302	0	0
	Proportion	120/	520/	40/	77%	23%	100	0	0
	Proportion 43%	53%	4%	//%	23%	%	0	0	

Note: Young people are under 45 years old, middle-aged people are 45 to 60 years old (excluded), and elderly people are 60 years old and above.

The ages of the respondents in Baodi District and Dashiqiao City were mainly young and middle-aged, accounting for 98% and 96% respectively. The gender ratios of male and female respondents in the sample surveys in the two places are different: males account for about 61% in Baodi District, and females account for about 77% in Dashiqiao City. The sample survey in Baodi District involved 3 ethnic minority farmers, including 1 Hui and 2 Manchus. The sample survey objects in Dashiqiao City do not involve ethnic minority farmers.

According to the site survey, although there are mainly Hui and Manchu ethnic minority residents in the area where the project is located, they have long been integrated with the local Han people for a long time. Chinese is the common local language, and there is no language barrier. Ethnic minority groups live scatteredly, do not form concentrated residential areas, and enjoy national preferential policies for a long time, and do not meet the Bank's definition of Indigenous Peoples.

3.2.2 Socio-economic Profile

(1) Baodi District, Tianjin

In 2020, the annual GDP of Baodi District was RMB 35.437 billion, a decrease of 4.3% compared with the previous year, calculated at comparable prices. By industries, the added value of the Primary Industry was RMB 3.097 billion with a growth of 1.7%, that of the Secondary Industry was RMB 11.74 billion with a decrease of 9.5%, and that of the Tertiary Industry was RMB 20.601 billion, with a decrease of 1.3%. Structure of the three industries: 8.8: 33.1: 58.1. The added value of private economy was RMB 21.561 billion, accounting for 60.8% of the GDP. In 2020, the general public budget revenue of Baodi District was RMB 3.173 billion, down 43.9%. Among them, the tax revenue was RMB 2.335 billion, down 19.1%, accounting for 73.6% of the general public budget revenue, up 22.6% from the previous year. From the perspective of main taxes, the value-added tax was RMB 764 million, down 19.9%; the corporate income tax was RMB 349 million, up 0.4%; the individual income tax was RMB 8.542

\*OFFICIAL USE ONLY

billion, down 32.3%, of which the general public service expenditure was RMB 1.132 billion, up 2.9%; public security expenditure was RMB 473 million, up 0.5%; education expenditure was RMB 1.959 billion, down 26.6%; social security and employment expenditure was RMB 1.326 billion, down 0.8%. In 2020, the per capita disposable income of rural permanent residents in Baodi District was RMB 24,531. The average annual rental income of the rented farmers in the Project is about RMB 1,500, equivalent to an increase of 6.1% in per capita disposable income.

(2) Dashiqiao City, Yingkou City

In 2019, the GDP of Dashiqiao City reached RMB 33.5 billion, an increase of 6.5%; general public budget revenue reached RMB 2.23 billion, an increase of 0.5%; the per capita disposable income of urban and rural permanent residents was RMB 38,400 and RMB 18,902 respectively, with an increase of 7.6% and 6.8%. In 2020, the GDP of Dashiqiao increased by 0.5%; fixed assets investment increased by 2%; general public budget revenue fell by 12.1%; tax revenue fell by 22.5%; industrial value added above designated size declined by 7%; retail sales of consumer goods fell by 3%; the per capita disposable income of urban and rural permanent residents increased by 5.5% and 7% respectively. In 2021, the per capita disposable income of rural residents in Dashiqiao City was RMB 23,493. The average annual rental income of the rented farmers in the Project is about RMB 2,500, equivalent to an increase of 10.6% in per capita disposable income.

### 3.2.3 Traffic and Transportation

(1) Baodi District, Tianjin

Baodi District has a developed railway system, including Jitang Railway, Beijing-Binhai Intercity Railway, Tianjin-Chengde Intercity Railway, Tangtong Highway, Tanggu-Chengde Expressway, Tanglang Expressway, Jinji Highway, Tianjin-Jizhou Expressway, Baoping Highway, Jinwei Highway, Beijing-Shenyang Expressway, Daheilin Road, Jingtang Highway, and Jinji Railway passing through Baodi District.

(2) Dashiqiao City, Yingkou City

There are 2 railway freight marshalling stations in Dashiqiao City, and Dashiqiao Railway Station is a national first-class station. Shenyang-Dalian-Beijing-Shenyang Expressway, Harbin-Dalian Highway, Harbin-Dalian Electrified Railway and Harbin-Dalian High-speed Railway Passenger Dedicated Line run through the whole territory. It is 200 kilometers away from Dalian Port, 20 kilometers away from Yingkou Port and 40 kilometers away from Bayuquan Port. It takes only one and a half hours to drive to Shenyang and Dalian Airport, 15 minutes to Yingkou Lanqi Airport and 5 hours to Beijing.

3.2.4 Minerals, cultural relics and military installations

(1) Baodi District, Tianjin

In the southeast of Beitan Village, Baodi District, there is coal underground, with a burial depth of 300~500m. The reserves are rich, with 25 million tons of coal per square kilometer. In 2010, the proven reserves were 306.06 million tons. The coal grades are gas coal and fat gas coal, with strong cohesiveness and tar content of more than 10%. After the intrusion of shallow igneous rock, it locally becomes lean coal and anthracite.

Cultural relics in Baodi District include Baodi Dajue Temple, Beiyinrensi Martyrs Cemetery, Lintingkou Wangjia Courtyard, etc. Dajue Temple is located in the north of Dongjie Road, Baodi District, Tianjin. Founded during the reign of Chongxi, Liao Dynasty (1032-1054), it is one of the eight sceneries of Baodi. Beiyinrensi refers to the martyr's cemetery. Located on the west side of Zhaoxia Park, it covers an area of 27,900 square meters from south to north, of which the mausoleum area covers an area of 2,250 square meters.

(2) Dashiqiao City, Yingkou City

There are 27 kinds of proven mineral deposits in Dashiqiao City, including 21 kinds of nonmetallic ores such as magnesite, talc, boric spar, limestone and silica; there are 6 kinds of precious and rare metal deposits including gold, silver, copper, cobalt, uranium and iron. To be specific, the total proven reserves of magnesium ore are 4.456

billion tons, and the retained reserves are 4.363 billion tons.

The cultural relics in Dashiqiao City include the ruins of Yingshougou. Yingshougou ruins are located in Yingshougou Village, Tangchi Town, Dashiqiao City, distributed in the residential area of villagers and on both sides of Zhoutang Highway. There are Han tombs in the mountains in the northeast and southeast of the ruins. In 1984, Yingkou Municipal People's Government announced the Yingshougou ruins as a municipal cultural relic's protection unit.

No restrictive factors such as minerals, cultural relics and military facilities are involved in the Project.

## 3.2.5 Public security

It is understood that the social security in Baodi District of Tianjin and Dashiqiao City of Yingkou City involved in the Project is generally stable and good. The incidence of traditional public security incidents and civil disputes such as theft, robbery, traffic accidents and disputes among the masses near the project area is generally stable, and there is no obvious upward trend.

# 4. Comparison and Analysis of Project Schemes

## 4.1 With/without Project Analysis

(1) The project construction will promote the development of new energy industry

Our government has regarded the development of PV industry as an important aspect in the field of energy, and incorporated it into the basic policy of national energy development. The Renewable Energy Law, which was officially implemented on January 1, 2006, clearly specifies the responsibilities and obligations of the government and society in the development and utilization of PV power generation. A series of systems and measures have been established to encourage the development of PV industry, support the grid connection of PV power generation, preferential on-grid price and cost-sharing of the whole society, and give various preferential treatment to PV industry in many aspects such as loans and taxes. Under the severe situation of energy and environment in China, this law will guide and encourage various economic entities at home and abroad to participate in the development and utilization of PV technology in China.

In accordance with the spirit of the Notice of the State Council on Issuing the Comprehensive Work Plan for Energy Conservation and Emission Reduction (GF [2007] No.15) and the Notice of the Ministry of Finance and the Ministry of Construction on Issuing the Interim Measures for the Administration of Special Funds for Renewable Energy Building Applications (CJ [2006] No.460), the central financial department arranges part of the funds from the special funds for renewable energy to support the demonstration and promotion of solar PV applications in urban and rural buildings.

Therefore, the Project conforms to the national policy of encouraging the development of PV industry and supporting the energy industry policy of PV power generation and grid connection.

(2) The project construction will make rational use of local solar energy resources Baodi District enjoys a warm temperate semi-humid continental monsoon climate, and Dashiqiao City enjoys a warm temperate semi-humid continental monsoon climate. The solar energy resources in the two places belong to Class B "rich in resources" area, which is suitable for the construction of large-scale PV power stations.

The project construction will make rational use of local abundant solar energy resources, improve the power supply structure of the region, and replace some power generation equipment with high energy consumption and high pollution. While improving the environmental quality, it can also increase employment opportunities for local residents, drive the development of relevant industries and meet the power demand of residents, bringing good social and environmental benefits.

(3) The project construction is conducive to energy conservation and emission reduction and improvement of the ecological environment

Protecting and improving the environment on which human beings depend and realizing sustainable development are the common wishes of people all over the world. Our government has made sustainable development a basic strategy for economic and social development and has taken a number of major initiatives. The reasonable development and economical use of natural resources, improvement of resource utilization mode, adjustment of resource structure allocation and improvement of resource utilization rate are all effective ways to improve the ecology and protect the environment.

(4) The project construction can promote social and economic development

Science and technology tourism is a new tourism form, which promotes tourism development and boosts the cultural and scientific qualities of the public. PVPSs are new green energy projects, and upon the completion of the PV station, it will become a new highlighted point of science and technology tourism and vigorously promote the development of the local tourist industry.

4.2 Analysis of Project Site Selection

4.2.1 Suitability of social conditions

(1) Locational conditions

Baodi District of Tianjin is located in the north of Tianjin, the north of North China Plain and the south foot of Yanshan Mountain. It is adjacent to Yutian County and Ninghe District of Tianjin in the east and southeast, and Ninghe District and Wuqing District in the south and southwest. The west and northwest are connected with Xianghe County and Sanhe City, Langfang City, Hebei Province. It faces Jizhou District of Tianjin in the north and Yutian County of Tangshan City, Hebei Province in the northeast across the river. According to the relevant literature, the agricultural land area in Baodi District of Tianjin is about 105,349.8 hectares, accounting for 69.77% of the total land area of the whole district; the total scale of construction land is 28,523.1 hectares, accounting for 18.89% of the total land area of the whole district. The urban and rural construction land is 22,422 hectares, providing sufficient construction sites for distributed PVPS projects. According to the site survey, the rural houses in Baodi District of Tianjin are basically single-storey tile houses or bungalows, with basically the same orientation and the same area and type, which have good construction conditions for household PVPSs.



Figure 4.2-1 Aerial Photos of Rural Housing in Baodi District

Dashiqiao City of Yingkou City is located in the south-central part of Liaoning Province, on the left bank of the lower reaches of the Liao River, bordering on Gaizhou in the south, bordering on Haicheng in the north, connecting with Xiuyan Manchu Autonomous County in the east, and facing Yingkou City and Panjin across the river in the west. The construction land of Dashiqiao City is mainly composed of residential land, industrial land, public facility land and road square land. The residential land accounts for 51.79% of the total construction land, providing sufficient construction sites for distributed PVPS projects. According to the site survey, the rural houses in Dashiqiao City, Yingkou City are basically single-storey tile houses or bungalows, with large courtyards, which have good construction conditions for household PVPSs.



Figure 4.2-2 Aerial Photos of Rural Housing in Dashiqiao City

- (2) External supporting conditions
- 1 Water supply

Because the construction area is scattered, the construction water consumption is not large. The construction water of PV panel bracket foundation is connected with the water of municipal water supply network nearby.

2 Power consumption

The main electromechanical equipment in site construction includes the electric welding machine, electric cutting saw, electric drill, etc. The electric welding machine has the largest power consumption. The layout of the circuit shall take the layout of the

electric welding machine as the main consideration, and the total power load is about 200kW. When the power supply and water supply facilities of the General Contractor are used, separate meters shall be installed for measurement and payment shall be made according to the meters.

③ External transportation

The equipment and materials are mainly transported by car and road, among which PV modules are mainly transported by container trucks and electrical equipment are transported by medium-sized trucks.

4.2.2 Suitability of natural resources and environmental conditions

(1) Baodi District

① Natural environment

Tianjin is located on the eastern bank of mid-latitude Eurasia and it has a continental climate, dominated by East Asian monsoon due to monsoon circulation. The climate there is characterized by four distinctive seasons. Specifically speaking, the spring is windy and dry without much rainfall; the summer is hot and has much rainfall; the autumn is cool and has comfortable weather; the winter is cold and dry without much snow. The average frost-free period in Tianjin is 196~246 days, the longest frost-free period is 267 days, and the shortest frost-free period is 171 days. Among the four seasons, summer and winter are about 120-150 days, and spring and autumn are about 40-65 days. The annual average precipitation in Tianjin is 520-660mm, and the precipitation days are 63-70 days. In terms of regional distribution, there are more mountains than plains and more coasts than inland areas. In terms of seasonal distribution, the precipitation in June, July and August accounts for about 75% of the annual precipitation. The sunshine time in Tianjin is relatively long, with annual sunshine hours of 2500~2900h.

2 Solar resources

Tianjin is the birthplace of China's PV industry. On the whole, there are abundant solar energy resources. According to the distribution map of solar energy resources,

Tianjin is a second-class region with good conditions for utilizing solar energy.

The Project is located in Baodi District, Tianjin. Baodi District is dominated by a warm temperate semi-humid continental monsoon climate. It has four distinctive seasons, short spring and autumn, long summer and winter, annual average temperature of 11.6°C, annual precipitation of 612.5 mm, and annual frost-free period of about 184 days on average.

According to the annual total solar radiation generally used for solar energy resources, the annual total solar radiation values in all parts of Tianjin are 4200~5400MJ/m2, and the annual total solar radiation in most parts of Tianjin is >4500 MJ/m2. Most parts of Tianjin belong to the region rich in solar energy resources in China, suitable for the construction of PVPSs.

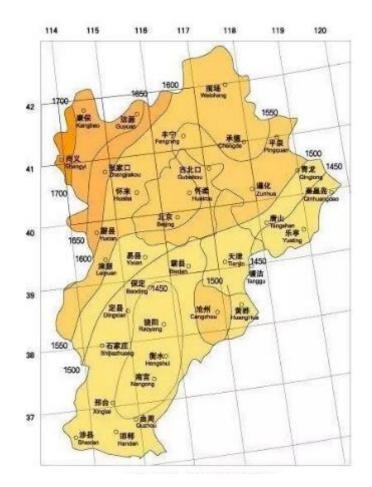


Figure 4.2-1 Distribution Map of Solar Energy in Beijing, Tianjin and Hebei

Provinces


(2) Dashiqiao City

① Natural environment

Dashiqiao city is dominated by a warm temperate semi-humid continental monsoon climate. The whole year is characterized by sufficient sunlight, distinct seasons, synchronous rain and heat, and concentrated rainfall, with an annual average temperature of 8°C-9°C, annual average rainfall of 640-750mm, and a frost-free period of about 175 days.

2 Solar resources

According to the Feasibility Study Report on 50MW Distributed PV Power Generation Project in Dashiqiao City, Liaoning Province, the average annual total solar radiation in Liaoning Province decreases from north to south, and is smaller in the west than in the east. The annual sunshine hours in Liaoning Province reached about 2523h, the annual cumulative solar radiation reached 5626.1MJ/m2, and the solar energy resources in Dashiqiao City were stable, providing extremely favorable natural conditions for the utilization of solar energy.

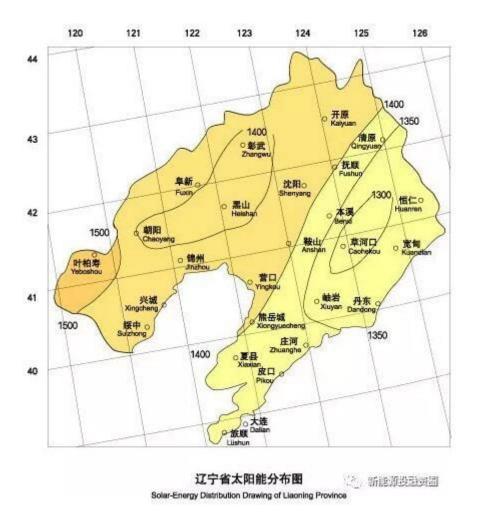



The area where the proposed site is located has sufficient sunshine and the average annual total radiation is 5172.3MJ/m2, which is suitable for the construction of large-scale PVPSs.

4.2.3 Ecosystem suitability

To construct PV modules on existing roofs and courtyards of rural households, no land will be added. Only construction vehicles and personnel during the construction period may have a short-term impact on the surrounding environment, but this impact will disappear with the end of the construction period.

In addition, according to the project feasibility study report, the sunlight conditions in Baodi District of Tianjin and Dashiqiao City of Yingkou City of Liaoning Province are relatively sufficient and suitable for the implementation of distributed PV projects. Except that the traffic of construction vehicles and personnel during the construction

**\*OFFICIAL USE ONLY** 

period may cause temporary disturbance to the surrounding environment, it will not have an adverse impact on the local ecological environment.

4.2.4 Suitability with surrounding development activities

The Project is a distributed PV project, and the construction site is the roof or courtyard of rural housing. The main development activities around the construction site mainly include production, living, transportation and other activities of farmers. The Project basically has no impact on the surrounding development activities.

4.3 Comparison and Analysis of Engineering Technology

(1) Comparison of solar power generation system modes

The distributed PV grid-connected power generation system can be divided into self-generated and self-consuming surplus feed-in grid mode and full feed-in grid mode.

The mode of "self-generation, self-consumption, surplus feed-in grid" means that part of the electric energy generated by the PV system is consumed by the local load, and the rest of the electric energy is directly fed into the grid.

The full feed-in grid mode is that all the electric energy generated by PV power generation is directly fed into the power grid and is not consumed by local loads.

In comprehensive consideration, the PV power generation system constructed by the Project adopts the full feed-in grid mode.

(2) Comparison and selection of PV modules

The PV power generation system connects a large number of PV modules with the same specifications and characteristics in series through a number of solar modules to reach the rated input voltage of the inverter, and then connects such cell panels in parallel to reach the predetermined rated power of the system. These devices are numerous. In order to avoid mutual shielding between them, they must be arranged at a certain spacing to form an array, which is called PV power generation array. A circuit consisting of several PV modules of the same specification and characteristics connected in series is a basic array unit. Each PV power generation array consists of a solar module, inverter and step-up power distribution room with a predetermined power.

Several PV arrays form a PVPS through the connection of electrical systems. The selection of appropriate PV modules has a great impact on the investment, operation and benefit of the whole power station.

At present, the highest laboratory efficiency of solar cells in the world is: 24% (4cm<sup>2</sup>) for monocrystalline silicon cells, 18.6% (4cm<sup>2</sup>) for polycrystalline silicon cells, 30.28% (AM1) for InGaP/GaAs double junction cells, 14.5% (initial), 12.8% (stable) for amorphous silicon cells, 15.8% for cadmium telluride cells, 14.6% for silicon ribbon cells, and 10.96% for TiO2 nanocrystalline organic solar cells. Crystalline silicon cells mainly have the following characteristics:

(1) The crystalline silicon cells are featured by mature technologies, stable performance and long service life.

<sup>(2)</sup> Among the solar cells used commercially, monocrystalline silicon has the highest conversion efficiency, followed by polycrystalline silicon, but the difference between the two is not significant.

③ The crystalline silicon cell assembly has an extremely low failure rate and the simplest mode of operation and maintenance.

④ In the open space, the crystalline silicon PV assembly can be installed simply and conveniently, and laid out compactly, with space saved.

<sup>(5)</sup> Although the amorphous silicon film cell has certain advantages in price, weak light response and high-temperature performance, it has a relatively short service life.

After taking the factors above into consideration, crystalline silicon solar cells are proposed to be used in the Project.

Crystalline silicon modules are mainly divided into monocrystalline and polycrystalline. There are significant differences between monocrystalline silicon and polycrystalline silicon in crystal quality, electrical properties and mechanical properties. The production process of monocrystalline silicon is more complex than polysilicon, and the cost is higher than polysilicon. In the early stage of the rapid development of PV industry, it mainly pays attention to production capacity, and the production capacity of monocrystalline silicon is difficult to meet the market demand in terms of expansion speed. However, monocrystalline silicon has excellent properties, and more than 30 years of practice have proved the reliability of the monocrystalline technology route. Since 1994, the decay rate of the monocrystal PV system in Ningbo, China is only 3.1%, and the monocrystal rooftop PV system built in Munich, Germany in 1997 has an average annual decay rate of only 0.4%, the difference of which is obviously due to polysilicon. In addition, due to the irregular arrangement of polysilicon, the power station is prone to crack in the long-term alternation of high and low temperatures. The monocrystal structure has better mechanical performance and better crack resistance than polysilicon. On the whole, the unit power generation per unit area of monocrystalline silicon is about 5% higher than that of polysilicon. The main advantages of monocrystalline silicon power generation are low operating temperature, weak light response, low line loss, low attenuation, and so on. At high temperatures, the temperature difference between the monocrystalline and polycrystalline modules is about 3°C-5°C, and the power of the module will decrease by about 0.4% every time the temperature increases by 1°C.

With the continuous expansion of the installed capacity of PVPSs in China, the further improvement of the efficiency of PV modules, and the arrival of large-scale production, the low-cost advantage of polysilicon modules has become a secondary factor. In addition, with the development of diamond wire cutting and PERC (Passivated Emitter and Rear Cell) technology in recent two years, the cost of monocrystalline silicon modules has been greatly reduced, and the market share of monocrystalline silicon surpassed polysilicon for the first time in 2017. According to statistics, the market share of monocrystalline silicon is 46%. By the end of 2018, all monocrystalline modules were basically converted to PERC production line, and the power of monocrystalline modules was generally increased.

PV modules are the core components of a PV power generation system, and their

parameters and indexes have a direct influence on the power generation performance of the whole system. The parameters for the performance of PV modules mainly include module peak power, peak current, peak voltage, short-circuit current, open-circuit voltage, maximum system voltage, module efficiency, temperature coefficient of shortcircuit current, temperature coefficient of open-circuit voltage, temperature coefficient of peak power, etc. under standard test conditions.

Considering various factors such as module efficiency, technical maturity, market share, module production capacity, project construction period, manufacturer's supply capacity, etc., solar modules with large unit area power shall be preferred to reduce floor area, save cable, and reduce module installation. Based on the current industrial status and production capacity of the domestic PV module market, the mainstream and leading crystalline silicon PV modules in the market are selected for comparison. Through preliminary investigation, the module efficiency of each manufacturer reaches the full mark, mainly including monocrystalline modules. **Therefore, the single crystal module is recommended in this technical scheme.** 

(3) Comparison and selection of crystalline silicon PV modules

Considering the module efficiency, technical maturity, market share and the available options when purchasing and ordering, it is proposed to select the high-efficiency monocrystalline silicon 540Wp module for the Project, with a module efficiency of 20.4%.

(4) Comparison and selection of inverters

An inverter is the core equipment of PV system. During design and model selection, corresponding technical indicators shall be considered to ensure the stable operation of the PVPS and improve the energy output. At present, the mainstream inverters can be divided into centralized inverters, string inverters and distributed inverters. Compared with centralized inverters, string inverters have a series of advantages such as no increase in system investment, higher investment income and availability, which are specifically shown in the following aspects:

(1) No increase in initial investment.

The initial investment cost of the string inverter PVPS is not higher than that of the traditional PVPS due to the simplified design, no DC combiner box and DC distribution cabinet, no civil engineering room, simple component installation and other characteristics. At the same time, due to the small volume, light weight and standardization of the string inverter, it can be manufactured on a large scale through automatic assembly line, with a small proportion of labor cost and obvious scale advantages.

<sup>(2)</sup> String-level intelligent monitoring and multi-channel MPPT tracking technology ensure that the power station is "visible, credible, manageable and controllable", and the power generation is increased by more than 3% compared to the centralized one.

The string inverter PVPS conducts independent voltage and current detection for each input string, and the detection accuracy is more than 10 times that of the traditional intelligent combiner box scheme, laying a foundation for accurately locating string faults and improving operation and maintenance efficiency. Multi-channel MPPT technology reduces the impact of shielding, dust and string mismatch, and increases the energy output by more than 5% under flat terrain installation conditions.

(3) Reliable operation and maintenance-free design of the system for 25 years.

The IP66 protection grade is adopted for the string inverter to realize the internal and external environmental isolation, keep the device in a stable operating environment, and reduce the impact of external environment such as the temperature, sandstorm, and salt spray on the service life of the device. The system has no vulnerable parts, and there is no fuse and fan, etc., and the device needs to be replaced regularly to realize a maintenance-free system.

(4) The actual utilization rate of the installed capacity of PVPSs is high.

The PVPS with string inverters has a simple structure and is essentially a distributed parallel system. The failure of a single inverter does not affect the operation

of other equipment. Moreover, due to its small size, light weight, site spare parts for the whole machine and easy installation and maintenance, the availability of the system is greatly improved, and the impact of the failure on the energy output is much smaller than that of the centralized type.

⑤ The intelligent PVPS can be upgraded and evolved.

When the module technology progresses and the operating environment changes, the software of the string inverter can be remotely upgraded online, with backwardcompatible design and other characteristics, without replacing the online operating equipment. The latest technical achievements can be enjoyed through algorithm upgrading, so as to maximize the reuse of existing equipment.

(6) Intelligent active grid adaptive technology realizes grid friendliness.

The string inverter can actively monitor the harmonics of the grid and inject reverse harmonics into the grid, which is conducive to improving the power quality of the grid. Better realization of multi-machine parallel control, better grid-connected harmonic quality, better meeting the requirements of grid access, and improving adaptability in harsh grid environments.

⑦ High safety.

The string inverter PVPS is designed without DC combination. The DC output by the string directly enters the inverter and is inverted into AC for long-distance transmission, actively avoiding the safety and protection problems caused by DC transmission. At the same time, the PID effect is effectively solved.

(8) String inverter PVPS is environmentally friendly.

The string inverter is designed without fans, which realizes a low environmental noise of 33dB; there is no need for a civil engineering room to reduce environmental damage to vegetation and soil; the electromagnetic radiation is small, which protects human health. The intelligent PVPS realizes harmonious coexistence between people and the environment, greatly increasing the applicable scope of the PVPS and creating conditions for PV households.

#### Considering the above aspects, string inverters are adopted for the Project.

(5) Comparison and selection of PV arrays

The optimal inclination for fixed installations depends on many factors, such as the geographical location, distribution of solar radiation throughout the year, ratio of direct radiation and diffused radiation, supply power requirements for loads, and special on-site conditions. There are mainly three types of roofs in the Project: color steel tile roof, red brick tile roof and concrete roof.

The concrete roof is arranged according to the optimal inclination of 32°, and the color steel tile and red brick tile roof are arranged according to the slope of each roof.

The principle for the arrangement of PV modules in the Project: It must be ensured that on the winter solstice with the lowest sun altitude angle, all modules still have more than 6 hours of sunshine time.

The Project is a roof household PV project. Color steel tile and red brick tile roof components are tiled on the roof without shadows shielding each other. Only one array is arranged on each roof, which will not cause mutual shielding between arrays.

In the northern hemisphere, the plane corresponding to the maximum solar radiation receiving amount is the inclined plane facing the due south and the inclination of the horizontal plane is equal to the local latitude. The fixed PV module shall be installed obliquely according to the inclination. After the inclination of the array is determined, it shall be noted that a reasonable spacing shall be set between the front and rear arrays from the north to the south to avoid shadow shielding. And from 9: 00 a.m. to 3: 00 p.m. (true solar time) on the winter solstice (the day of the year when objects have the longest shadow length under the sun), the spacing between the front and rear arrays shall be no shadowing between the modules in the north and south directions.

PV array is obtained by series and parallel connection of the modules. The series connection of PV modules must meet the requirements for DC input voltage of the inverter, and their parallel connection must meet the requirements for input power of the inverter.

- (6) Comparison and selection of PV brackets
- 1) Scheme for brackets of color steel tile roof

The roof part of the existing building adopts the bracket scheme of adding bearing + guide rail to the roof, and replaces the connecting bolt between the rib of profiled steel sheet with color steel tile and the roof purlin with self-tapping screws, so that the connection between the bracket and the profiled steel sheet on the roof is firm, and waterproof measures are taken at the connection between the bracket and the profiled steel sheet on the roof. The guide rail and the bearing are hinged and connected by bolts, and the modules are bolted and connected with the guide rail by pressing blocks. Each array bracket is equipped with 36 (2×18) modules to meet the requirement of one string. The modules on the bracket are arranged in two rows horizontally, with a horizontal spacing of 20mm and a longitudinal spacing of 20 mm between adjacent modules. Color steel tile roof modules are installed in a flat way along the slope, and convenient and correct grounding must be considered.

(2) Scheme for brackets of concrete roof

The roof part of the existing building adopts the scheme of counterweight block foundation + bracket, and adopts the prefabricated plain concrete counterweight block foundation. The counterweight block foundation is embedded with anchor bolts, which are bolted to the upper bracket, and the modules are connected to the guide rail bolts through pressing blocks. The inclination of the bracket is 32°, and 36 ( $3 \times 12$ ) modules are mounted on a single array bracket. The horizontal spacing of the modules is 20mm and the longitudinal spacing is 20mm. Q235B and Q355B section steels are used.

③ Scheme for brackets of tile roof

The roof part of existing buildings adopts the bracket scheme of beam + guide rail + pressing block. Cross beams are arranged perpendicular to the roof ridge on the south slope roof, and the upper guide rails are arranged perpendicular to the cross beams. The cross beams and guide rails are connected by bolts through the purlin bracket, and rubber pads are used to separate the cross beams from the roof to avoid direct contact between the brackets and the roof. The modules are bolted to the guide rail by a pressing block. The guide rail and the east-west gable are supported and fixed by channel steel. The cross beam crosses the ridge, and then a cross beam is drawn to the north slope, which extends out of the roof to connect the support and is fixed to the rear eaves wall through hinged connectors. Each array bracket is equipped with 36 (2×18) modules to meet the requirement of one string. The modules on the bracket are arranged in two rows horizontally, with a horizontal spacing of 20mm and a longitudinal spacing of 20 mm between adjacent modules. Tile roof modules are installed in a flat way along the slope, and convenient and correct grounding must be considered.

(4) Courtyard ground bracket scheme

The courtyard ground bracket scheme refers to the concrete roof bracket scheme. It adopts the scheme of counterweight block foundation + bracket, and adopts the prefabricated plain concrete counterweight block foundation. The counterweight block foundation is embedded with anchor bolts, which are bolted to the upper bracket, and the modules are connected to the guide rail bolts through pressing blocks. The inclination of the bracket is 32°, and 36 modules are mounted on a single array bracket. The horizontal spacing and longitudinal spacing of the modules are both 20mm. Q235B and Q355B section steels are used.

## 5. Social and Environmental Impact Assessment

## 5.1 Legitimacy of project establishment

The Baodi 50MW Distributed PV Project has been registered with the Administrative Examination and Approval Bureau of Baodi District, Tianjin for fixedasset investment projects of domestic enterprises (see Annex 1), and the project code is 2112-120115-89-03-984322. The Dashiqiao 50MW Distributed PV Project has been registered with the Administrative Examination and Approval Bureau of Dashiqiao for fixed-asset investment projects of domestic enterprises (see Annex 2), and the construction of the Project is legal.

### 5.2 Conformity with Industrial Policies

According to the Guiding Catalogue for Structural Adjustment of Industry (2019 edition), distributed PV projects are not restricted or eliminated projects. Therefore, the Dashiqiao 50MW Distributed PV Project and the Baodi 50MW Distributed PV Project are allowed projects and conform to the national industrial policies.

## 5.3 Legitimacy of site selection and route selection

The preliminary site selection of Dashiqiao 50MW Distributed PV Project includes 17 towns and subdistricts in Dashiqiao City, Liaoning Province, and the preliminary site selection of Baodi 50MW Distributed PV Project, Tianjin includes 10 towns and subdistricts in Baodi District, Tianjin. At present, both projects have completed the registration of investment projects in the local administrative approval bureau. At the same time, the project planning and site selection does not involve ecological environmentally sensitive areas such as nature reserves, ecological red line areas and scenic spots.

Therefore, the site selection and route selection of the Project meets the requirements of relevant laws and regulations.

## 5.4 Legitimacy of approval procedures

The feasibility study design of the Project is carried out in accordance with the

relevant design specifications of the PVPS project, and the project design scheme meets the requirements of relevant specifications. All approvals of the Project shall be carried out in accordance with relevant national laws, regulations and rules. The construction can be carried out according to the relevant approval scale and content only after obtaining the legal approval procedures for all links.

All procedures in the early stage of the Project shall be handled in accordance with the requirements of relevant laws and regulations, and relevant units shall review and approve them according to the scope of authority stipulated by laws and regulations, and there shall be no contents and procedures that do not meet the requirements of laws and regulations.

### 5.5 Understanding of Stakeholders

Stakeholders of the Project mainly include the project construction subject (Beijing Xiangju New Energy Technology Co., Ltd.), farmers directly contracted with the Project and government agencies in the project site.

(1) Impact on farmers contracted with the Project

According to the site survey, the main leased places are the roofs and courtyards of farmers. The main functions of the roofs of farmers are to bear loads and provide shelter. On the premise of meeting the requirements of safe construction, the Project basically has no impact on the functions of the roofs. The main functions of the courtyard include leisure walking, stacking articles, planting plants, etc. The Project has a slight impact on the function of the courtyard. Before signing the contract, farmers will be clearly informed of this impact, and they have absolute freedom to decide whether to sign the lease contract. Therefore, the Project will have a certain impact on the production and life of farmers, but it must be within the acceptable range of farmers.

In 2020, the per capita disposable income of rural permanent residents in Baodi District was RMB 24,531. The average annual rental income of the rented farmers in the Project is about RMB 1,500, equivalent to an increase of 6.1% in per capita disposable income. In 2021, the per capita disposable income of rural residents in

Dashiqiao City was RMB 23,493. The average annual rental income of the rented farmers in the Project is about RMB 2,500, equivalent to an increase of 10.6% in per capita disposable income. It can be seen that the Project will bring about a significant increase in the per capita income of local farmers.

2 Impact on government agencies in the project site

First of all, local workers will be employed during the construction period of the Project, which will solve some employment problems and stimulate local economic development to a certain extent. Secondly, during the operation period of the Project, considerable fixed annual income will be created for a large number of local farmers, which will improve the life of local rural people.

The Project is a PV power generation project, and the power generation will be fully connected to the grid. The total power generation of Dashiqiao City Project within 25 years will be 1,647,438,800kWh, and the total power generation of Baodi District Project within 25 years will be 1,702,195,000kWh, which can relieve the pressure of local power consumption and promote the development of local new energy industry.

## 5.6 Impact on Indigenous Peoples

According to the requirements of the Bank, the environmental and social standards of indigenous peoples will be triggered when they are currently within the planning scope of the Project or have a collective connection with the planning scope and are likely to be affected by the Project. The definition of Indigenous Peoples mainly includes the following characteristics:

(1) Self-identification as members of a distinct indigenous cultural group and recognition of this identity by others;

(2) Collective attachment to geographically distinct habitats, ancestral territories or areas of seasonal use or occupation in the Project area and to the natural resources in these areas;

(3) Customary cultural, economic, social or political institutions that are distinct or separate from those of the dominant society or culture;

\*OFFICIAL USE ONLY

(4) A distinct language or dialect, often different from the official language of the country or region in which they live.

According to the site survey, the sample survey in Baodi District involved 3 ethnic minority farmers, including 1 Hui and 2 Manchus. The sample survey objects in Dashiqiao City do not involve ethnic minority farmers. The area where the Project is located mainly involves Hui and Manchu ethnic minorities. Chinese is the common local language and there is no language barrier. Hui and Manchu ethnic minority groups live in a scattered manner, and no concentrated residential area is formed. They are not socially vulnerable groups. Therefore, according to the Bank's framework document, the project does not involve indigenous peoples, so it will not trigger environmental and social standards for indigenous peoples.

## 5.7 Impact of Labor Inflow during Construction Period

The Project is constructed on the existing roof and in the courtyard, with a short construction period of about 6 months. The workers of the Project are all local people, and the main recruitment methods include online recruitment, recruitment by the Labor and Employment Bureau and recruitment in the talent market. The average number of site construction personnel in Dashiqiao City and Baodi District is 20, and the number of site construction personnel in peak period is 50. The workers will receive professional training before construction to ensure HSE-compliant construction and avoid conflicts and disputes. The average number of site operation and maintenance personnel during the operation period is about 6.

Since the labor force during the construction period and operation period of the Project comes from the local labor market, there is no risk of labor inflow. In addition, the workers of the Project will receive relevant training on occupational skills, safe construction, HSE-compliant construction, etc. before entering the site to ensure the smooth completion of construction, operation and maintenance work on the premise of HSE-compliant construction.

### 5.8 Analysis on Environmental Impact

5.8.1 Environment Impact Analysis during the Construction Period

5.8.1.1 Analysis of impact on ambient air quality

The main sources of air pollution during the construction of the Project include: dust generated during the loading and unloading and stacking of construction building materials and the transportation of construction vehicles; waste gas emitted by various construction machinery and transportation vehicles; welding smoke generated during the installation of PV brackets.

During the construction period of the Project, the dust will generate during the loading and unloading of construction materials, the running of transport vehicles, and the exposure of the site surface under windy conditions. The Sponsor shall supervise the Construction Contractor to take effective measures to prevent dust during construction. During the construction period of the Project, there are few factors affecting the atmospheric environment and the construction quantity is small. After effective prevention and control measures are taken, there will be no great impact on the surrounding environment and residents.

5.8.1.2 Analysis of impact on water environment

Construction wastewater and domestic sewage are mainly produced during the construction period. The office area relies on the original permanent office building of the Project, and the domestic sewage is incorporated into the municipal pipe network for treatment. The workers' accommodation is not in the construction area, and the workers live in the surrounding villages. The basic living facilities in the villages around the project are relatively complete, and the domestic sewage can be effectively treated. The domestic sewage during the construction period has little impact on the surrounding surface water bodies.

Since there is basically no production wastewater during the construction of distributed PV projects, only a small amount of construction vehicle washing wastewater is generated, and the main pollutant in the wastewater is only a small

amount of SS. Vehicle washing tanks and sedimentation tanks shall be set up in the main construction area of the Project to wash the vehicles entering and leaving the construction site, so as to prevent the vehicles from bringing dust into the social roads. After sedimentation, the wastewater from vehicle washing can be reused as construction water or for spraying for dust suppression. The sediment shall be dried in a certain area on the construction area, and then transported to the designated place for soil covering.

In addition, commercial concrete is adopted during the construction period of the Project, and no large-scale concrete mixing is carried out on site, and no mixing wastewater is generated. The construction wastewater will not have an impact on the surface water body after taking corresponding prevention and control measures.

5.8.1.3 Acoustic environmental impact analysis

The impact of construction noise on the environment during the construction of the Project can be divided into several stages, including installation works (bracket installation, module installation and other electrical equipment installation), equipment and system commissioning, etc. Since there may be multiple machines working at the same time during the actual construction process, and the noises from various noise sources have a great impact on each other, the Sponsor shall strictly implement the national Emission Standard of Environment Noise for Boundary of Construction Site (GB12523-2011) during the construction process, take effective noise reduction measures as far as possible, and avoid concentrated use of a lot of power mechanical equipment at the same time. There is no need for continuous construction such as largescale concrete pouring in the Project, so nighttime construction shall be prohibited, the control of construction noise shall be strengthened, and the impact of construction on the surrounding environment and sensitive targets shall be minimized.

As the Project is installed and implemented on the roof or in the courtyard of each farmhouse, certain noise impacts may be generated during the construction process. However, the area of PV panels installed by each farmhouse is small, the construction

**\*OFFICIAL USE ONLY** 

time is short, and the impact on the farmer will disappear after the construction is completed.

5.8.1.4 Impact analysis of solid waste

During the project construction period, the demolition of original buildings, a large amount of excavation and other works are not involved. The domestic waste of the workers is processed through the domestic waste storage and transportation facilities of surrounding villages. The domestic waste of office personnel is collected by the office building garbage bin and then uniformly collected and transported by the sanitation department. During the construction period, the solid waste mainly includes a small number of waste parts generated from the installation of PV modules, mainly including residual materials of cables and leftover materials of section steel brackets, which shall be recycled and processed in a timely manner so that they will not be scattered in the construction site and will not have an impact on the environment.

5.8.1.5 Analysis of impact on ecological environment

(1) Impact on biodiversity

The Project is mainly built on the roof of the existing building roofs and courtyards, without new land occupation, and the surrounding areas are common local animals and plants. The construction of the Project will not affect the biodiversity of the regional ecosystem.

(2) Impact of vegetation destruction during construction period

The Project will not increase the new land occupation, does not need to clear the surface vegetation, and will not cause damage to the vegetation.

(3) Analysis of impact on animal activities during construction period

The land area of the Project is residential land, which is mainly built on the roof or courtyard of existing buildings. The surrounding vegetation coverage is average, and there are many human activities. It is not an ideal habitat for nearby wild animals, and will not have a great impact on the survival and reproduction of wild animals within the land area. There are no rare and protected wild animals requiring key protection

within the assessment scope.

(4) Impact of water and soil loss

The Project is mainly built on the roof or courtyard of existing buildings, with no new land occupation and little impact on the regional ecological environment.

(5) Impact of land occupation

The Project is mainly built on the roof or courtyard of existing buildings, and does not involve occupation of basic farmland. No new land will be occupied during the construction of the Project, and solar modules will be erected above the roof of the villagers. The construction of the Project will not affect the current situation and planning of land use.

The Sponsor will also sign cooperation and lease contracts with cooperative farmers in accordance with the requirements of land management, so as to fully coordinate and jointly develop and construct. After properly handling the land occupation procedures, the project construction has little impact on the land use of the area.

The project construction area does not involve environmentally sensitive areas and wild animals and plants requiring key protection. During the construction process of the Project, the comprehensive protection measures combining engineering measures, vegetation measures, temporary measures and management measures will have little impact on the ecological environment in the Project area.

5.8.2 Analysis of Environmental Impact during Operation

5.8.2.1 Analysis of impact on ambient air quality

The PV power generation process does not involve fossil fuels, no waste gas is generated after it is put into operation, and there is no impact on the ambient air.

According to the feasibility study report of the Project, it is estimated that after the completion of Baodi 50MW Distributed PV Project, the annual average energy output will be 68,087,800 kWh, and about 20,800 tons of standard coal can be saved every year. Accordingly, about 55,400 tons of carbon dioxide (CO<sub>2</sub>), about 422.14 tons of

\*OFFICIAL USE ONLY

sulfur dioxide (SO<sub>2</sub>), and about 142.98 tons of nitrogen oxides (NO<sub>X</sub>) can be reduced every year.

After the completion of Dashiqiao 50MW Distributed PV Project, it is estimated that the average annual energy output will be 65,898,000 kWh, and about 20776.325 tons of standard coal can be saved every year. Accordingly, about 55448.95 tons of carbon dioxide (CO<sub>2</sub>), 422.35 tons of sulfur dioxide (SO<sub>2</sub>) and 143.05 tons of nitrogen oxides (NO<sub>X</sub>) can be reduced every year.

The above data shows that the Project helps to improve the local atmospheric environment and promotes energy conservation and emission reduction. In addition, it can also save water and reduce the pollution of the water environment caused by hydraulic ash removal wastewater and warm drainage. Therefore, the PVPS has an obvious environmental benefit.

5.8.2.2 Analysis of impact on water environment

No new facilities such as substations will be built in the Project, and no domestic sewage will be generated during the operating period. The main sewage is the sewage generated during the cleaning of PV panels.

During the operation of the Project, the water quality of PV panel cleaning water is basically the same as that of rainwater, and the main characteristic pollutant is SS, which enters the rainwater ditch through the local rainwater collection and drainage system and will not affect the water environment in the area. The PV panels of the Project are cleaned regularly, and the area of distributed PV panels in each household is not large, resulting in a small amount of cleaning wastewater, which can be consumed by rainwater ditches in surrounding villages.

5.8.2.3 Acoustic environmental impact analysis

The noise during the operating period of the Project mainly comes from the noise generated during the operation of the inverter. According to the feasibility study report of the Project, it is planned to use string inverters in the Project. This type of inverter has a fanless design and does not require a civil engineering room. It can achieve a low

ambient noise of 33dB, and there is basically no noise impact during operation.

#### 5.8.2.4 Solid waste

The solid waste during the operating period of the Project mainly includes waste PV modules, waste inverters, and oily rags that may be generated during repair and maintenance. According to the feasibility study report of the Project, the string inverter to be selected for the Project adopts IP66 protection grade to realize internal and external environmental isolation, keep the device in a stable operating environment, and reduce the impact of external environment such as temperature, sandstorm and salt spray on the service life of the device. The system has no vulnerable parts, no fuses, fans, and other devices that need to be replaced regularly to realize a maintenance-free system, which to a certain extent reduces the generation of solid waste during the operating period.

PV power generation itself does not generate solid waste. The design service life of the PV grid-connected power generation system is 25 years. There is basically no damage except man-made damage. To ensure the stability of the solar power station, the solar panel needs to be replaced during the design period of the system.

According to the project feasibility study report, the 50MW PV project in Baodi District has a total of 92,598 panels, each weighing about 27kg, totaling 2,500.146t. Therefore, the waste PV modules generated within the design life of 25 years are about 2500.146t, which is converted into an average annual waste PV module output of 100.006t. According to the National Hazardous Waste Inventory (2021 Edition), the replaced waste PV modules are not hazardous wastes. The above-mentioned wastes have recycling value and should be collected and temporarily stored in the courtyards of each household, and recycled by the manufacturers.

During the operation of the Project, the waste accessories that may be generated due to damage or replacement after the service life expires will be uniformly recycled by the maintenance team, and no solid waste will be generated.

To sum up, all kinds of solid wastes generated by the Project have been effectively

**\*OFFICIAL USE ONLY** 

treated and disposed of, which will not cause secondary pollution and has little impact on the surrounding environment.

5.8.2.5 Analysis of light pollution impact

According to the feasibility study report of the Project, crystalline silicon PV modules are proposed to be used in the Project. The surface of crystalline silicon plate in the PV modules is coated with anti-reflective coating, and the surface of the encapsulated glass has been subject to anti-reflective treatment, so the reflection of sunlight by PV modules is mainly scattering. Its total reflectivity is far lower than that of glass curtain bar, and there is no glare, so it will not produce light pollution.

5.8.2.6 Analysis of impact of electromagnetic radiation

No new step-up substation or substation will be built in the Project, which will have little impact on the electromagnetic environment in the area.

5.8.2.7 Analysis of impact on ecological environment

As the Project is to install PV modules on the original houses, after the Project is completed and put into operation, it will not change the original structure and function of the local ecosystem, will not have an obvious impact on the species and quantity of animals and plants in the assessment area, and will not have an impact on the stability and diversity of ecosystem types.

## 6. Stakeholder Engagement and Information Disclosure

## 6.1 Identification of Stakeholder

The stakeholders of the Project can be roughly divided into five groups: governments at all levels and relevant institutions in the project area, project implementation institutions and construction units, various groups served by the Project, households providing roof rental for the Project and groups affected by construction. The specific stakeholders are shown in the following table.

#### Identification of Stakeholder

Table	61	1-1
raute	<b>U</b> .1	1-1

Stakeholder groups	Specific stakeholders
Relevant government agencies of the Project	Baodi District and Dashiqiao Municipal Bureau of Planning and Resource Management, Baodi District and Dashiqiao Municipal Housing and Urban-Rural Development Bureau, Baodi District and Dashiqiao Municipal Ecological Environment Bureau as the planning and environmental management units of the Project
Project implementation institutions and construction contractor	Beijing Xiangju New Energy Technology Co., Ltd., Yingkou and Dashiqiao Project Company, Yingkou and Dashiqiao Construction Contractor
Groups served by the Project	SPIC Northeast Electric Power Co., Ltd. Benxi Thermal Power Branch
Households providing roof rental for the Project	About 4,209 farmer households in Baodi District and about 2,500 farmer households in Dashiqiao City plan to rent roofs and
Groups affected by construction	courtyards.

### 6.2 Communication between the Government and State-owned

#### Enterprises

In August 2021, Dashiqiao Municipal People's Government and SPIC Northeast Electric Power Co., Ltd. Benxi Thermal Power Branch signed the *Strategic Cooperation Framework Agreement on Promoting Roof Distributed PV Development in Dashiqiao City*. The agreement specifies that Dashiqiao Municipal People's Government agrees to SPIC Northeast Electric Power Co., Ltd. Benxi Thermal Power Branch's investment in promoting the development of building roofs in Dashiqiao City, including the 100MW rooftop distributed PV project for rural residents.

SPIC Northeast Electric Power Co., Ltd. Benxi Thermal Power Branch and

Yingkou Huirong Electric Power Engineering Co., Ltd. (a subsidiary of Beijing Xiangju New Energy Technology Co., Ltd.) signed the *Strategic Cooperation Agreement for Rooftop PV Power Station Development Project* in April 2022, which clearly states that the Parties agreed to carry out all-round, multi-level and wide-ranging cooperation in the development, construction, investment and general contracting of rooftop distributed PV in Dashiqiao City, Yingkou.

The Project has achieved certain communication results with local governments and investment enterprises, and has been recognized and supported by local governments and investment enterprises, which is conducive to the smooth progress of the Project in the next stage.

### 6.3 Public Participation

#### (1) Investigation method

The public participation methods of the Project include site announcement, sampling and questionnaire.

(2) Investigation respondents

The survey objects of public participation in the Project include the township and subdistrict governments involved in Baodi District of Tianjin and Dashiqiao City of Yingkou City of Liaoning Province and the farmers who meet the construction conditions.

The towns and streets in public participation investigation of the Dashiqiao 50MW Distributed PV Project includes 17 towns and subdistricts in Dashiqiao City, Liaoning Province, namely Jinqiao Subdistrict, Gangdu Subdistrict, Baizhai Subdistrict, Maidu Subdistrict, Shuiyuan Town, Gouyan Town, Shifo Town, Gaokan Town, Qikou Town, Huzhuang Town, Guantun Town, Boluopu Town, Yong'an Town, Tangchi Town, Jianyi Town, Huangtuling Town, and Zhoujia Town.

The towns and streets in public participation investigation of Tianjin Baodi 50MW Distributed PV Project includes 10 towns and subdistricts in Baodi District, Tianjin, namely Chaoyang Subdistrict, Wangbuzhuang Town, Fangjiazhuang Town, Xin'an Town, Huogezhuang Town, Xinkaikou Town, Niudaokou Town, Shigezhuang Town, Haogezhuang Town, and Niujiapai Town.

(3) Content of investigation

The contents of the public opinion survey mainly include the relationship between the affected people and the Project, the main impacts during the construction and operating periods of the Project, the possible social risks of the Project, the measures to be strengthened by the Project, the attitude towards the Project and relevant suggestions. 6.4 Public Opinion Survey Results and Analysis

A total of group questionnaires filled out by 11 towns and subdistricts and 151 individual questionnaires filled out by villagers in 17 towns and subdistricts were collected in Dashiqiao City. A total of group questionnaires filled out by 10 towns and subdistricts and 302 individual questionnaires filled out by villagers in 10 towns and subdistricts were collected in Baodi District. The specific filling statistics are shown in the table below.

# FILLING STATISTICS OF GROUP QUESTIONNAIRE IN DASHIQIAO CITY

## Table 6.4-1

Questions	Answers	Selection of statistics	Proportion (%)
1 The selection shin	May involve long-term lease of space	11	100.00%
1. The relationship between your company	May involve temporary lease of space	0	0.00%
and the Project	No rental space involved	0	0.00%
	Within 100m	11	100.00%
Distance from the Project	Within 100m~500m	0	0.00%
	Beyond 500m	0	0.00%
	Favorable impact	11	100.00%
2. In your opinion, the	Adverse impact	0	0.00%
construction of the Project	No impact	0	0.00%
may bring:	Adverse effects but acceptable	0	0.00%
3. If the project construction leases your company's land, the compensation method you	Rental compensation	11	100.00%
want is:	Miscellaneous	0	0.00%
	Lease compensation	10	90.91%
4. During the project	Traffic impact	1	9.09%
construction stage, the	HSE-compliant construction	11	100.00%
issues that your company	Ecological damage	0	0.00%
is most concerned about	Environmental Protection	3	27.27%
are (multiple choices):	Social Security	0	0.00%
	Miscellaneous	0	0.00%
	Safe operation of the Project	11	100.00%
5. During the project	Physical health of the residents	9	81.82%
operation stage, the issues	Environmental Protection	5	45.45%
you are most concerned	Social Security	0	0.00%
about are:	Miscellaneous	0	0.00%
	People will oppose it	3	27.27%
6. What factors (multiple choices) do you think may	Deteriorating social security environment	0	0.00%
cause public dissatisfaction	Environmental pollution	1	9.09%
or opposition to the	Causing ecological damage	0	0.00%
construction of the Project:	Unreasonable compensation	10	90.91%
	Compensation not paid in full and on	7	63.64%

Questions	Answers	Selection of statistics	Proportion (%)
	time		
	Non HSE-compliant construction	0	0.00%
	Miscellaneous	0	0.00%
	Enhanced environmental and security measures	1	9.09%
7. Do you think the	Development of relevant emergency plans	0	0.00%
relevant measures proposed for the Project are reasonable:	Enhanced communication with stakeholders	11	100.00%
	Strengthening for Construction Management	10	90.91%
	Miscellaneous	0	0.00%
<ol> <li>Your attitude towards the Project after the above preventive measures are</li> </ol>	Supportive	11	100.00%
implemented	Opposed	0	0.00%
·	Indifferent	0	0.00%

FILLING STATISTICS OF INDIVIDUAL QUESTIONNAIRE IN DASHIQIAO

## CITY

## Table 6.4-2

Questions	Answers	Selection of statistics	Proportion (%)
1. Your	May involve long-term lease of space	131	86.75%
relationship with the Project	May involve temporary lease of space	7	4.64%
	No rental space involved	13	8.61%
Distance from	Within 100m	143	94.70%
residence to the	Within 100m~500m	8	5.30%
Project	Beyond 500m	0	0.00%
2. Do you think	Favorable impact	129	85.43%
that the	Adverse impact	3	1.99%
construction of the	No impact	19	12.58%
Project may bring your family:	Adverse effects but acceptable	0	0.00%

Questions	Answers	Selection of statistics	Proportion (%)
3. If the project construction leases your house site, the compensation	Rental compensation	151	100.00%
method you want is:	Miscellaneous	0	0.00%
4. As for the	Lease compensation	147	97.35%
construction of the	<b>Environmental Protection</b>	89	58.94%
Project, the issues	Physical health of the residents	125	82.78%
you are most	Safe operation of the Project	81	53.64%
concerned about	HSE-compliant construction	50	33.11%
are (multiple	Social Security	51	33.77%
choices):	Miscellaneous	0	0.00%
5. The project	People won't oppose it	136	90.07%
construction will	Environmental pollution	106	70.20%
attract the attention of the masses.	Non HSE-compliant construction	90	59.60%
What do you think	Impact on residents' lives	99	65.56%
are the possible	Unreasonable compensation	50	33.11%
reasons (multiple	Disruption of public order	60	39.74%
choices):	Miscellaneous	0	0.00%
	Enhanced environmental and security measures	146	96.69%
6. How do you	Development of relevant emergency plans	97	64.24%
think the Project sponsor should	Enhanced communication with stakeholders	72	47.68%
prevent the possible social risk impact (multiple	Strengthening for Construction Management	93	61.59%
choices):	Compensation for land acquisition according to national and local policies	65	43.05%
	Miscellaneous	0	0.00%
7. Your attitude towards the Project after the above	Supportive	119	78.81%
preventive	Opposed	4	2.65%
measures are implemented:	Indifferent	28	18.54%

# FILLING STATISTICS OF GROUP QUESTIONNAIRE IN BAODI DISTRICT

Table 6.4-3

Questions	Answers	Selection of statistics	Proportion (%)
1. The relationship	May involve long-term lease of space	18	90.00%
between your company	May involve temporary lease of space	0	0.00%
and the Project	No rental space involved	2	10.00%
	Within 100m	20	100.00%
Distance from the Project	Within 100m~500m	0	0.00%
	Beyond 500m	0	0.00%
	Favorable impact	18	90.00%
2. In your opinion, the	Adverse impact	0	0.00%
construction of the Project	No impact	1	5.00%
may bring:	Adverse effects but acceptable	1	5.00%
3. If the project construction leases your company's land, the compensation method you	Rental compensation	20	100.00%
want is:	Miscellaneous	0	0.00%
	Lease compensation	9	45.00%
4. During the project	Traffic impact	1	5.00%
construction stage, the	HSE-compliant construction	16	80.00%
issues that your company	Ecological damage	1	5.00%
is most concerned about	Environmental Protection	2	10.00%
are (multiple choices):	Social Security	0	0.00%
	Miscellaneous	1	5.00%
	Safe operation of the Project	20	100.00%
5. During the project	Physical health of the residents	10	50.00%
operation stage, the issues	Environmental Protection	2	10.00%
you are most concerned	Social Security	0	0.00%
about are:	Miscellaneous	0	0.00%
	People won't oppose it	14	70.00%
6. What factors (multiple choices) do you think may	Deteriorating social security environment	0	0.00%
cause public	Environmental pollution	0	0.00%
dissatisfaction or	Causing ecological damage	0	0.00%
opposition to the	Unreasonable compensation	6	30.00%
construction of the Project:	Compensation not paid in full and on time	7	35.00%

Questions	Answers	Selection of statistics	Proportion (%)
	Non HSE-compliant construction	2	10.00%
	Miscellaneous	0	0.00%
	Enhanced environmental and security measures	16	80.00%
7. Do you think the	Development of relevant emergency plans	4	20.00%
relevant measures proposed for the Project are reasonable:	Enhanced communication with stakeholders	3	15.00%
	Strengthening for Construction Management	1	5.00%
	Miscellaneous	0	0.00%
8. Your attitude towards the Project after the above preventive measures are	Supportive	18	90.00%
implemented	Opposed	0	0.00%
_	Indifferent	2	10.00%

FILLING STATISTICS OF INDIVIDUAL QUESTIONNAIRE IN BAODI

## DISTRICT

Questions	Answers	Selection of statistics	Proportion (%)
1 Vour relationship	May involve long-term lease of space	293	97.02%
1. Your relationship with the Project	May involve temporary lease of space	0	0.00%
	No rental space involved	9	2.98%
Distance from	Within 100m	285	94.37%
residence to the	Within 100m~500m	17	5.63%
Project	Beyond 500m	0	0.00%
2. Do you think	Favorable impact	283	93.71%
that the	Adverse impact	0	0.00%
construction of the	No impact	19	6.29%
Project may bring your family:	Adverse effects but acceptable	0	0.00%

Questions	Answers	Selection of statistics	Proportion (%)	
3. If the project				
construction leases				
your house site, the	Rental compensation	302	100.00%	
compensation				
method you want				
is:	Miscellaneous	0	0.00%	
4. As for the	Lease compensation	282	93.38%	
construction of the	<b>Environmental Protection</b>	3	0.99%	
Project, the issues	Physical health of the residents	51	16.89%	
you are most	Safe operation of the Project	190	62.91%	
concerned about	HSE-compliant construction	43	14.24%	
are (multiple	Social Security	0	0.00%	
choices):	Miscellaneous	0	0.00%	
5. The project	People won't oppose it	60	19.87%	
construction will	Environmental pollution	14	4.64%	
attract the attention	Non HSE-compliant	22	7.200/	
of the masses.	construction	22	7.28%	
What do you think	Impact on residents' lives	194	64.24%	
are the possible	Unreasonable compensation	238	78.81%	
reasons (multiple	Disruption of public order	1	0.33%	
choices):	Miscellaneous	0	0.00%	
	Enhanced environmental and	2(2	86.75%	
	security measures	262	80.75%	
	Development of relevant	0	0.00%	
6. How do you	emergency plans	0	0.00%	
think the Project	Enhanced communication with	223	73.84%	
sponsor should prevent the	stakeholders	223	/3.8470	
possible social risk	Strengthening for Construction	27	8.94%	
impact (multiple	Management	27	0.9470	
choices):	Compensation for land			
	acquisition according to	49	16.23%	
	national and local policies			
	Miscellaneous	0	0.00%	
7. Your attitude				
towards the Project	Supportive	302	100.00%	
after the above			ļ	
preventive	Opposed	0	0.00%	
measures are	Indifferent	0	0.00%	
implemented:	the regults of public opinion a			

(1) Analysis of the results of public opinion survey in Dashiqiao City

(1) Analysis of statistical results of group questionnaire

A total of 11 towns and subdistricts in Dashiqiao City have filled in the group questionnaire, and all involve the long-term lease of the site. All 11 towns and subdistricts believe that the Project will bring beneficial impacts and require lease compensation in the form of rent.

For the impact of the project construction, the main concerns of each town and subdistrict in the construction stage include HSE-compliant construction (accounting for 100%), lease compensation (accounting for 90.91%), environmental protection (accounting for 27.27%) and traffic impact (accounting for 9.09%). Therefore, HSE-compliant construction shall be strengthened during the construction period of the Project, attention shall be paid to construction safety, and the impact of construction on the production and life of surrounding farmers shall be minimized; fully communicate and agree with farmers on lease compensation in a timely manner and sign lease agreements to avoid lease disputes; effectively implement environmental protection measures to minimize the impact of construction on the surrounding environment; strengthen construction management to avoid inconvenience caused by construction traffic jam.

For the impact of the project operation stage, the main concerns of the towns and subdistricts include safe operation of the Project (accounting for 100%), physical health of residents (accounting for 81.82%) and environmental protection (45.45%). Therefore, attention should be paid to maintaining the normal and safe operation of the PVPS during the operation period of the Project to avoid safety accidents such as electric leakage and falling objects. Environmental protection measures during the operation period should be strengthened to minimize adverse environmental impacts during the operation period.

Regarding the factors that may cause social risks, the main factors considered by the towns and subdistricts include unreasonable compensation (accounting for 90.91%), delayed payment of compensation (accounting for 63.64%) and environmental pollution (accounting for 9.09%). Therefore, the sponsor of the Project shall strengthen the communication with farmers, and actively communicate with farmers to reach an agreement on the compensation amount, payment method, payment time and other issues to avoid lease disputes.

Regarding the main measures to be proposed for the Project, the main measures

advocated by the towns include strengthening communication with stakeholders (accounting for 100%) and strengthening construction management (accounting for 90.91%). Therefore, attention should be paid to strengthening the disclosure of project information and establishing a sound GRM for affected people to ensure that the demands of stakeholders are coordinated and settled in a timely manner.

Finally, 11 towns and subdistricts supported the construction of the Project.

2 Analysis of statistical results of individual questionnaire

151 farmers in 17 towns and subdistricts involved in the Project in Dashiqiao City filled in the individual questionnaire of the Project, of which 131 people may be involved in the long-term lease of the site, 13 people may not be involved in the lease of the site, and 7 people may be involved in the temporary lease of the site; 143 people are within 100m from the Project, and 8 people are within 100m~500m from the Project. The majority of farmers believe that the Project will have a favorable impact (accounting for 85.43%) or no impact (accounting for 12.58%). All farmers agreed on lease compensation for their house site in the form of rent.

Regarding the problems brought by the project construction, the main concerns of the relevant farmers in Dashiqiao City are lease compensation (accounting for 97.35%), physical health of residents (accounting for 82.78%), environmental protection (accounting for 58.84%), safe operation of the Project (accounting for 53.64%), social security (accounting for 33.77%) and HSE-compliant construction (accounting for 33.11%).

As for the causes of community impact caused by the Project, the relevant farmers in Dashiqiao City believe that the possible causes include environmental pollution (70.2%), impact on residents' lives (65.56%), non HSE-compliant construction (59.60%), disturbance of public security (39.74%) and unreasonable compensation (33.11%).

As for the measures to be strengthened by the sponsor, relevant farmers in Dashiqiao City believe that environmental protection and security measures should be strengthened (accounting for 96.69%), relevant disposal plans should be formulated (accounting for 64.24%), construction management should be strengthened (accounting for 61.59%), communication with stakeholders should be strengthened (accounting for 47.68%), and fair and transparent compensation for utilizing the rooftop or courtyard (accounting for 43.05%), etc.

Therefore, the construction of the Project should strengthen the communication of lease compensation, strengthen the disclosure of project information and the popularization of relevant knowledge, effectively implement various environmental protection measures, and ensure the safe operation and HSE-compliant construction of the Project.

Finally, most of the farmers (accounting for 78.81%) believe that they support the construction of the Project. There are still a few farmers (accounting for 18.54%) who held indifferent attitudes towards the construction of the Project, and a very small number (accounting for 2.65%) of farmers opposed the construction of the Project. In general, the construction of the Project is basically supported by local farmers.

- (2) Analysis of the results of public opinion survey in Baodi District
- ① Analysis of statistical results of group questionnaire

The Project involves 10 towns and subdistricts in Baodi District, and 2 villages are sampled from each town and subdistrict for a sampling group questionnaire survey. Of all the 20 villages surveyed, 18 involve long-term lease of site and 2 do not involve site lease. A total of 18 surveyed villages believe that the Project will bring beneficial effects, 1 surveyed village believes that the Project has no impact, and 1 surveyed village believes that the Project has adverse effects but is acceptable. All the villages surveyed require lease compensation in the form of rent.

For the impact of the project construction, the main concerns of each town and subdistrict in the construction stage include HSE-compliant construction (accounting for 80%), lease compensation (accounting for 45%) and environmental protection (accounting for 10%). Therefore, HSE-compliant construction shall be strengthened during the construction period of the Project, attention shall be paid to construction safety, and the impact of construction on the production and life of surrounding farmers shall be minimized; fully communicate and agree with farmers on lease compensation in a timely manner and sign lease agreements to avoid lease disputes; effectively implement environmental protection measures to minimize the impact of construction on the surrounding environment; strengthen construction management to avoid inconvenience caused by construction traffic jam.

For the impact of the project operation stage, the main concerns of the towns and subdistricts include safe operation of the Project (accounting for 100%), physical health of residents (accounting for 50%) and environmental protection (10%). Therefore,

attention should be paid to maintaining the normal and safe operation of the PVPS during the operation period of the Project to avoid safety accidents such as electric leakage and falling objects. Environmental protection measures during the operation period should be strengthened to minimize adverse environmental impacts during the operation period.

Regarding the factors that may cause social risks, the main factors considered by the towns and subdistricts include delayed payment of compensation (accounting for 35%), unreasonable compensation (accounting for 30%) and non HSE-compliant construction (accounting for 10%). Therefore, the sponsor of the Project shall strengthen the communication with farmers, and actively communicate with farmers to reach an agreement on the compensation amount, payment method, payment time and other issues to avoid lease disputes.

As for the main measures to be proposed for the Project, the main measures advocated by each town include strengthening environmental protection and security measures (accounting for 80%), formulating relevant disposal plans (accounting for 20%), and strengthening communication with stakeholders (accounting for 15%), etc. Therefore, attention should be paid to implementing various environmental protection and security measures, strengthening the disclosure of project information and establishing a sound GRM for affected people to ensure that the demands of stakeholders are coordinated and settled in a timely manner.

Finally, 18 surveyed villages support the construction of the Project, while 2 surveyed villages do not care about the construction of the Project. Among them, the 18 surveyed villages that may be involved in the Project all support the construction of the Project.

2 Analysis of statistical results of individual questionnaire

302 farmers from 10 towns and subdistricts involved in the Project in Baodi District filled in the individual questionnaire of the Project, of which 293 may be involved in the long-term lease of the site and 9 do not involve the lease of the site; 285 are within 100m from the Project and 17 are within 100-500m from the Project. The majority of farmers believe that the Project will have a favorable impact (accounting for 93.71%) or no impact (accounting for 6.29%). All farmers agreed on lease compensation for their house site in the form of rent.

Regarding the problems brought by the project construction, the main concerns of

relevant farmers in Dashiqiao City are lease compensation (accounting for 93.38%), safe operation of the Project (accounting for 62.91%), physical health of residents (accounting for 16.89%) and HSE-compliant construction (accounting for 14.24%).

As for the causes of negtive social impacts that may be caused by the Project, the relevant farmers in Dashiqiao City think that the possible causes include unreasonable compensation (accounting for 78.81%), impact on residents' lives (accounting for 64.24%), non HSE-compliant construction (accounting for 7.28%), environmental pollution (accounting for 4.64%), etc.

As for the measures to be strengthened by the sponsor, relevant farmers in Dashiqiao City believe that environmental protection and security measures should be strengthened (accounting for 86.75%), communication with stakeholders should be strengthened (accounting for 73.84%), fair and transparenct compensation for utilizing the rooftop or courtyard(accounting for 16.23%), and construction management should be strengthened (accounting for 8.94%), etc.

Therefore, the construction of the Project should strengthen the communication of lease compensation, strengthen the disclosure of project information and the popularization of relevant knowledge, effectively implement various environmental protection measures, and ensure the safe operation and HSE-compliant construction of the Project.

Finally, all farmers support the construction of the Project.

### 6.5 Project information disclosure

The ESIA information of the Project were disclosed on site. On June 8, 2022, the project sponser posted the ESIA information on the Project in Jinqiao Subdistrict, Gangdu Subdistrict, Baizhai Subdistrict, Meidu Subdistrict, Shuiyuan Town, Gouyan Town, Shifo Town, Gaokan Town, Qikou Town, Huzhuang Town, Guantun Town, Boluopu Town, Yong'an Town, Tangchi Town, Jianyi Town, Huangtuling Town and Zhoujia Town of Dashiqiao City, Liaoning Province, as well as Chaoyang Subdistrict, Wangbuzhuang Town, Fangjiazhuang Town, Xin'an Town, Huogezhuang Town, Xinkaikou Town, Niudaokou Town, Shiguzhuang Town and Niujiapai Town of Baodi District, Tianjin. The information publicity is as follows. See Annex 3 for details of publicity of ESIA information.

The disclosure of ESIA information mainly includes the introduction of basic information about construction projects, the significance of project construction, the groups involved in project implementation, the main contents of ESIA, the main contents of soliciting public opinions, and the main ways of soliciting public opinions. The contact persons and contact information of the project sponsor and the assessment unit are specified in the publicity as the grievance channels for the affected people. The affected people can express their opinions and demands on the Project by telephone or email.

As of June 22 (two weeks after the publicity was posted), the project sponsor and the assessment unit have not received the opinions and demands of the affected people on the Project.



102









Liuhuangzhuang Village, Fangjiazhuang Town, Baodi District







Zhaijiashen Village, Niudaokou Town, Baodi District







Zhuliuzhuang Village, Shigezhuang Town, Baodi District




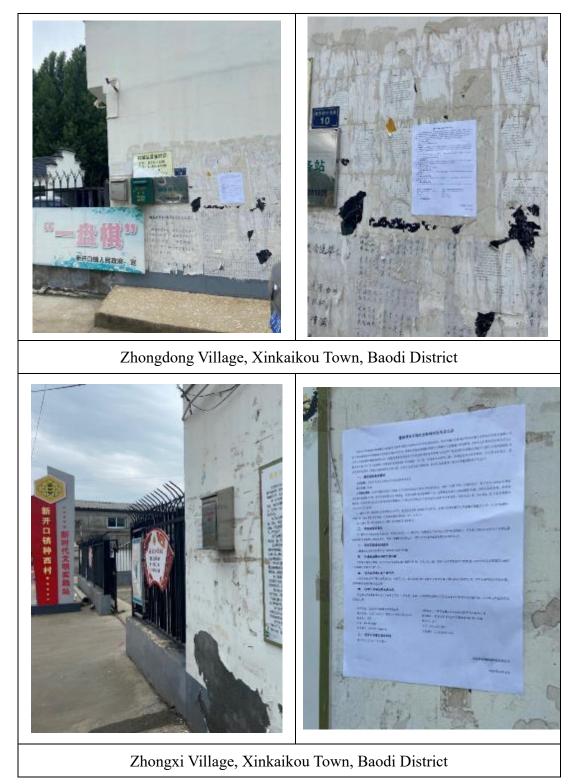



Figure 6.5-1 Site Photo of ESIA Information Publicity in Baodi District



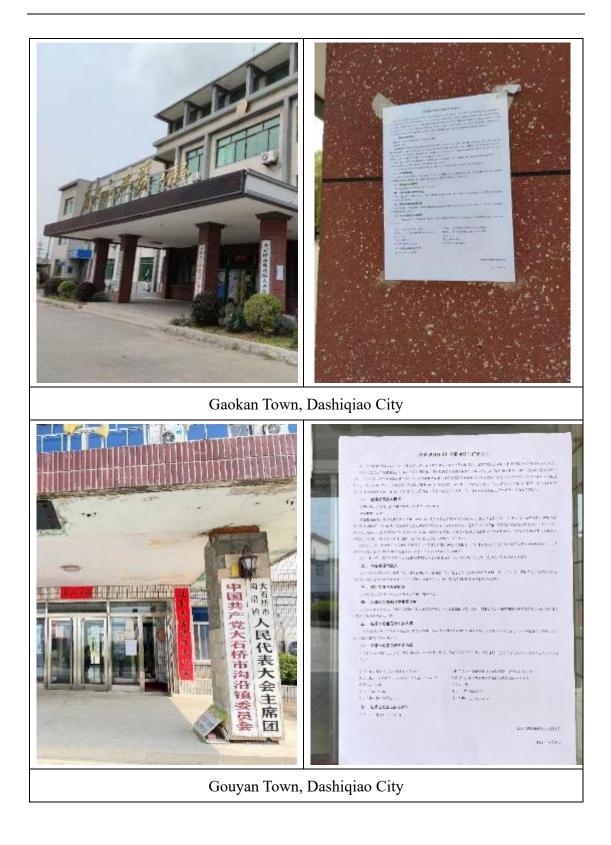

Huzhuang Town, Dashiqiao City



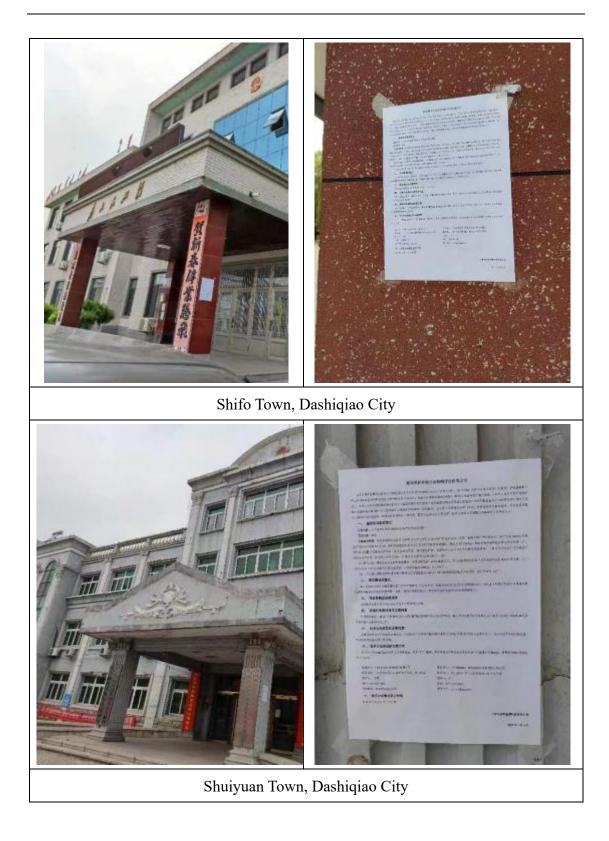

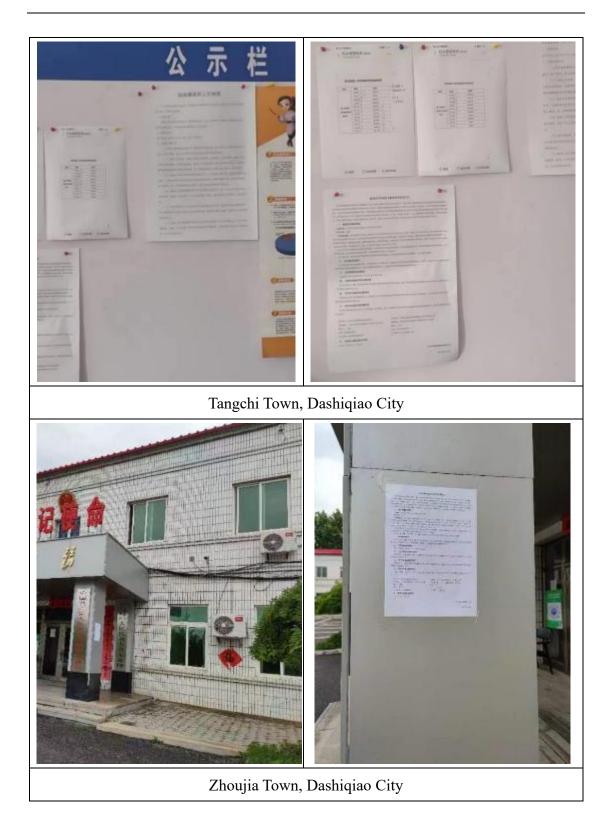




Figure 6.5-2 Publicity of ESIA Information in Dashiqiao City

## 7. Establishment and Management of GRM

#### 7.1 Establishment of GRM

In accordance with the requirements of the Bank's *Environmental and Social Framework*, the Project has established an appropriate GRM in accordance with the environmental and social policies and environmental and social standards, so as to understand and help those affected groups raise concerns, complaints and grievances in terms of rent compensation and construction-related environmental and social impacts of the Project, and ensure that relevant interest groups that may be negatively affected can use the GRM to safeguard their rights and interests.

(1) Establishment of the GRM Team

Beijing Xiangju New Energy Technology Co., Ltd. will take the lead to establish a GRM team at the level of the project company, including the Project Contractor, Construction Contractor and Supervisor. Clarify the main body and division of responsibility and cooperation department for grievance handling of the Project, and implement the responsibility for grievance handling to individuals. In the process of work promotion, the communication and coordination mechanism between government departments at all levels and village committees and villagers shall be established.

Establish a hierarchical GRM. Grievances that cannot be resolved at the level of the Project Working Team should be further appealed to Beijing Xiangju New Energy Technology Co., Ltd. or the Bank.

Considering that people in China are used to lodging grievances with relevant government departments, the working team shall jointly establish a grievance handling working team with the township government to actively respond to people's demands related to the Project. With the support from related functional departments of Dashiqiao City and Baodi District, the sponsor, Constructor and Construction Contractor will set up a compliant handling working team with the responsible person and permanent staff, to take charge of the compliant handling work of the Project; moreover, the team shall be staffed with township compliant handling personnel with experience of contradictory resolving.

#### (2) Contents of grievance handling

It is recommended that the compliant handling working team should carry out work from the following aspects:

(1) Establish a reception point on the construction site to accept residents visited. The compliant handling team shall set up fixed visitor reception points to patiently and carefully answer the questions put forward by visited residents on concerned planned site selection, construction scheme and environmental protection, and timely discuss and reply to the comments & demands proposed by the visitors.

<sup>(2)</sup> Communicate/exchange with villagers, learn their opinions, suggestions and demands, and to timely communicate with related departments for answers through the communication platform built by the township and subdistrict governments.

<sup>(3)</sup> Keep close contact with governments at all levels and know the dynamic state of residents; for possible social contradictions and risky events, to assist related departments of the government to take preventive and disposal measures, to prevent contradiction expansion and sharpening, and to prevent minor group events from transforming into major and great group events.

(4) Strengthen the contact with the project approval departments such as Baodi District and Dashiqiao Municipal Political and Legal Affairs Commission, Development and Reform Bureau, Construction Bureau, Transportation Bureau, Bureau of Planning and Resource Management, Bureau of Land and Resources, Bureau of Ecological Environment, etc., and invite the project approval departments to jointly answer the relevant questions and policies concerned by the masses as required.

(5) Strengthen the contact with the safety supervision department, etc. to complete the construction quality and safety management work. Timely report the comments on construction from enterprises and public institutions and residents near the Project to the Contractor, Construction Contractor and Supervisor, and assist related departments and offices to pacify and compensate the affected residents and enterprises.

<sup>(6)</sup> Make a compensation plan for project construction influence, and well pacify and compensate the residents living in surrounding areas suffered a lot from noise, vibration and flying dust according to the demands of phased work of complaint handling; proper compensation means shall be taken to avoid causing new

#### contradictions.

⑦ The records and results of all oral or written grievances shall be reported to the Bank in the annual environmental and social report.

#### 7.2 Early Grievances of the Project

On June 8, 2022, the project sponsor posted the publicity of ESIA information on the Project in Jinqiao Subdistrict, Gangdu Subdistrict, Baizhai Subdistrict, Meidu Subdistrict, Shuiyuan Town, Gouyan Town, Shifo Town, Gaokan Town, Qikou Town, Huzhuang Town, Guantun Town, Boluopu Town, Yong'an Town, Tangchi Town, Jianyi Town, Huangtuling Town and Zhoujia Town of Dashiqiao City, Liaoning Province, as well as Chaoyang Subdistrict, Wangbuzhuang Town, Fangjiazhuang Town, Xin'an Town, Huogezhuang Town, Xinkaikou Town, Niudaokou Town, Shiguzhuang Town and Niujiapai Town of Baodi District, Tianjin. During the construction and operation periods of the Project, the project progress information shall be regularly publicized in the above-mentioned villages and towns to ensure that the affected people can timely and effectively give feedback on their demands during the construction and operation periods of the Project, and timely communicate and deal with them to prevent social impact disputes.

The contact persons and contact information of the project sponsor and the assessment unit are specified in the publicity as the appeal channels for the affected people. The affected people can feed back their opinions and demands on the Project by telephone or email. As of June 22 (two weeks after the publicity was posted), the project sponsor and the assessment unit have not received the opinions and demands of the affected people on the Project.

During the construction and operation of the Project, the grievance records and handling of the Project shall be sorted out on a quarterly basis, and the key issues, handling methods, and handling progress shall be publicized and posted on the bulletin board of the township government involved in the Project for stakeholders to read.

# 8. Environmental and Social Management Measures

#### 8.1 Protection of the Rights and Interests of Farmers

Strengthen project management and safety control, and avoid disputes such as arrears of farmers' rent settlement.

(1) Early warning guarantee for rent payment

The project sponsor shall put forward lease management requirements for each project company, and formulate a lease dispute settlement system, which shall be supervised and managed by the Project sponsor, and urge the project company to establish an early warning and guarantee system for rent payment. The early warning and guarantee system of rent payment can effectively prevent the occurrence of rent arrears, improve the rental management system and solve rental disputes.

(2) Emergency plan for failure to pay rent normally

After the implementation of the rent payment warning measures, if the contract still fails to pay the rent normally, consider using the PV power generation on-grid income to directly compensate the farmers.

(1) Feasibility analysis of power generation compensation for distributed PV project in Baodi district

The average annual energy output of the distributed PV project in Baodi District within 25 years of operation will be 68,780,800kWh. There are about 4,209 farmers contracted for the Project, and the average annual energy output of each household is about 16,300 kWh. If the electricity price is calculated as RMB 0.3655/kwh, the annual average household power generation compensation amount is about RMB 5,957, which is greater than the average annual household rent of RMB 1,500. Therefore, the power generation compensation method adopted in the Project can meet the rent payment of farmers.

② Feasibility analysis of power generation compensation for distributed PV project in Dashiqiao City

The average annual energy output of the distributed PV project in Dashiqiao City within 25 years of operation will be 65.898 million kWh. There are about 2,500 farmer

households contracted for the Project, and the average annual power generation is about 26,400kWh per household. If the electricity price is calculated as RMB 0.3655/kwh, the annual average household power generation compensation amount is about RMB 9634, which is greater than the average annual household rent of RMB 2500. Therefore, the power generation compensation method adopted in the Project can meet the rent payment of farmers.

With compensation by power generation of the Project, the competent department of the local government shall coordinate in time, organize the representatives of the project sponsor and farmers to have a discussion, and communicate the payment of rent, subsequent lease payment plan and other matters.

#### 8.2 Protection of Population Health

(1) Hygiene cleaning in the construction area

During the project preparation period, the construction site and the places where workers are concentrated shall be cleaned and disinfected at one time.

(2) Health and epidemic prevention of workers

The Construction Contractor and the project management department in the construction area shall specify the person responsible for health and epidemic prevention. The health and epidemic prevention work within the scope of management can be carried out by broadcasting, wall newspaper, printing and distributing brochures and other forms to publicize and educate the food hygiene of workers, so as to improve their health awareness of self-prevention of diseases.

The workers shall be subject to health quarantine before entering the site. According to the disease composition and epidemic situation of the workers' origin, the proposed inspection items shall be sampled for inspection, with a sampling rate of 20%. Patients with infectious diseases are not allowed to enter the construction team to prevent mutual infection and epidemic among the construction population. If a new infectious disease is found, the patient must be isolated for treatment, the transmission channel shall be cut off, and the health records of workers shall be established.

The health conditions of workers shall be sampled once a year, with a sampling

rate of 10%. The examination contents include: general health physical examination, routine examination, malaria, hepatitis B and infectious hepatitis and other special examinations, and corresponding special examinations can be made for special groups. If an epidemic trend of diseases is found, the number of examination personnel should be expanded and corresponding treatment measures should be taken. For diseases that are harmful and easy to prevail in the construction area, preventive medication, immunization and other methods can be adopted to improve the resistance of workers to the disease and prevent the spread of disease.

(3) Sanitary facilities in the construction area

The Construction Contractor shall set up a medical point in the living area, provide commonly used therapeutic drugs, carry out simple treatment and emergency treatment of work-related accidents, and be responsible for health and epidemic prevention during the construction period.

(4) Health propaganda and management

Strengthen the health propaganda and management in the construction area. The contractors and the construction management unit shall designate a dedicated person and make use of various forms such as blackboard newspapers, wall newspapers and publicity pictorials to publicize prevention and treatment knowledge and planned immunoprophylaxis and vaccination knowledge for infectious diseases such as tuberculosis, hepatitis B, mumps, dysentery and influenza, and improve the level of hygienic knowledge and awareness of health protection for persons in the construction area.

#### 8.3 HSE-compliant Construction Management

(1) Ensure legal and compliant construction and HSE-compliant construction. Beijing Xiangju New Energy Technology Co., Ltd. shall coordinate with the Construction Contractor to sign an HSE-compliant construction agreement with the town government where the construction section is located to clarify the responsibility requirements. At the same time, an assessment system for HSE-compliant construction shall be established, and a certain proportion of expenses shall be arranged as reward

\*OFFICIAL USE ONLY

and punishment funds to strictly rectify those failing to meet the standards for HSEcompliant construction.

(2) Establish and improve the construction supervision and management system. The monthly assessment shall be implemented. The Project sponsor shall employ the management personnel with certain experience from the town government as the HSEcompliant construction management supervisor to carry out supervision and management according to the requirements of HSE-compliant construction management in Liaoning Province and Tianjin Municipality to ensure the implementation of various environmental protection measures and reduce the impact of construction noise, vibration, dust and muck. The Construction Contractor can leave the construction site only after the Project of this section meets the requirements of "three simultaneities" of environmental protection. In terms of construction organization, the construction site boundary shall be reasonably determined, engineering materials and machinery shall be stacked at designated places, and transport vehicles shall be driven according to the prescribed route; the operation time shall be reasonably arranged to avoid night construction as far as possible; if night construction is necessary, the construction permit shall be handled according to the provincial and municipal management measures, and relevant regulations and requirements shall be implemented.

(3) Repair (compensate) the facilities damaged by construction in time. Roads, bridges, canals and underground pipelines damaged during construction shall be repaired by the Construction Contractor in time. If they are not repaired in time, the Project sponsor shall be responsible for handling them. If other surrounding facilities are damaged during construction, the Project sponsor shall be responsible for organizing relevant responsible units to make compensation.

(4) Strengthen HSE-compliant construction, and carry out site leveling and reclamation in time according to the original land use type after the completion of temporary land borrowing construction such as temporary access roads.

(5) Strengthen the management of workers and establish a management system for workers to avoid conflicts between them and surrounding residents.

(6) Establish a platform for communication between the Construction Contractor and residents. During the construction period, the Construction Contractor must establish a platform for communication with the surrounding residents, set up a special organization to communicate with the residents, and properly handle the social conflicts caused by the construction in a timely manner.

#### 8.4 Information Disclosure and Communication

Stakeholders of the Project mainly include the project construction subject (Beijing Xiangju New Energy Technology Co., Ltd.), farmers directly contracted with the Project and government agencies in the project site. Therefore, the information disclosure and communication objects of the Project mainly include the farmers involved in the Project and the government agencies where the Project is located.

(1) Information disclosure and communication to farmers involved in the Project

Prepare unified publicity and explanation materials, distribute them to all farmers involved in the Project and carry out publicity and explanation. The key points of the publicity and answer materials include the necessity of project construction, construction scheme, construction progress, control scheme of environmental impact factors such as noise and light and shadow during project construction and operation, and traffic organization scheme during construction.

The project construction communication and coordination meeting shall be held at the right time before the Project starts, during the project construction and during the project operation. In addition to individual answers for the masses during the handling of letters, visits and other complaint work, it is suggested to hold a mass communication and coordination promotion meeting for project construction before some important nodes such as project scheme publicity and project construction, so as to focus on publicizing and explaining various questions concerned by the masses, and timely study and answer unexpected questions raised by residents.

(2) Information disclosure and communication to local government agencies

Strengthen the communication with the local government of the city, town, subdistrict and village where the project is located, try to avoid disputes, and invite governments at all levels and relevant departments to guide and participate in the social

risk prevention and resolution of the Project, further rely on local grassroots organizations along the line, and do a good job in risk resolution patiently, carefully and persistently. For example, the petitioning departments at all levels respond to and guide the petitioners who have opinions, coordinate and implement the emergency handling plan for social risks, and publicize and educate the grassroots. Including strengthening project management and safety control to avoid disputes such as wage arrears. Regularly visit the municipal, township, subdistrict and village local governments where the Project is located, and timely obtain the suggestions of the local governments on the Project as an important decision-making basis to guide the construction and operation of the Project.

#### 8.5 Environmental Protection Measures during Construction Period

(1) Ambient air protection measures

(1) Reasonable management shall be carried out on the construction site, equipment and installation materials shall be stacked in a unified manner, covered with tarpaulin, and handling links shall be minimized.

<sup>(2)</sup> The transport vehicles shall be in good condition and in strict accordance with the relevant regulations of muck management. The transport vehicles shall not be overloaded. During the construction process, the pavement on which the vehicles are running shall be sprayed with water to suppress dust. Materials prone to dust shall be covered with tarpaulin during transportation, the tires shall be washed, and water shall be sprayed regularly to reduce dust during transportation. At the same time, special personnel shall be assigned to carry out road cleaning and HSE-compliant construction inspection in the construction area every day.

③ When the wind is too strong, the construction operation shall be stopped, and covering measures shall be taken for building materials such as stacking materials that are easy to generate dust.

④ The welding work during the construction of the Project may be carried out outdoors, and the fumes generated by welding may be directly discharged into the atmosphere, but the welding amount is small and the surrounding diffusion conditions are good. The welding fumes have little impact on the surrounding atmospheric environment.

(2) Water environment protection measures

The construction content of the Project is relatively small. No construction living area will be set up during the construction period. The domestic wastewater generated by the workers will be solved by relying on the original wastewater treatment system of the surrounding villages. The office area relies on the original permanent office building of the Project, and the domestic sewage is incorporated into the municipal pipe network for treatment.

Since there is basically no production wastewater during the construction of

distributed PV projects, only a small amount of construction vehicle washing wastewater is generated, and the main pollutant in the wastewater is only a small amount of SS. Vehicle washing tanks and sedimentation tanks shall be set up in the main construction area of the Project to wash the vehicles entering and leaving the construction site, so as to prevent the vehicles from bringing dust into the social roads. After sedimentation, the wastewater from vehicle washing can be reused as construction water or for spraying for dust suppression. The sediment shall be dried in a certain area on the construction area, and then transported to the designated place for soil covering. In addition, commercial concrete is adopted during the construction period of the Project, and no large-scale concrete mixing is carried out on site.

(3) Acoustic environmental protection measures

The Project sponsor shall strictly implement the Noise Emission Standard for Construction Field Boundary (GB12523-2011) during the construction process, and take effective noise reduction measures as far as possible to avoid the concentrated use of a large number of power mechanical equipment at the same time. The construction equipment shall be arranged as far away from sensitive points as possible, and the control of construction noise shall be strengthened to minimize the impact of construction on the surrounding environment and sensitive targets. Protection measures against noise during construction;

(1) During the construction process, the Construction Contractor shall strictly implement the relevant provisions of the Noise Emission Standard for Construction Field Boundary (GB12523-2011) to avoid construction disturbances.

② Reasonable layout of construction site: Arranging a large number of power mechanical equipment at the same location shall be prevented to avoid excessive local sound level.

③ Reasonable arrangement of construction time: The Construction Contractor shall reasonably arrange the construction time to avoid night construction, so as not to affect the rest of nearby residents.

(4) Low-noise equipment shall be selected for selection of construction machinery, and enclosed operation sheds shall be set up for high-noise machinery to reduce noise diffusion.

<sup>(5)</sup> The noise generated by construction machinery is often sudden, irregular, discontinuous and highly intense. The Construction Contractor shall adopt the method of reasonably arranging the operation time of construction machinery to mitigate it, reduce the number of high-noise construction machinery operating at the same time, and minimize the superimposed impact of sound sources.

<sup>(6)</sup> For noise sources such as material transportation, knocking and human shouting during the construction period, the Construction Contractor is required to carry out HSE-compliant construction and strengthen effective management to mitigate its impact.

(7) The Owner is required to indicate the complaint number on the construction site. Once receiving the complaint, the Owner shall contact the local environmental protection department in time to deal with the environmental dispute in time.

<sup>(8)</sup> The height of the fencing in the construction area is determined according to the height of the surrounding sensitive targets.

After the above measures are taken, the construction noise of the Project will have little impact on the surrounding sensitive points.

(4) Prevention measures for solid waste

(1) Waste parts generated during installation mainly include waste such as residual materials of cables and leftover materials of section steel brackets. Classify, collect, and recycle in a timely manner.

<sup>(2)</sup> During the construction, a relatively fixed garbage collection point shall be selected at a reasonable position, and a small amount of domestic garbage shall be collected through the sanitation facilities of nearby villages or cooperative enterprises, and transported and treated by the sanitation department in a unified manner.

8.6 Environmental Protection Measures during Operation

(1) Protective measures for water environment

No domestic sewage will be generated during the operation period of the Project; the cleaning water of PV modules can be collected and treated through local rainwater ditches.

(2) Acoustic environmental protection measures

When ordering the equipment, put forward the noise limit requirements for the equipment, and set up sound insulation measures for inverters and other equipment to make their noise meet the relevant requirements.

(3) Solid waste protection measures

During the operation period of the Project, no domestic waste will be generated. Waste PV modules will be temporarily stored in the courtyards of farmers and regularly recycled by equipment manufacturers. The components and parts (such as inverters) replaced during the maintenance during the operation period shall be recycled by the maintenance team.

9. Environmental and Social Monitoring Plan

#### 9.1 Environmental Protection Management Plan

Including environmental management system and environmental supervision system.

(1) Environmental management and supervision during construction

According to the Environmental Protection Law of the People's Republic of China and the Measures for the Administration of Environmental Protection in the Power Industry and relevant regulations, the environmental management and environmental monitoring plan of the Project is formulated, and the measures during the construction period are as follows:

(1) The Construction Contractor of the Project shall formulate the environmental management and supervision measures to be taken according to the requirements of the Project sponsor;

2) The engineering management department of the Project shall assign special personnel for inspection.

(2) Environmental management and supervision during operation

According to the environmental characteristics of the project area, an environmental management department must be set up, equipped with at least 1

corresponding professional management personnel (part-time). The functions of this department are:

(1) Formulate and implement various environmental supervision and management plans;

(2) Regularly check the operation of environmental protection treatment facilities and deal with the problems in time;

③ Coordinate and cooperate with the possible environmental investigation and other activities carried out by the superior competent department of ecological environment;

(4) The environmental protection measures and facilities of the Project must be designed, constructed and put into operation simultaneously with the Project.

#### 9.2 Environmental Monitoring Plan

In order to establish a file on the impact of the Project on the environment, the impact of project implementation on the surrounding environment shall be monitored or investigated. The monitoring content includes:

(1) Monitoring items: noise.

(2) Monitoring points: representative environmentally sensitive targets in the construction area of Dashiqiao City and Baodi District.

(3) Monitoring time: during completion acceptance and when there are complaints.9.3 Social Monitoring Plan

During the construction and operation of the Project, the social impact of the Project shall be regularly monitored.

(1) Project grievance and feedback monitoring

The grievance channels of the Project mainly include the GRM team (Project Contractor, Construction Contractor and Supervisor), Beijing Xiangju New Energy Technology Co., Ltd. and the Bank. The project grievance team shall regularly report to Beijing Xiangju New Energy Technology Co., Ltd. and the Bank on the grievances from various channels, the handling of grievances, and the follow-up feedback on grievances.

(2) Monitoring of project rental income

The Project shall timely monitor the rental income brought to villagers during the project development and before the overall transfer, and track and monitor the social benefits of the Project. The main indicators to be monitored include: ① the number of farmers who receive benefits from the Project; ② the amount of annual rent per household from the Project; ③ the number of women who directly receive rent benefits from the Project.

# 10. Analysis of Environmental, Social and Economic Gain and Loss10.1 Analysis of Social, Economic and Environment Effects

As the world energy issues rank first among the top ten hot issues in the world, especially with the development of the world economy, the sharp increase in world population and the continuous improvement of people's living standards, the world energy demand continues to increase, followed by gradual depletion of global fossil energy, the aggravation of environmental pollution and other issues. Therefore, vigorously developing new and renewable energy technologies such as solar energy, wind energy, biomass energy, geothermal energy and ocean energy will become one of the important measures to reduce environmental pollution.

Our government has regarded the development of PV industry as an important aspect in the field of energy, and incorporated it into the basic policy of national energy development. The construction and use of PVPS will reduce the emission of certain greenhouse gases. Solar PV power generation will also not cause air and water pollution problems and waste residue stacking problems. It relieves the environmental pressure to a certain extent.

According to the feasibility study report of the Project, it is estimated that after the completion of Baodi 50MW Distributed PV Project, the annual average energy output will be 68,087,800 kWh, and about 20,800 tons of standard coal can be saved every year. Accordingly, about 55,400 tons of carbon dioxide (CO<sub>2</sub>), about 422.14 tons of sulfur dioxide (SO<sub>2</sub>), and about 142.98 tons of nitrogen oxides (NO<sub>X</sub>) can be reduced every year.

After the completion of Dashiqiao 50MW Distributed PV Project, it is estimated that the average annual energy output will be 65,898,000 kWh, and about 20776.325 tons of standard coal can be saved every year. Accordingly, about 55448.95 tons of carbon dioxide (CO<sub>2</sub>), 422.35 tons of sulfur dioxide (SO<sub>2</sub>) and 143.05 tons of nitrogen oxides (NO<sub>X</sub>) can be reduced every year.

The above data shows that distributed PV projects are helpful to improve the local atmospheric environment and promote energy conservation and emission reduction. In

addition, it can also save water and reduce the pollution of the water environment caused by hydraulic ash removal wastewater and warm drainage. Therefore, PVPS have good energy saving benefits, environmental benefits and social benefits.

10.2 Social and environmental protection investment

The static investment of PV power generation system of 50MW Distributed PV Power Generation Project in Baodi District is RMB 197.52 million, the dynamic investment is RMB 200.93 million, the static investment per kilowatt is RMB 3950/kW, and the dynamic investment per kilowatt is RMB 4018/kW. 25% of the Project is selfraised, and the rest is bank loans, with a loan interest rate of 4.6%. The environmental protection investment of the Project is about RMB 320,000, and the specific environmental protection investment estimation of the Project is shown in Table 9.2-1.

The static investment in the PV power generation system of Dashiqiao 50MW Distributed PV Power Generation Project is RMB 195 million, the dynamic investment is RMB 197.841 million, the static investment per kilowatt is RMB 3,900/kW, and the dynamic investment per kilowatt is RMB 3,956.8/kW. The source of funds is 25% self-raised and 75% loans. The environmental protection investment of the Project is about RMB 320,000, and the specific environmental protection investment estimation of the Project is shown in Table 9.2-2.

List of Environmental Protection Investment Estimation for 50MW Distributed PV

	Stage	Environmental	Amount of				
S/N		protection	investment	Remarks			
		investment item	(RMB 10,000)				
1	Construction period	Ambient air treatment	8	Set up fences, cover materials, clean the site, sprinkle water on the construction site to			
				reduce dust, etc.			
2		Water environment	2 Including car washing ta				
2		management	2	and sedimentation tank			
3				Measures such as setting up			
		Control of noise	5	work sheds for high-noise			
				machinery, strictly prohibiting			

Table 9.2-1

				1		
				high-noise equipment from		
				operating during work and rest		
				hours, and strengthening the		
				management of transportation		
				vehicles; sound insulation and		
				noise reduction measures and		
				equipment		
	-	Solid waste treatment	2	Temporary storage, removal		
4				and disposal of domestic		
				waste		
5		Ecological management	10	Creating of construction site		
5				Greening of construction site		
(	Operation period	Water environment	0	Mainly cleaning wastewater		
6		management		during the operation period		
7		Control of noise	3	Sound absorbers.		
		Solid waste	2	Recovery of PV modules and		
		management		damaged components		
	Total (RMB 10,000)		32			

List of Environmental Protection Investment Estimation for 50MW Distributed PV

Power Generation Project in Dashiqiao City

Tab	Table 9.2-2					
S/N	StageEnvironmental protectionAmount of investmentinvestment item(RMB 10,000)		Remarks			
1		Ambient air treatment	8	Set up fences, cover materials clean the site, sprinkle water on the construction site to reduce dust, etc.		
2		Water environment management	2	Including car washing tank and sedimentation tank		
3	Construction period	Control of noise	5	Measures such as setting up work sheds for high-noise machinery, strictly prohibiting high-noise equipment from operating during work and rest hours, and strengthening the management of transportation vehicles; sound insulation and noise reduction measures and equipment		
4		Solid waste treatment	2	Temporary storage, removal and disposal of domestic waste		

5		Ecological management	10	Greening of construction site	
6	Operation period	Water environment management	0	Mainly cleaning wastewater during the operation period	
7		Control of noise	3	Sound absorbers.	
8	period	Solid waste management	2	Recovery of PV modules and damaged components	
	Total (RMB 10,000)		32		

## 11. Conclusions and Suggestions

#### 11.1 Comprehensive Conclusions

#### (1) Main social impacts

The Baodi 50MW Distributed PV Project has been registered with the Administrative Examination and Approval Bureau of Baodi District, Tianjin for fixedasset investment projects of domestic enterprises (see Annex 1), and the project code is 2112-120115-89-03-984322. The Dashiqiao 50MW Distributed PV Project has been registered with the Administrative Examination and Approval Bureau of Dashiqiao for fixed-asset investment projects of domestic enterprises (see Annex 2), and the construction of the Project is legal.

The Project is an encouraged project in the Guidance Catalogue for Industrial Structure Adjustment (2019 edition), which conforms to the national industrial policy.

All procedures in the early stage of the Project shall be handled in accordance with the requirements of relevant laws and regulations, and relevant units shall review and approve them according to the scope of authority stipulated by laws and regulations, and there shall be no contents and procedures that do not meet the requirements of laws and regulations.

A total of group questionnaires filled out by 11 towns and subdistricts and 151 individual questionnaires filled out by villagers in 17 towns and subdistricts were collected in Dashiqiao City. A total of group questionnaires filled out by 10 towns and subdistricts and 302 individual questionnaires filled out by villagers in 10 towns and subdistricts were collected in Baodi District. Among the questionnaires, the main concerns of the public include lease compensation, HSE-compliant construction and environmental protection. Finally, the public involved in the Project basically support the construction of the Project.

(2) Main environmental impact

① Impact on ambient air

During the construction period of the Project, there are few factors affecting the atmospheric environment and the construction quantity is small. After effective

\*OFFICIAL USE ONLY

prevention and control measures are taken, there will be no great impact on the surrounding environment and residents.

During the operation period, the Project generates clean energy, which can save the use of standard coal and reduce the emission of polluting gases such as carbon dioxide.

2 Impact on the water environment

Since there is basically no production wastewater generated during the construction of distributed PV projects, only a small amount of construction vehicle washing wastewater is generated. After sedimentation, it can continue to be reused for construction water or sprayed to suppress dust, and it will not have a great impact on the surface water body.

During the operation of the Project, the water quality of PV panel cleaning water is basically the same as that of rainwater, and the main characteristic pollutant is SS, which enters the rainwater ditch through the local rainwater collection and drainage system and will not affect the water environment in the area.

③ Impact on acoustic environment

As the Project is installed and implemented on the roof or in the courtyard of each farmhouse, certain noise impacts may be generated during the construction process. However, the area of PV panels installed by each farmer is small, the construction time is short, and the impact on the farmer will disappear after the construction is completed.

The noise during the operating period of the Project mainly comes from the noise generated during the operation of the inverter. According to the feasibility study report of the Project, it is planned to use string inverters in the Project. This type of inverter has a fanless design and does not require a civil engineering room. It can achieve a low ambient noise of 33dB, and there is basically no noise impact.

④ Impact of solid wastes

During the construction period, the solid waste mainly includes a small number of waste parts generated from the installation of PV modules, mainly including residual materials of cables and leftover materials of section steel brackets, which shall be recycled and processed in a timely manner so that they will not be scattered in the construction site and will not have an impact on the environment.

During the operation of the Project, the waste accessories that may be generated due to damage or replacement after the service life expires will be uniformly recycled by the maintenance team, and no solid waste will be generated.

(5) Impact on ecological environment

The project construction area does not involve environmentally sensitive areas and wild animals and plants requiring key protection. During the construction process of the Project, the comprehensive protection measures combining engineering measures, vegetation measures, temporary measures and management measures will have little impact on the ecological environment in the Project area.

(3) Stakeholder engagement and information disclosure

The stakeholders of the Project mainly include governments at all levels and relevant institutions in the project area, project implementation institutions and construction units, various groups served by the Project, households providing roof rental for the Project and groups affected by construction. The Project has basically won the approval of all stakeholders, which is conducive to the smooth development of the Project. The publicity of ESIA information of the Project shall be posted on site. As of June 22 (two weeks after the publicity was posted), the Project sponsor and the assessment unit have not received the opinions and demands of the affected people on the Project.

(4) Establishment and management of GRM

Beijing Xiangju New Energy Technology Co., Ltd. will take the lead to establish a GRM team at the level of the project company, including the Project Contractor, Construction Contractor and Supervisor. Clarify the main body and division of responsibility and cooperation department for grievance handling of the Project, and implement the responsibility for grievance handling to individuals. In the process of work promotion, the communication and cooridination mechanism between government departments at all levels and village committees and villagers shall be established.

(5) Environmental and social management measures

Based on the overall risks, policy planning approval, project management, information disclosure, public opinion management, work safety and other factors, and

considering the decision-making, preparation, implementation and operation stages of the Project, measures such as protecting the rights and interests of farmers, protecting the health of the population, HSE-compliant construction management, information disclosure and communication are taken to ensure that the construction and operation of the Project minimize adverse impacts on society and promote social harmony and stability.

The production wastewater during the construction period of the Project will be reused for construction water or sprayed for dust suppression after sedimentation. The domestic wastewater in the construction area will be solved by relying on the original wastewater treatment system of the village; protect ambient air quality through construction management methods such as construction fences; protect the quality of acoustic environment through reasonable arrangement of construction time and other construction management methods; construction wastes shall be collected and recycled in a timely manner, and domestic wastes shall be disposed by village sanitation facilities.

(6) Overall conclusions

On the premise of taking various environmental protection measures and social risk precautionary approach, the construction of the Project has little impact on the environment and society. The Project is a distributed PV project. The construction of the Project is conducive to promoting the development of new energy industry, rationally utilizing local abundant solar resources, promoting energy conservation and emission reduction and improving the ecological environment, and providing additional income for local farmers, improving the living standard of farmers and building a harmonious society.

Therefore, under the conditions of comprehensively strengthening supervision and management and strictly implementing environmental protection measures and social risk precautionary approaches, the construction of the Project is feasible and beneficial.

#### 11.2 Recommendations

(1) Improve, perfect, implement and maintain the safety control measures and facilities for the risk sources of the Project in the subsequent construction and operation

process in strict accordance with national, industrial and local laws and regulations and relevant standards and specifications;


(2) After the completion of the Project, it is necessary to strengthen management, take scientific and effective measures, formulate emergency plans for accident prevention, strengthen safety education, improve the safety awareness of operators, strictly implement operating procedures, and prevent environmental risk accidents.


# Annex 1: Registration Form for Fixed Assets Investment Projects of Domestic-funded Enterprises in Tianjin

单位名称 花、花	17 A B	<b>客居孝</b> 爵	新能源科	技有限公	· 티	
项目名称	¥1 \$50	<b>机</b> 复顶分	布式光伏	发电项目	l	
项目代码 📜 🎽	2112	20 <mark>1</mark> 15-89	-039843	22		
建设地址	(天道) 印頃、小 頃、大)	ロ东街道 八门城镇	;大口屯 、大钟虎	演、王卜 演、新去	4、潮阳、朝霞、 - 広領、方家広領 (領、選客広領、 2領、部各広領牛	、林宇 新开口
行业类别 (小类)	电力, 怒力, 力,及 力,及 力, 及 力, 、 及 力, 、 及 力, 、 及 力, 、 及 力, 、 及 力, 、 及 力, 、 及 力 、 及 力 、 及 力 、 及 力 、 及 力 、 及 力 、 及 力 、 及 力 、 の 一 加 一 型 力 、 、 の 一 型 力	开业代 码 (小类)	D_4416	建设性)	ñ	新建
产业目录						
主要建设内容 及建设规模	新建50% 〉	<b>87虞顶</b> 分。	布式光伏	发电项目	购置相关设备—	台(套
		总投资技		资本会		4000
总投資 (万元)	20000	资金	资金来源		回内银行贷款	
		分列 (万元)		美他资金		0
房屋建筑面积(平方米)					项目占地面积	
拟开工时间	2022年(	DI A			拟竣工时间	2022年 12月

天津市内资企业固定资产投资项目备案登记表

# Annex 2: Filing Certificate of Roof and Courtyard Distributed PV Power Generation Project of Yingkou Huirong Power Engineering Co., Ltd.

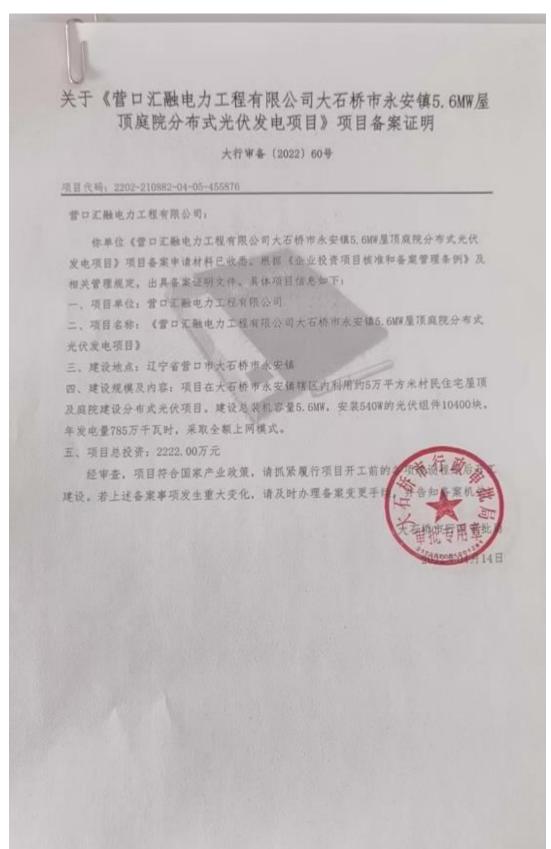

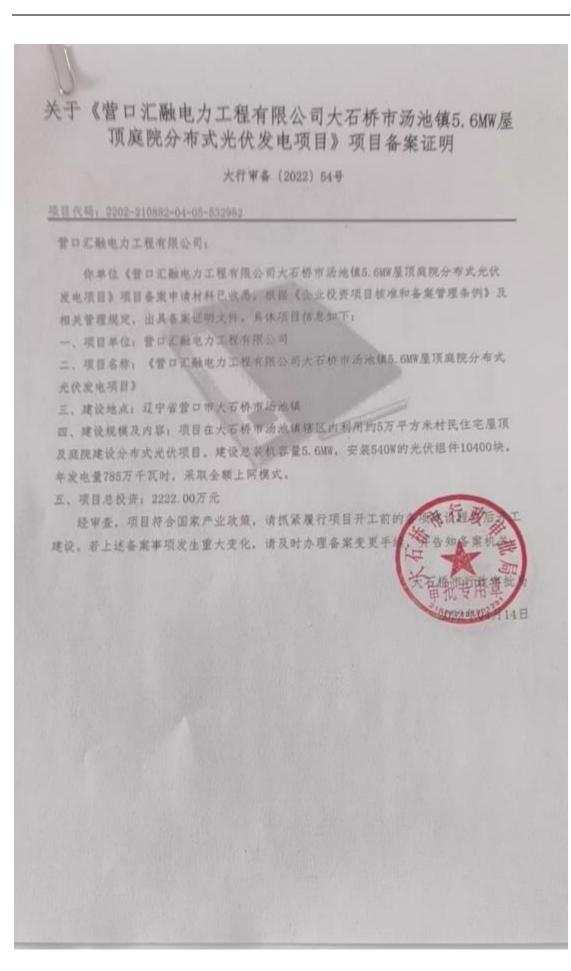

# 关于《营口汇融电力工程有限公司大石桥市水源镇5.6MW屋 顶庭院分布式光伏发电项目》项目备案证明

大行审备 (2022) 56号

项目代码: 2202-210882-04-05-721691

营口汇融电力工程有限公司:

你单位《营口汇融电力工程有限公司大石桥市水源值5.6MW屋顶直院分布式光伏 发电项目》项目备案申请材料已收悉。根据《企业投资项目核准和备案管理条例》及 相关管理规定。出具备案证明文件。具体项目信息如下1

一、项目单位1 营口汇融电力工程有限公司

二、项目名称:《营口汇融电力工程有限公司大石桥市木漂镍5.6MW屋顶庭院分布式 光伏发电项目》

三、建设地点: 辽宁省营口市大石桥市水源镇

四、建设规模及内容:项目在大石桥市水源值辖区内利用约5万平方米村民住宅屋顶 反庭院建设分布式光伏项目。建设总装机容量5.6MW,安装540W的光伏组件10400块, 年发电量785万千瓦时,采取全额上网模式。

五、项目总投资: 2222.00万元

经审查,项目符合国家产业政策,请抓紧履行项目开工前的; 建设。若上述备案事项发生重大变化,请及时办理备案变更手续,

# 关于《营口汇融电力工程有限公司大石桥市石佛镇5.6MW屋 顶庭院分布式光伏发电项目》项目备案证明

大行审备 (2022) 59号

项目代码: 2202-210882-04-05-555886

营口汇融电力工程有限公司:

你単位《曾口汇融电力工程有限公司大石桥市石佛镇5.6MW屋顶庭院分布式光伏 发电项目》项目各案申请材料已收悉。根据《企业投资项目核准和备案管理条例》及 相关管理规定,出具各案证明文件。具体项目信息如下:

一、项目单位: 营口汇融电力工程有限公司

二、项目名称:《营口汇融电力工程有限公司六石桥市石值值5.6MB屋顶庭院分布式 无伏发电项目》

三、建设地点: 辽宁省营口市大石桥市石佛镇

四、建设规模及内容:项目在大石桥市石佛镇辖区内利用约5万平方米村民住宅屋顶 及庭院建设分布式光伏项目。建设总装机容量5.6MW,安装540W的光伏组件10400块。 年发电量785万千瓦时,采取全额上网模式。

五、项目总投资: 2222.00万元

经审查,项目符合国家产业政策,请抓紧履行项目开工前的各环发投行的 建设。若上述备案事项发生重大变化,请及时办理备案变更手续,发告知备案材

# 关于《营口汇融电力工程有限公司大石桥市旗口镇5.6MW屋 顶庭院分布式光伏发电项目》项目备案证明

大行审备 (2022) 62号

项目代码: 2202-210882-04-05-408449

营口汇融电力工程有限公司:

你单位《营口汇融电力工程有限公司大石桥市旗口镇5.6MW屋顶庭院分布式光伏 发电项目》项目备案申请材料已收悉。根据《企业投资项目核准和备案管理条例》及 相关管理规定,出具备案证明文件。具体项目信息如下:

一、项目单位: 营口汇融电力工程有限公司


二、项目名称:《营口汇融电力工程有限公司大石桥市旗口镇6.6MW屋顶庭院分布式 光伏发电项目》

三、建设地点: 辽宁省营口市大石桥市旅口镇

四、建设规模及内容:项目在大石桥市旗口镇辖区内利用约5万平方米房屋顶及庭院 位置建设分布式光伏项目。以能源合作管理模式,建设总装机容量5.6MW,安装540W 的光伏组件10400块,年发电量785万千瓦时,采取全额上网模式。

五、项目总投资: 2222.00万元

经审查,项目符合国家产业政策,请抓紧履行项目开工前的各个关设存, 建设。若上述备案事项发生重大变化,请及时办理备案变更手续,签告知备3

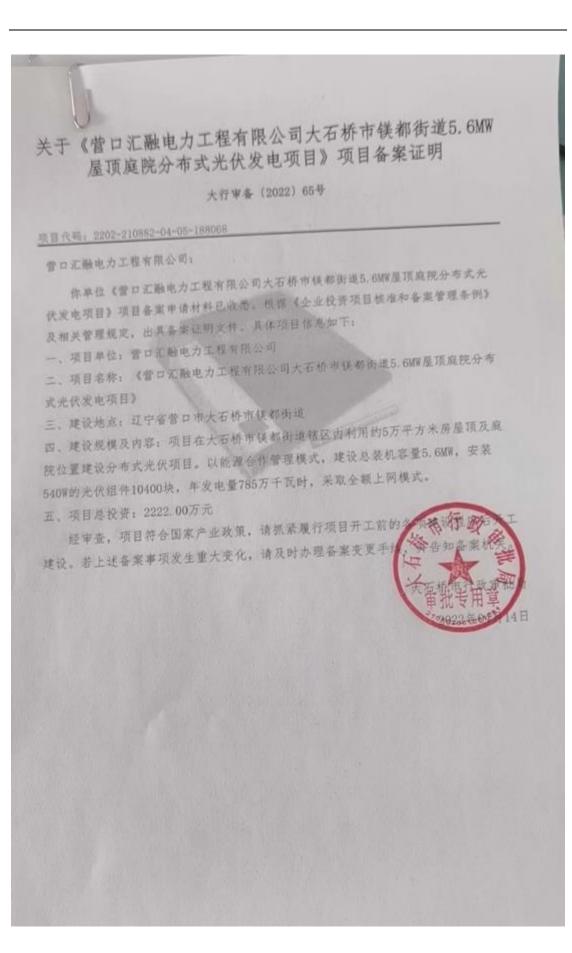

# 关于《营口汇融电力工程有限公司大石桥市金桥街道5.6MW 屋顶庭院分布式光伏发电项目》项目备案证明

大行审备 (2022) 53号

项目代码: 2202-210882-04-05-850657

营口汇融电力工程有限公司;

你单位《营口汇融电力工程有限公司大石桥市金桥街道5.6MW屋顶庭院分布式光 伏发电项目》项目备案申请材料已收悉。根据《企业投资项目核准和备案管理条例》 及相关管理规定,出具备案证明文件。具体项目信息如下:

一、项目单位:营口汇融电力工程有限公司

二、项目名称:《营口汇融电力工程有限公司大石桥市金桥街道5.6MW屋顶庭院分布 式光伏发电项目》


三、建设地点: 辽宁省营口市大石桥市金桥街道

四、建设规模及内容:项目在大石桥市金桥街道辖区西利用约5万平方米村民住宅屋 顶及庭院建设分布式光伏项目。建设总装机容量5.6MW,安装540W的光伏组件10400 块,年发电量785万千瓦时,采取全额上网模式。

五、项目总投资: 2222.00万元

经审查,项目符合国家产业政策,请抓紧履行项目开工前的各 建设。若上述备案事项发生重大变化,请及时办理备案变更手续,



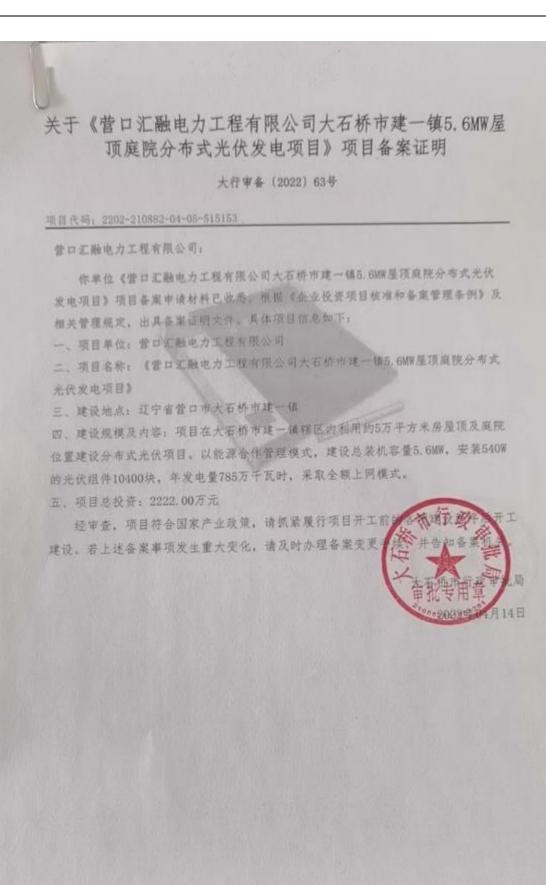

# 关于《营口汇融电力工程有限公司大石桥市黄土岭镇5.6MW 屋顶庭院分布式光伏发电项目》项目备案证明

大行审备 (2022) 64号

该县代号: 2202-210882-04-05-147045

昔口汇融电力工程有限公司;

你单位《营口汇融电力工程有限公司大石桥市黄土岭镇5.6MW屋顶庭院分布式光 代发电项目》项目各案申请材料已收悉。根据《企业投资项目核准和各案管理条例》 及相关管理规定,出具备案证明文件。具体项目信息如下:

一、项目单位: 营口汇融电力工程有限公司

二、项目名称:《营口汇题电力工程有限公司大石桥市黄土岭镇5.6MW屋顶庭院分布 式光伏发电项目》


三、建设地点: 辽宁省营口市大石桥市黄土岭镇

四、建设规模及内容:项目在大石桥带黄土岭镇辖区内利用约5万平方米房屋顶及庭 院位置建设分布式光伏项目。以能源合作管理模式,建设总装机容量5.6MW,安装 5400的光伏组件10400块,年发电量785万千瓦时,采取全额上网模式。

五、项目总投资: 2222.00万元

经审查,项目符合国家产业政策,请抓紧履行项目开工前的各 建设。若上述备案事项发生重大变化,请及时办理备案变更手续、



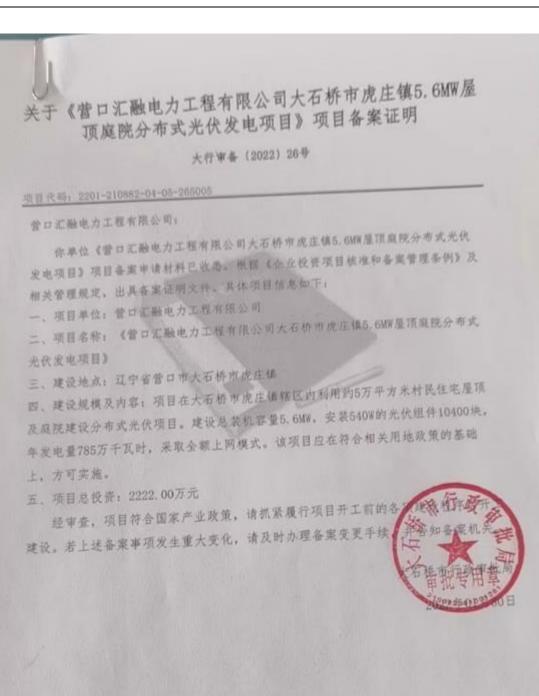

# 关于《营口汇融电力工程有限公司大石桥市沟沿镇5.6MW屋 顶庭院分布式光伏发电项目》项目备案证明

大行审备 (2022) 58号

项目代码: 2202-210882-04-05-555992

营口汇融电力工程有限公司:

你单位《营口汇融电力工程有限公司大石桥市沟沿值5.6MW屋顶庭院分布式光伏 发电项目》项目备案申请材料已收悉。根据《企业投资项目核准和备案管理条例》及 相关管理规定,出具备案证明文件。具体项目信息如下:

一、项目单位: 营口汇题电力工程有限公司

二、项目名称:《营口汇融电力工程有限公司大石桥市沟沿值5.6MW屋顶庭院分布式 光伏发电项目》


三、建设地点: 辽宁省营口市大石桥市沟沿镇

四、建设规模及内容:项目在犬石桥市沟沿值辖区内利用约5万平方米村民住宅屋顶 及庭院建设分布式光伏项目。建设总装机容量5.6MW,安装540W的光伏组件10400块, 年发电量785万千瓦时,采取全额上网模式。

五、项目总投资: 2222.00万元

经审查,项目符合国家产业政策,请抓紧履行项目开工前的 建设。若上述备案事项发生重大变化,请及时办理备案变更手续,



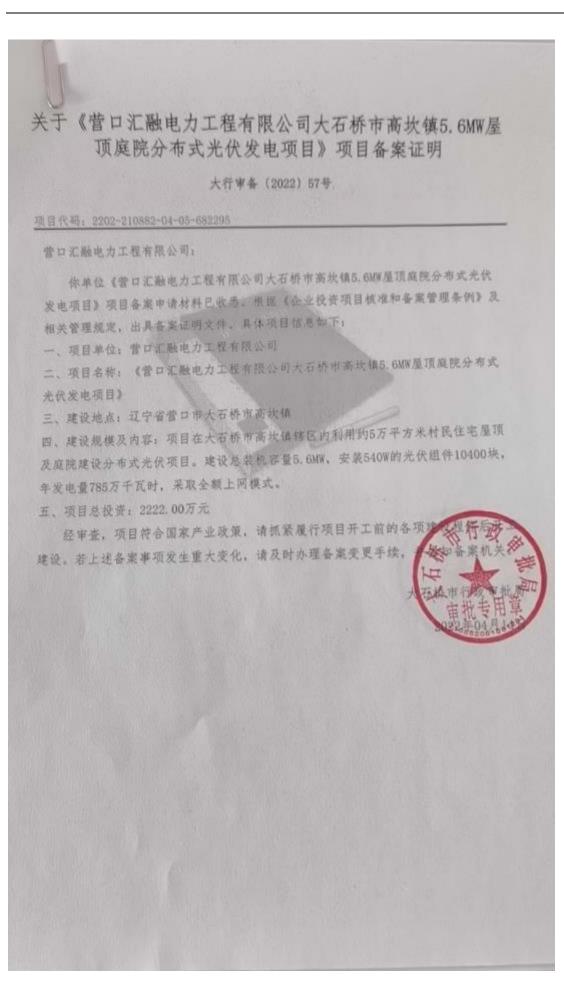

# 关于《营口汇融电力工程有限公司大石桥市钢都街道5.6MW 屋顶庭院分布式光伏发电项目》项目备案证明

大行审备(2022)52号

项目代号: 2202-210882-04-05-129121

营口汇融电力工程有限公司:

你单位《营口汇融电力工程有限公司大石桥市锅都街道5.6MW雇顶庭院分布式先 伏发电项目》项目备案申请材料已收悉。 积据《企业投资项目核准和备案管理条例》 反相关管理规定, 出具备案证明文件, 具体项目信息如下:

一、項目単位: 营口汇融电力工程有限公司


二、项目名称:《营口汇融电力工程有限公司大石桥市钢都街道5.6MW屋顶庭院分布 式光伏发电项目》

三、建设地点: 辽宁省营口市大石桥市铁都街道

国、建设规模及内容:项目在大石桥市钢都街道辖区内利用约5万平方米居民住宅屋 顶及庭院建设分布式光伏项目。建设总装机容量5.6MW,安装540W的光伏组件10400 块,年发电量785万千瓦时,采取全额上网模式。

五、项目总投资: 2222.00万元

经审查,项目符合国家产业政策,请抓紧履行项目开工前的各 建设。若上述备案事项发生重大交化,请及时办理备案变更手续,案告

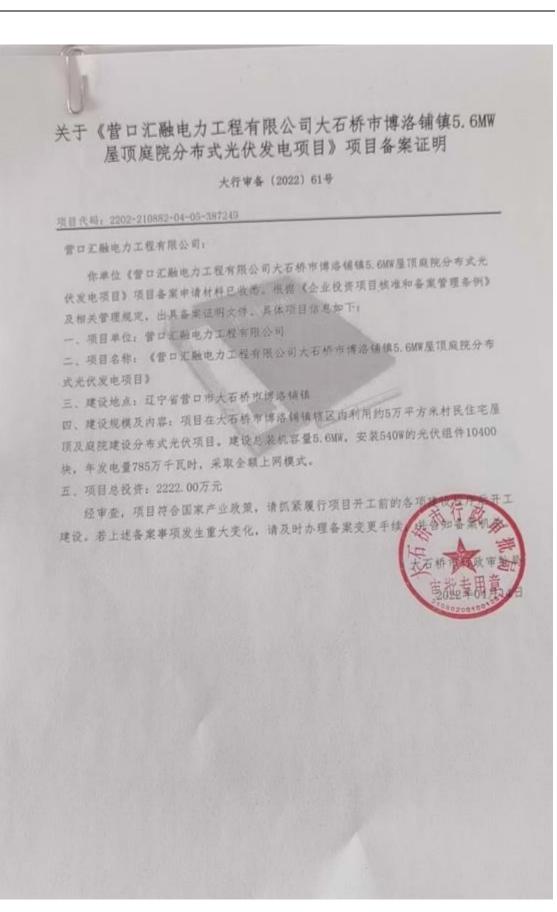

关于《营口汇融电力工程有限公司大石桥市官屯镇5.6MW屋 顶庭院闲置荒地分布式光伏发电项目》项目备案证明

大行审备 (2022) 66号

曾口汇融电力工程有限公司;

项目代码: 2202-210882-04-05-330484

你单位《营口汇融电力工程有限公司大石桥市官屯镇5.64W屋顶庭院闲置荒地分 布式光伏发电项目》项目备案申请材料已收悉。根据《企业投资项目核准和备案管理 条例》及相关管理规定。出具备案证明文件。具体项目信息如下:

一、项目单位:营口证题电力工程有限公司

二、项目名称:《营口汇融电力工程有限公司大石桥市官屯镇5.6MW屋顶庭院闲量荒 地分布式光伏发电项目》

三、建设地点: 辽宁省营口市大石桥市家屯镇

四、建设规模及内容:项目在大石桥市官屯镇辖区内利用约5万平方米村民住宅屋顶 庭院及闲置荒地建设分布式光伏项目。建设总装机容量5.6MW,安装540W的光伏组件 10400块。牟发电量785万千瓦时,采取全额上网模式。

五、项目总投资: 2222.00万元

经审查,项目符合国家产业政策,请抓紧履行项目开工前的各项 建设。若上述备案事项发生重大变化,请及时办理备案变更手续, 关于《营口汇融电力工程有限公司大石桥市百寨街道5.6MW 屋顶庭院分布式光伏发电项目》项目备案证明

大行审备 (2022) 67号

项目代码: 2202-210882-04-05-156058

曾口汇融电力工程有限公司:

你单位《管口汇融电力工程有限公司大石桥市百寨街道5.6%隙屋顶庭院分布式光 伏发电项目》项目备案申请材料已收悉。根据《企业投资项目核准和备案管理条例》 及相关管理规定,出具备需证明文件。具体项目信息如下:

一、项目单位: 晋口汇融电力工程有限公司


二、项目名称:《营口汇融电力工程有限公司大石桥市百寨街道5,6MW屋顶直院分布 式光伏发电项目》

三、建设地点; 辽宁省营口市大石桥市百寒街道

四、建设规模及内容:项目在大石桥市百寨街道辖区内利用约5万平方米房屋顶及庭 院位置建设分布式光伏项目。以能源合作管理模式,建设总装机容量5.6MW,安装 540%的光伏组件10400块,年发电量785万千瓦时,采取全额上网模式。

五、项目总投资: 2222.00万元

经审查,项目符合国家产业政策,请抓紧履行项目开工前的名 建设。若上述备案事项发生重大变化,请及时办理备案变更手续

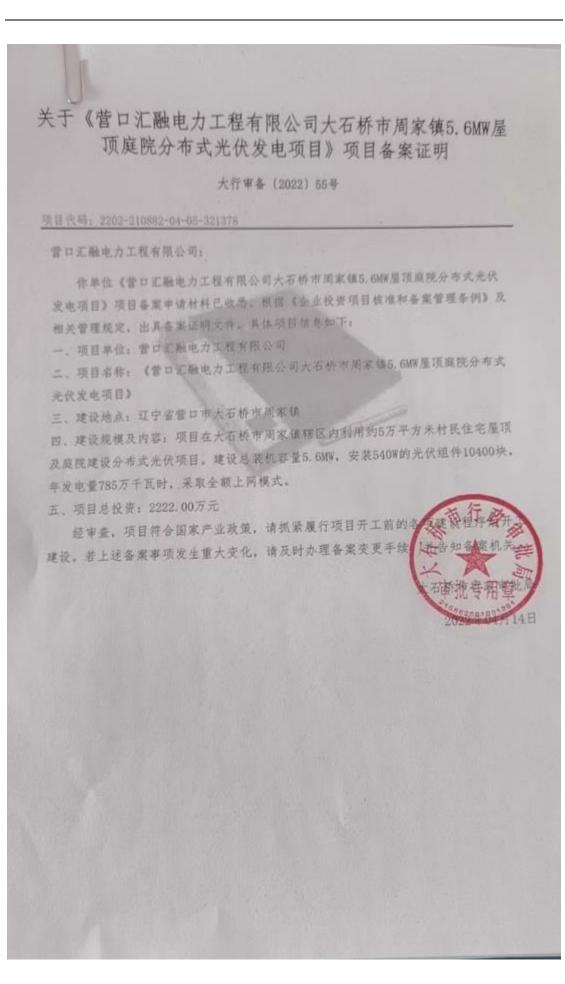

# Annex 3: ESIA Information Publicity of Dashiqiao and Baodi Distributed PV Projects

# 建设项目环境社会影响评估信息公示

北京东居委能派科与有限公司制度设计。"含大百倍山2040岁年北方为发展10万日,项目万境社会财产4百万万境社会同学1为根据满刻工作自中国总臻集团的东奥测设计研究结构公司进行。积增卫济基础少能分级银行《环境合社会框架》相关要求,《中东大门中和医环境货柜 法书、中华人民共和国对指数前钟学法书《国家发展和改革委关于部发国家发展改革委师大医学资产传被项目在会设定风险评估暂行力法的通知》 知》20回客院会第1231号。"建设项目环境间把管理条例》有关极定,为了进一步修好应应或"工作,现代素分项目基本情况。"汉目读说的意 文、项目文选线及时中、环境社会影响评估主要内容。征者公司家氏的主要的变,但长公文意见的主要方式等相关的变形点。

# 一、 建设项目基本情况

**王惠希斯**·辽宁省大石桥市「JUVIP 分布以代收电响目

#### 項動性質に可定

**王冠書操業長**体次後経理的大石橋市 2004期分布式完成发展第三次中月先後电影,永用半合数上熱型的非対方式。初始安美 340%9 年島 建大時設电地租件 30-90 场。英伟安装著望然推续农户的建設向安装面积确定,通常的 10-2003年,根据实际安装著望香灌光在注意器》音。 波变激出线线入汇论版旧都化着,根据总器指搭重,修复面据照重。系统设备实成为估别件根据效率查定表。计算出近常的光计的防卫单位 6890.8万千万万。与约利用小利于3206。35 年总发电空为 164743.885 万千万时。

(1)山、電力器:根違理告充電量的構成才和・1.2.5局部採業用 540%) 単態調性・2.5层目根据的網路成合的各类型交換区域炒加器组件・以為 为単位交換 1 差 10×50% 変換用電気支援、分野加密電力 5060%・約 2000 戶

(2) 土壤工程:项目大战组件交错在版台漆就物的偏面或测定工作。现台集站对五层无关的冻结构,适合安装洗状组件。

# 二、 項目建設的言文

本工程所在区域大印始资源丰富。初华交遭便利,并«操作价、是建态无常发电知的核内理想的通址。同时本工程的开发符合同构绿支域 的原则和医家能发发复数受力器,专利上线减多增度的压力,带起的方经透明和发展指指制积极作用。

## 三、 项目实施涉及的团体

二程建设工表参照的图准先过宁省人占裕市希句乡间。

## 四、 环境社会影响评估主要内容

为此的大谋头上就跑。我那知脸刺激上程这随可能带来影响社会设定的风险。按照中国电话集团华东影响员已经觉动着即公司组织实施该 了程订编社会影响伊西丁作。

#### 五、 征求公众意见的主要内容

字要 电指计会和于程实使艺术公众,特别是"Fi本 工程合直接利益关系"的深刻和自关部门改变研究工程的意见,项目可能在存的风险因素。 别忆这份 带错的的意见课纸等。

## 大、 征求公众意见的主要方式

社会和工程实施回报公司以以书面偏近,电子邮件,电话,传育等方,此行有入意力交过温水差包或详密实施单位,接触通见和立法意见 的方式和下:

建设单位: 北京乡居甸就原料该有限公司	计估单位;中国电缆集团华东数则设计研究的有限公司
Q系地址: 北京市特委区村社路113号南上层204室	脱离地址:《社会优加市东抗区高数路300号:号援
既名人: 李凯	脱系** 企工
电話: 11) 20/3631	电话: 1571 2002005
电」曲件:204.014.56 app.com	电子曲件: yu liq sheke rea

# 七、征求公众重见起止时间

自然かたお話りで工作計算。

北京多居斷電導科技有陳公司

2022年6月8日

# 建设项目环境社会影响评估信息公示

北京乡者新的原料点有限公司财建设天津古言地口的环境济市民产供发电项目,以自环境社会物种省及环境社会管理计划把告诉制用中 由中国电理集团学家勘测设计研究院有限公司运行。把握卫州基础设施投资能行《环境与社会框架》组页要求 《中学人民共和国环境保护法》。 中华人民共和国环境影响和行动》《国家集团和改革委人士和公国家》表彰至委争去最美资本投资项目计会经表现随任者行动业的确如》还 国务特伦第《12 号《建设项目环境保护管理条例》有人规定,为了进一步设备公委与工作。现代建设公司要求债况,项目建设时意义,项 目实研发型团体、环境社会联络运行事实内容,研究公会复见的主要内容。已将公会复历的主要方式等相关内容不成立示。

## 一、 建设英日基本委议

工程保存,于这市宝坛区以2000分布式大仅发电响);

# 項目物系・分遣

工**把自设销售**(本次均均的重用 N 1000 分布式代式使用项目为户用代认电站,采用" 当就上网"的并对方式。约户获获 140% 年最進 估定**能**使他们在 35 保,我的法院沿量为 11 S2kM ps 罗考 13 K 代达应数量 1 合。应该器"公税"》居民依旧就电输。根据总数机沿量、价价面 **编织**型、熟悉为不必及代试组件所称为不要改革。计算出代试电应用比如电应为 60% 等 万千页的。年期间用引引了9% 6%,常年需发电量为 14 K 9 X 为于免疫。

(1)电气工程: 供编现有宽度面的初步排带,本沙自构及用 \$40%1 单肢组件。本10月各类型度面的希普细律约型的 2 乐,并 22 既组件。 安装:台口22 编用表注交器。总装动管型的 \$10%3、共行 4212 户。

(4) 十铼干锋:项目光优组件安装在既有铼筑物的层面上。

# 二、 项目建设的建义

本上程所在区域发出就等原丰富。2秒 又通便问,并河的针索,是建设先仅发电站的短为更熟的端址。间时本上程的开发符合同特殊发展 的原则和国家教师发展就常方针,有利于发展环境保护上示,带动地方经济快速发展将起到积极作用。

### 三、项目奠基财政的团体

丁程建设主要涉及前团体本大学上 定抓肉部分等道。

# 四、 环境社会影响评估主要内容

为你买人服装上纸刷,预防和控制%干好买银肉能需来到的社会稳定的风险,要把中国制**建型土**丝东要到设计研究会制造型制度主领诊 工程环境社会教育评估工作。

### 五、 征求公众意见的主要内害

主要把本杜告的工程完整日线公众,特别是与本工程有直接利益关系的联合和有人都,因果能够工程的意见,顺目可能存在的问题出版。 对机能供应措施的意见重误等。

# 六。 征求公众童见的主要方式

社会和工程实施回报公グ可以以书面信题、电子部件、电话、传单等方式将有关意见完整建设单位式评估实施中的。按照意见和运动意见 的方式和下:

深ら単位: : ::京幸客国新紀時料約市第公司 「勝略転位: : :北京市特天宮开設路 113 号同王県 334道 | 脱系人: | 空創 | 市活: CIC-88578681 | 市子邮件: : 25479927@qq;:504 译估单位:中国的读集团体会教训技计研究绘作那些词 联系地址:浙江省校州社会机区基约路 201 号 3 号考 联系人:会于 11.話:0571-56525057 41.子语样:ym\_falgNatoriom

## 七、 征求公众意见起止时间

自己テクロ起いてて作られる。

#### 北东乡西新世教科拉有限公司

20122年6月8日

٩

# Annex 4: Scanning Copy of Questionnaire for Dashiqiao and Baodi Distributed PV Projects (Partial)

# 天津市宝坻区 50MW 分布式光伏发电项目 环境社会影响评估公众意见调查表(团体)

单位名称	要的	植物时相能	5	单位性质		
单位地址			联系方式	83220 2586		
填表人				职务	支部为犯	)
与本工程的	<b>市田共区</b>	日石段影响区内	口工程	影响区外	口搬迁单位团体	口其他单位团体
540mp単品硅 居民低压配用 计算出光伏明 瓦时。 根据国家	太阳能电剂 3箱。共计 3站年均发 8相关法律	h组件28 块,实际多 安装50MW。根据总制 电量为6808.78 万千	2装容量为1 2机容量、1 F瓦时,年5 14程中应充分	14.98kWp,安 與斜面辐照量 均利用小时13 分考虑公众意	装10kW允仅建变器1 、系统效率以及光伏 61.68b,25 年总发F	并网方式,每户安装 台。逆变器出线接入 组件标称效率衰减等 电量为170219,50万千 发放本调查表,征求
一、问卷选择	~(在口内	打√)				
1、您和本工	程的位置; 发房屋被长	代系:		被临时租赁 m 范围内	<ul> <li>□ 不涉及租赁房</li> <li>□ 500m 惹圈外</li> </ul>	E
口有利影响	1 07			有不利影响但	可接受	
口租金补偿	¥ 🗆 🕽	单位土地,贵单位希 共它				
口 租赁补偿	1 🗆 3	a位最关注的问题是 E 通影响 E 文明 E 会治安 D 其它	別施工 [	口 生态破坏	-	
<b>N</b> /T理安全	运行 🖻	THE PARTY IT INCOME	」环境影响			
1 民众不会	反对 口	和「能受到公众关注 社会治安环境受差 发放 口 不文明施	口 造成3	不境污染 口	F哪些(可多选): 遺成生态破坏 □	补偿金不合理
7、您认为本 • 如加强环僚	工程帶加強 和安保措	【哪些有关措施: 施 口制定相关处置	〖预案 □	」与利益相关力	方加强沟通 口加强	施工管理
3、在上述预 日文持建设		]落实后,贵单位对: ]建设无所谓		态度:		
三、贵单位劝	本工程的	其它意见或建议:		8		
				*		

# 辽宁大石桥市 50MW 分布式光伏发电项目 环境社会影响评估公众意见调查表(团体)

22 H C

本次拟建的	汤沙绿、泛瓜 汤子也族 今天委	联系方式	13840704722
与本工程的位) 本次拟建自	255.00 26.22		
本次拟建的	XXXX	职务	人大副主席
本次拟建的	電关系 口工程影响区内	口工程影响区外	口搬迁单位团体 口其他单位团体
出线接入居民( 效率衰减等, 164743.88万千 根据国家/	单品建太阳能电池组件36; 5.压配电箱。共计安装5000 计算出光伏电站年均发电 瓦时。	快,实际安装容量为1 ,根据总装机容量、4 量为6589.8万千瓦时 2影响评估调查过程中	代电站,采用"全额上网"的并网方式。标 9.44kWp,安装20kW光伏逆变器1台。逆变器 顺斜面辐照量、系统效率以及光伏组件标码 1,年均利用小时1329h,25年总发电量为 回应充分考虑公众意见,因此特向贵单位发
一、问卷选择	(在口内打√)		
□ 可能涉及:		「能涉及土地被临时租 0 <sup>~</sup> 500m 范围内  【	<ul><li></li></ul>
回 有利影响		影响 🗆 有不利影	101 () 2.8 (10)
3、若工程建设 风 相赁补偿	租赁费单位土地,贵单位; 口 其它	希望的租赁补偿方式。	d:
□~租赁补偿	<ul> <li>段, 贵単位最关注的问题;</li> <li>□ 交通影响 □ 文</li> <li>□ 社会治安 □ 其</li> </ul>	明施工 口 生态和	皮坏
5、工程运行阶	段,贵单位最关注的问题。 行 □ 居民身体健康	Ľ. /	社会治安 □ 其它
□ 民众会反邓	工程可能受到公众关注或 † □ 社会治安环境变差 时足額发放 □ 不文明)	□ 造成环境污染	有哪些(可多选): □ 造成生态破坏 □√补偿金不合理
7、您认为本工 口加强环保利	程需加强哪些有关措施: 中安保措施 口制定相关处	黑顶案 司馬利益相	目关方加强沟通 口加强施工管理
8、在上述预防 口支持建设	- 告施得到落实后,贵单位x 口反对建设 口无所i		
二、贵单位对本	工程的其它意见或建议:		

.

	李缕	性 别	字	年龄	42	民族	18	
文化程度	white the the			职业	the			
身份证号	1222496806182816			联系方式	13821459077			
本次孤 装540%p单晶 接入居民低 衰读等,计 170219.50万 根据国 求工程建设 一、何卷选	建的宝珠(2500) h硅太阳能电池 医配电箱。共计 算出光伏电站 计千瓦时。 家相关法律法:	(4)分布3,5元(7) (2)组件28 块,9 (十安装500%。 村 年均发电量为) (現,在验收调查 (2)分平的影响。 (2)分子	2003年1237 125日 125日 125日 125日 125日 125日 125日 125日	街道 2444 声用光伏电站, 服为14.98kWp, 参量、倾斜面辐 5千瓦时,年均 充分考虑公众重 应的合作!	安装10kW光 照量、系统 利用小时13	伏逆变器1 台 版率以及光伏 51,68h,25 (	。之文中出 组件标称效 年总发电量	
2、您认为本 1、有利影 3、若工程如 1、祖赁补 4、关于本工	二程建設可能 南 口 不利 役租赁您家宅 管 口 其它 同建设,您最	基地等,您希	:: 記影响 □ 望的补偿方  (可多迭):	有不利影响值  式是: 		范围外		
口 文明施 5 项目建设	E □ 社会 会引起群众的 会反对 □	治安 口 非	4它 可能的原因 口 不文	有哪些(可多) 明施工 日	选);	括		
日不合理	设单位应该如 意保护和安全持	普施 口 制	定相关处置	陰问题(可多) 預案 □/与 强施工管理	利益相关方	加强沟通		
6、您认为建 回 加强环境	及地方政策合理	里进行征地补偿					_	

辽宁大石桥市 50MW 分布式光伏发电项目 环境社会影响评估公众意见调查表(个人)

姓名	盛天龙 性别	197	年 龄	31	民族	汉
文化程度	永刀中		职业	工人		
身份证号	21088219910521	614	联系方式	13/241	71300	
	花精市(区、县石)		、街道雨台		±12386-1-	自然村(組)
准户安装540 器出线接入J 标称效率衰3 164743.88万 根据国3	生的大石桥市5000分布式) №0 单晶雄太阳能电池组件 雷民低压配电箱。共计安明 或等,计算出光伏电站年5 (千瓦时。 家和关法律法规,在验收制 期间对周边环境带来的影响	36块,实际安; 表500%,根据总 为发电量为6589 例查过程中应充	裝容量为19 。裝机容量、 9.8万千瓦时 :分考虑公众:	44kWp,安装 倾斜面辐照量 ,年均利用小	20kW光伏道变: Ł、系统效率均 N时1329h,25:	器1台、逆变 【及光伏姐件 年总发电量为
	译(在口内打√)	ra 2 - Val. Val. 94, 1712				
居住地距为本 居住地距为本 2、您认为和影理 3、若工程补 4、关于本工 5、项目建设	設租赁您家宅基地等,您 当 其它 程建设,您最关注的问题 当 □ 环境保护 □ □ 社会治安 □ 公引起群众的关注,您认 会反对 □ 造成环境污	· □ 100 <sup>~50</sup> 来: 无影响 □ 希望的补偿方: 	0n 范围内 有不利影响 武是: * 1月 有哪些(可多	□ 500 但可接受 一 分支全运行 一 5.50);		
6. 您认为建 又加强环结 又按国家2	设单位应该如何预防可能	出现的社会风 制定相关处置 补偿 口 加?	「「「「」「「」「」 「「」」「「」」 「「」」「」「」」 「」」 「」」」 「」」」 「」」」 「」」」 「」」」 「」」」 「」」」 「」」」 「」」」 「」」」 「」」」 「」」」 「」」」 「」」」 「」」」 「」」」」 「」」」 「」」」」 「」」」 「」」」」 「」」」」 「」」」」 「」」」 「」」」 「」」」 「」」」 「」」」 「」」」」 「」」」 「」」」」 「」」」」 「」」」」 「」」」」 「」」」」 「」」」」 「」」」」 「」」」」 「」」」」 「」」」」 「」」」」」 「」」」」」 「」」」」 「」」」」 「」」」」」 「」」」」 「」」」」 「」」」」 「」」」」」 「」」」」 「」」」」 「」」」」 「」」」」 「」」」」 「」」」」 「」」」」 「」」」」 「」」」」 「」」」」 「」」」」 「」」」」 「」」」」 「」」」」」 「」」」」」 「」」」」」」	与利益相关力		
口 支持建设	<ul> <li>□ 反对建设</li> <li>工程的其他建议:</li> </ul>	U AR				
	A	2				